


HF TRANSCEIVER
TS-870S
 SERVICE MANUAL

KENWOOD

© 1995-8 PRINTED IN JAPAN
 B51-8296-00(N)1360

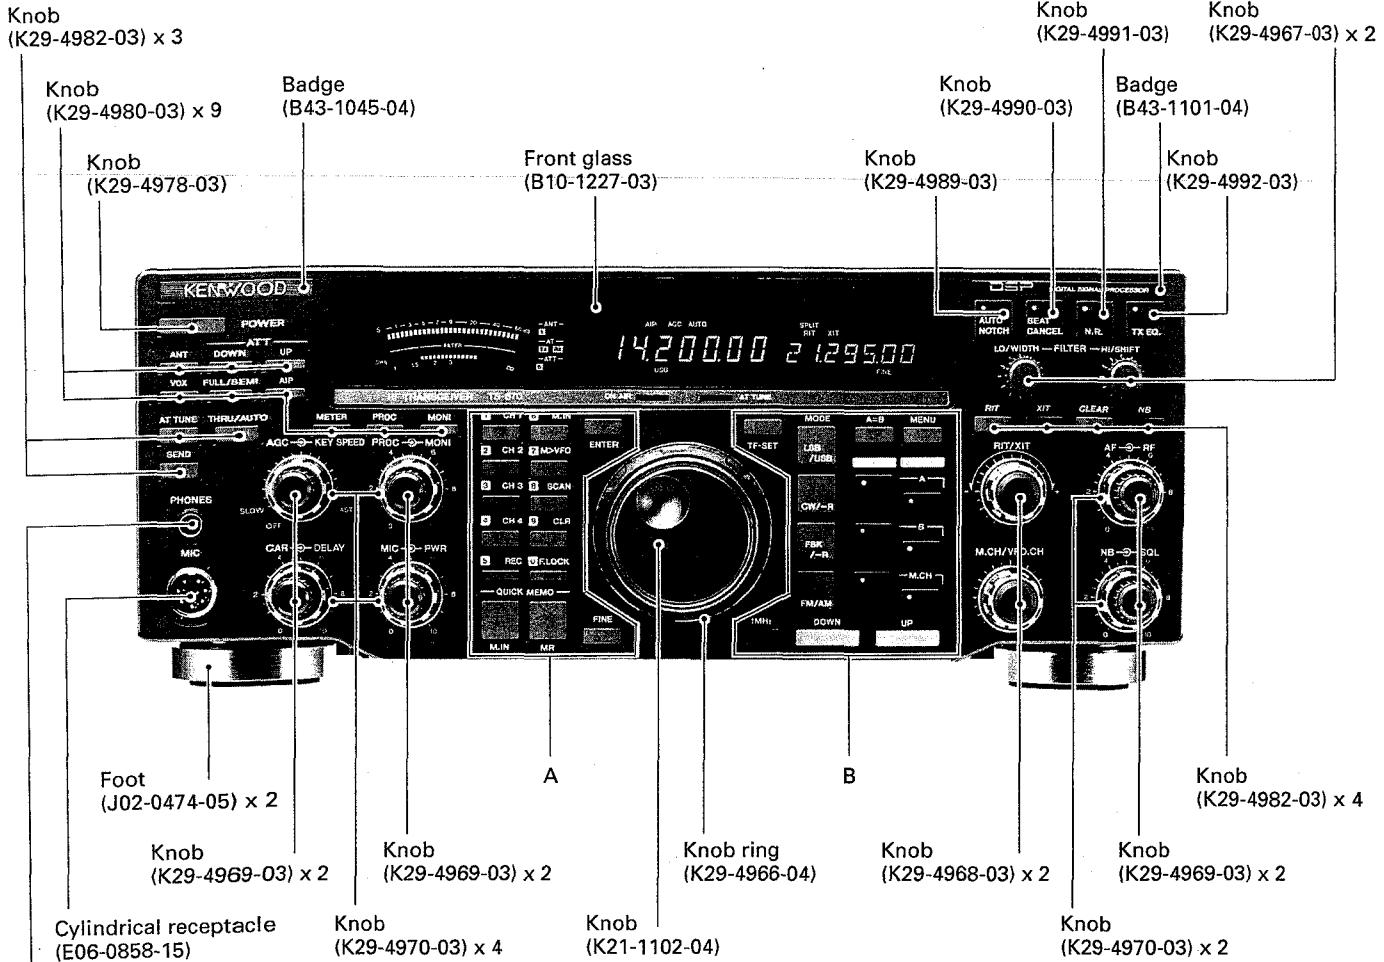

A

| | | |
|--------------------|--------------------|--------------------|
| Knob (K29-4982-03) | Knob (K29-4982-03) | Knob (K29-4982-03) |
| Knob (K29-4982-03) | Knob (K29-4982-03) | |
| Knob (K29-4982-03) | Knob (K29-4982-03) | |
| Knob (K29-4982-03) | Knob (K29-4982-03) | |
| Knob (K29-4980-03) | Knob (K29-4980-03) | |
| Knob (K29-4984-03) | Knob (K29-4984-03) | Knob (K29-4982-03) |

B

| | | | |
|--------------------|--------------------|--------------------|--------------------|
| Knob (K29-4982-03) | Knob (K29-4985-03) | Knob (K29-4982-03) | Knob (K29-4982-03) |
| | Knob (K29-4986-03) | Knob (K29-4983-03) | Knob (K29-4981-03) |
| | Knob (K29-4987-03) | Knob (K29-4983-03) | Knob (K29-4981-03) |
| | Knob (K29-4988-03) | Knob (K29-4983-03) | Knob (K29-4981-03) |
| Knob (K29-4982-03) | Knob (K29-4979-03) | | Knob (K29-4979-03) |

4525

TS-870S

CONTENTS

| | |
|--|------------|
| CIRCUIT DESCRIPTION | 3 |
| DESCRIPTION OF COMPONENTS | 45 |
| SEMICONDUCTOR DATA | 53 |
| PARTS LIST | 58 |
| EXPLODED VIEW | 81 |
| PACKING | 88 |
| ADJUSTMENT | 89 |
| TERMINAL FUNCTION | 104 |
| CIRCUIT DIAGRAMS / PC BOARD VIEWS | |
| LCD ASSY (B38-0736-05) | 110 |
| RF UNIT (X44-3210-00) (A/9) : RF | 113 |
| RF UNIT (X44-3210-00) (B/9) : PLL | 117 |
| RF UNIT (X44-3210-00) (C/9) | 127 |
| VCO2 (X58-3390-03) | 127 |
| FINAL UNIT (X45-351X-XX) (A/5) : FINAL | 128 |
| FINAL UNIT (X45-351X-XX) (B/5) : FILTER | 130 |
| FINAL UNIT (X45-351X-XX) (D/5) : AVR | 132 |
| FINAL UNIT (X45-351X-XX) (E/5) : RELAY | 132 |
| AT UNIT (X53-3340-02) (A/2) | 137 |
| AT UNIT (X53-3340-02) (B/2) | 139 |
| CONTROL UNIT (X53-356X-XX) (A/4) : CONTROL | 143 |
| CONTROL UNIT (X53-356X-XX) (B/4) : SW | 147 |
| TX-RX UNIT (X57-4620-00) | 155 |
| RF UNIT (X44-3210-00) (D/9) | 169 |
| RF UNIT (X44-3210-00) (E/9) | 169 |
| RF UNIT (X44-3210-00) (F/9) | 170 |
| RF UNIT (X44-3210-00) (G/9) | 170 |
| RF UNIT (X44-3210-00) (H/9) | 171 |
| RF UNIT (X44-3210-00) (I/9) | 171 |
| FINAL UNIT (X45-351X-XX) (C/5) : CONNECTION | 172 |
| CONTROL UNIT (X53-356X-XX) (D/4) : MIC | 174 |
| SCHEMATIC DIAGRAM | 175 |
| BLOCK DIAGRAM | 179 |
| LEVEL DIAGRAM | 183 |
| DRU-3 (DIGITAL RECORDING UNIT) | 185 |
| PG-2Z (DC CABLE) | 188 |
| SPECIFICATIONS | 189 |

TS-870S

CIRCUIT DESCRIPTION

Frequency Configuration

The TS-870S is quadruple conversion in receive mode. As a transmitter, it is quadruple conversion in non-FM modes and double conversion in FM mode.

The fourth 11.3kHz IF signal is converted from analog to digital, connected to the DSP in receive mode, and decoded. In transmit mode, the microphone input

signal is converted from analog to digital and applied to the DSP. It is converted from digital to analog, passed through a mixer, and becomes the 455kHz TIF signal. In FM mode, however, only 455kHz carriers are output from the DSP.

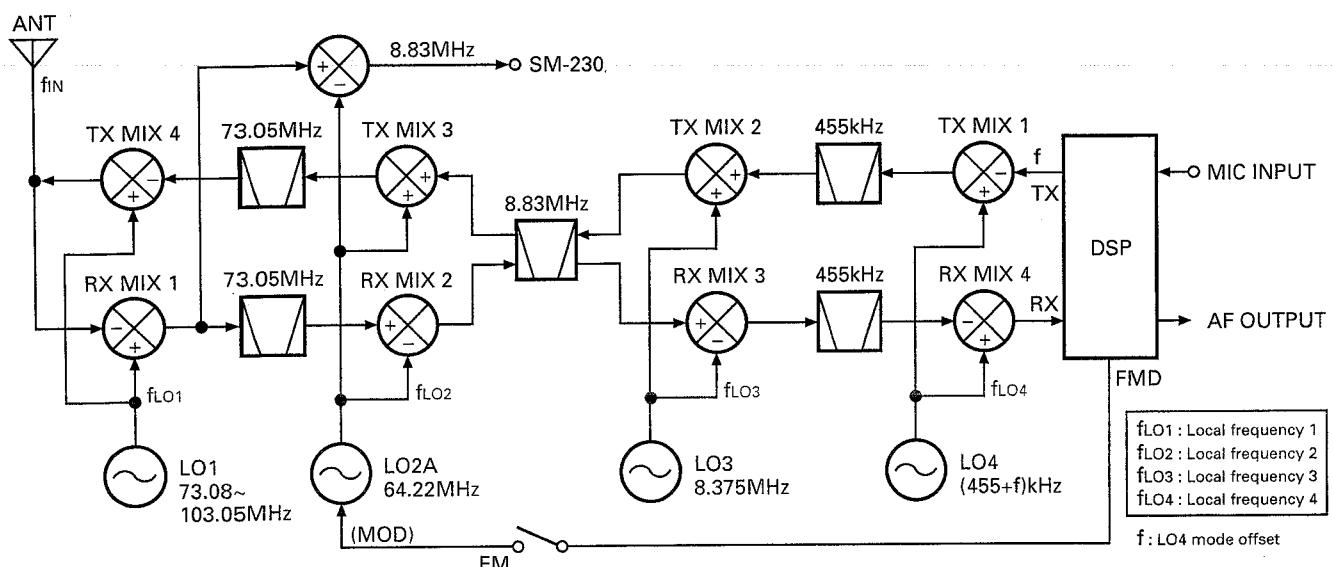


Fig. 1 Frequency configuration

■ Frequency configuration

When the receiver frequency by f_{IN} from the antenna in SSB mode is zero beat (namely, at zero to the SSB signal with a carrier point of f_{IN}), the relationship between these signals is expressed by the following equation.

$$f_{IN} = f_{LO1} - f_{LO2} - f_{LO3} - f_{LO4} + f \dots (1)$$

Since all these frequencies are generated by the PLL or DDS circuits as shown in the PLL block diagram in Figure 2, the receiver frequency is determined only by the reference frequency f_{STD} , the PLL dividing ratio and DDS data. Therefore, the reference frequency accuracy equals the operating frequency accuracy.

The accuracy of the reference oscillator used in the TS-870S is 10ppm (-10 to +50°C). If the temperature-compensated crystal oscillator (TCXO) SO-2 is used, the accuracy becomes 0.5ppm (-10 to +50°C).

The TS-870S local oscillator and CAR DDS are independent of each other. However, they can be operated like a cancel loop configuration by changing the CAR and local oscillator PLL data simultaneously via a microprocessor. This function allows a shift (f_{LO1} , f_{LO3} , f_{LO4}) by the mode change to be performed and the band width of the slope tune to be varied (f_{LO1} , f_{LO3} , f_{LO4}).

When used as a transmitter in SSB mode or in other modes, likewise the frequency is determined by the reference frequency f_{STD} and dividing ratio. The display frequencies in the modes are listed in Table 1. In the FSK mode, the TS-870S displays the mark transmitter frequency.

TS-870S

CIRCUIT DESCRIPTION

In CW mode, the TS-870S receiving pitch can be changed to the required frequency in 50Hz steps with the desired signal remaining in the center of the IF filter band-pass (Variable CW pitch system). Since the receiving pitch varies along with the transmitter side tone, it is possible to zero-beat by receiving the desired signal at the same pitch as the side tone.

FM transmission is obtained in this system by modulating the f_{LO2} via application of the audio signal from the microphone to the VCO2.

| Mode | Display frequency |
|----------|--------------------------------|
| USB, LSB | Carrier point frequency |
| CW | Transmission carrier frequency |
| FSK | Mark transmitter frequency |
| AM, FM | IF filter center frequency |

Table 1 Display frequency in each mode

PLL Circuit

The TS-870S PLL circuit consists of a PLL loop that includes DDS covering a frequency range between 30kHz to 30MHz in 10Hz or 1Hz steps in accordance with the 20kHz reference frequency; DDS that generates other local oscillators (LO3, LO4); and a PLL loop that produces LO2A.

The dividing ratio data to each PLL loop and the DDS data are controlled by a microprocessor. Each loop is controlled by a single crystal frequency control system according to the reference frequency f_{STD}. (See the PLL block diagram in Figure 2.)

■ Reference signal generation circuit

The reference frequency f_{STD} used for frequency control is determined by the 20MHz crystal oscillator (X800 and Q800 : 2SC2714). One reference frequency is output as the reference signal f_{REF} for the PLL and DDS in the PLL section. The other is sent to the TX-RX unit and used as the PLL reference signal for the PLL and DSP.

The crystal oscillator may be replaced by an optional TCXO (SO-2), and the TCXO may be switched to with slide switch S800.

If the optional TCXO (SO-2) is installed, the S800 switch must be set to the SO-2 position.

■ LO2 (PLL section)

Q1 : 2SK508NV in VCO2 (A501 : X58-3390-03) generates 64.22MHz. The 20MHz reference frequency f_{REF} is applied to pin 15 of IC509 : MB86001PF, and is divided internally by a factor of 1000 (4000 in FM mode) to produce a 20kHz (5kHz in FM mode) comparison frequency.

The VCO2 output is applied to pin 6 of IC509 : MB86001PF, and is internally divided by a factor of 3211 (12844 in FM mode). It is compared with the 20kHz (5kHz in FM mode) signal using the phase comparator. The VCO2 frequency is locked. The division ratio is transmitted from the control unit.

The output from PLL2 is passed through buffer Q539, amplified by amplifier Q532, passed through a low-pass filter, its impedance is converted, and is then output to the RF section as LO2A.

■ LO1 (PLL loop)

Four VCOs and uses Q520 to Q523 : 2SK508NV x 4 to generate 73.08MHz to 103.05MHz. The 20MHz reference frequency f_{REF} is applied to pin 15 of PLL IC IC507 : MB86001PF, and is internally divided by a factor of 20 to produce a 1MHz comparison frequency. The output is passed through amplifier Q524, and a band-pass filter. One output is passed through buffer Q526 : 2SC2996 and a low-pass filter and goes to the RF section.

The other output signal is passed through buffer Q525 : 2SC2714 and applied to pin 5 of mixer IC508 : SN76514. A signal of 54.54 to 55.54MHz is input to pin 11 of IC508 and converted to a signal of 18.0 to 48.0MHz. This signal is output from pin 13. The signal is passed through a high-pass filter, a low-pass filter, and amplifier Q531 : 2SC2714 and Q530 : 2SC2712, and goes to pin 6 of PLL IC IC507 : MB86001PF.

This signal is internally divided by N, and compared with the 1MHz signal using the phase comparator. The mixer output frequency is locked in 1MHz steps. The division ratio N is transmitted from the control unit as data (N : 18 to 48) corresponding to 0MHz to 30MHz in 1MHz steps. One of the four VCOs is selected according to the VCO change signal (VB0 to VB3) sent from the control unit.

TS-870S

CIRCUIT DESCRIPTION

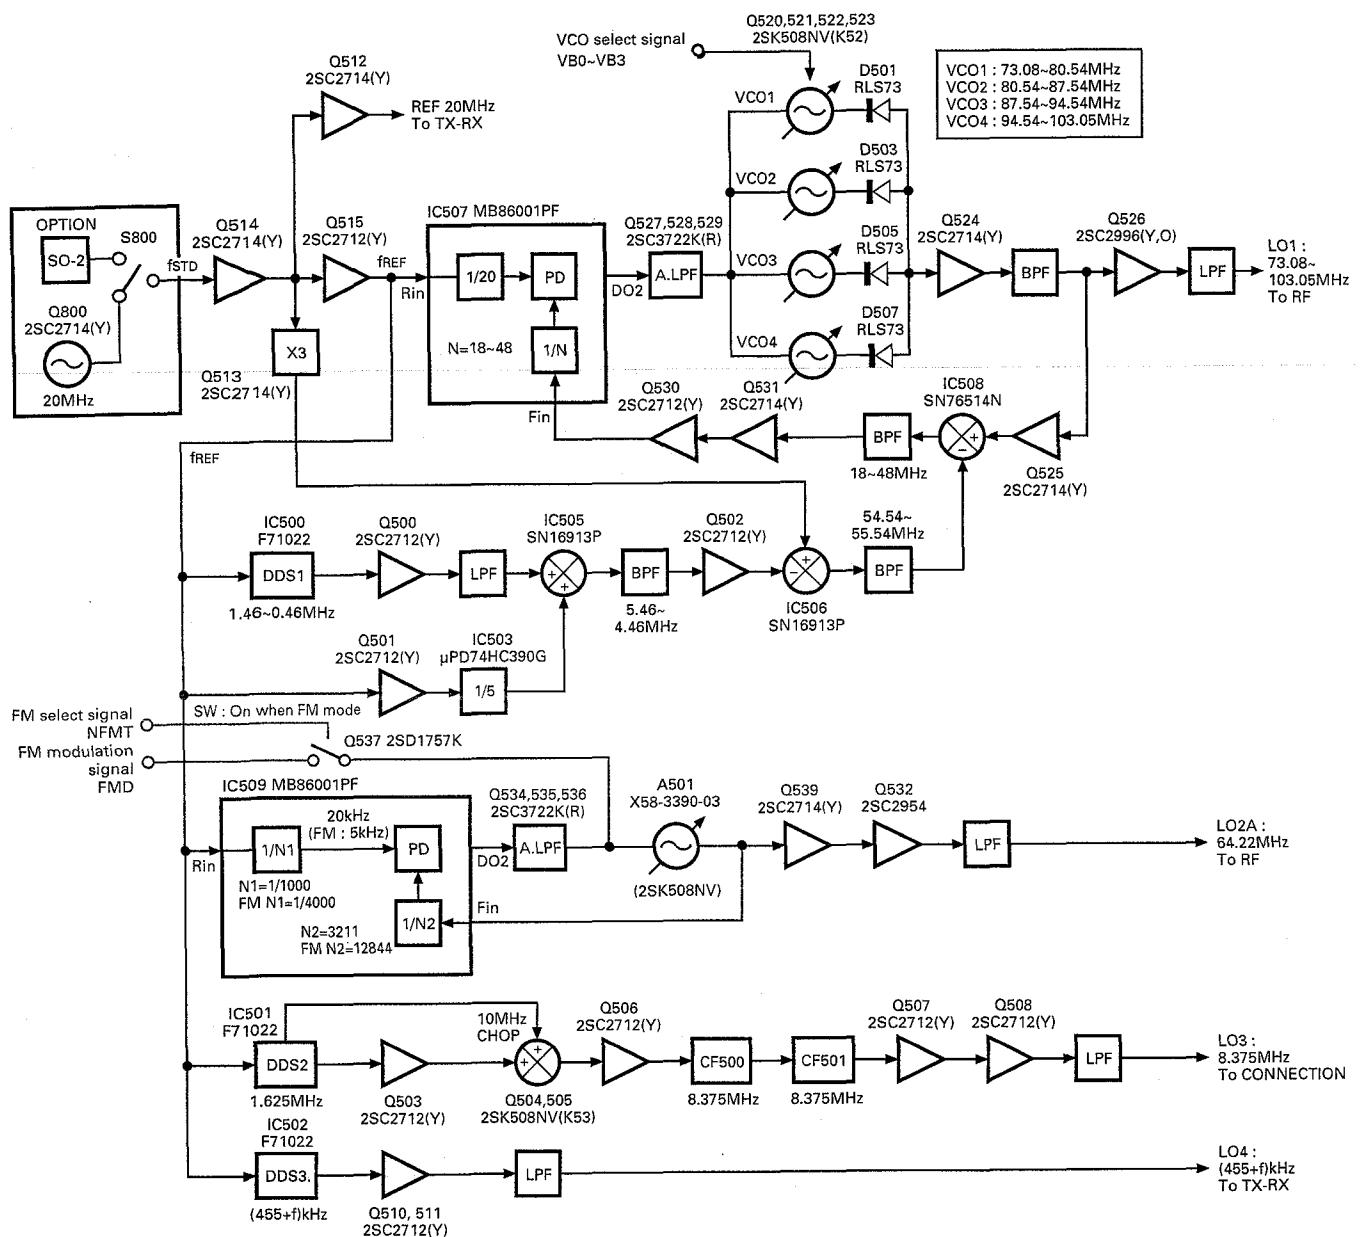


Fig. 2 PLL block diagram

TS-870S

CIRCUIT DESCRIPTION

DDS1 (IC500 : F71022) generates 1.46 to 0.46MHz digital signals. They are converted to analog signals by a digital to analog converter (consisting of CP500, CP501, and Q500), passed through a low-pass filter, and fed to pin 5 of mixer IC505 : SN16913P. The 4MHz signal produced by division of 20MHz reference frequency fREF by divider IC503 : UPD74HC390G by a factor of 5 is input to pin 2 of the mixer IC505, and a 5.46 to 4.46MHz signal is output from pin 1. The output signal is passed through a band-pass filter and buffer Q502, and input to pin 5 of mixer IC506 : SN16913P. The 60MHz signal obtained by tripling 20MHz reference frequency fREF via multiplying circuit Q515 is mixed, and a 54.54 to 55.54MHz signal is output. This signal is passed through a band-pass filter, and goes to pin 13 of mixer IC508.

DDS1 sweeps the 1.46 to 0.46MHz digital signal output in 10 or 1Hz steps, and LO1 covers the 73.08 to 103.05MHz signal in 10 or 1Hz steps and is output to the RF section.

■ LO3 generation

DDS2 (IC501 : F71022) generates a digital signal of the 1.625MHz basic frequency. It is converted to an analog signal by a digital-to-analog converter (consisting of CP502, CP503, and Q503), and chopped by a circuit consisting of Q503 to Q505 so as to extract an 8.375MHz primary harmonic component. Unwanted components are removed by a ceramic filter consisting of CF500 and CF501. The resulting signal is passed through amplifier Q507, buffer Q508, and a low-pass filter, and output to the connection section (final unit) as the LO3 signal.

■ LO4 generation

DDS3 (IC502 : F71022) generates a (455+f) kHz digital signal. It is converted to an analog signal by a digital to analog converter (consisting of CP504, CP505, and Q510), passed through buffer Q511 and a low-pass filter, and output to the TX-RX unit as the LO4 signal.

The LO4 signal is a local oscillator signal used to generate a DSP processing signal f from 455kHz. The f frequency is described in the local signal section (page 14).

■ Subtone generation

During FM transmission, the DSP generates a signal to which a subtone is added and is then sent to the main unit as it is.

■ PLL data

The TS-870S has three PLLs to which the main CPU sends PLL data based on the displayed frequency.

- PLL comprising a VFO (PLL section)
- Local oscillator PLL for frequency conversion (PLL section)
- PLL that generates timing clocks for digital signal processing (TX-RX unit)

The VCOs change with the following conditions.

- Main encoder change → VCO1 (PLL section)
- Mode change → VCO2 (PLL section)

Each PLL IC outputs an unlock signal. If any PLL is unlocked, the main display indicates "....." (dots). If the unlocked PLL is the TX-RX unit, the sub-display shows "Err-FD", and if it is the PLL unit, it shows "Err-FE" to indicate that it is unlocked.

The unlocking of each PLL is output to pin 11 (UL) of PLL IC : MB86001PF as unlock data (UNLOCK : LOW).

| Loop | VCO No. | IC No. | Comparison frequency/divide ratio | Variable divide ratio | Frequency (MHz) |
|------|---------|--------|-----------------------------------|-----------------------|-----------------|
| LO1 | VCO1 | IC507 | 1MHz/20 | 18~48 | 73.08~103.05 |
| LO2 | VCO2 | IC509 | 20kHz/1000 5kHz/4000 : FM | 3211 12844 : FM | 64.22 |

CIRCUIT DESCRIPTION

■ DDS circuit configuration

The DDS IC has been developed with standard cells to implement a high-speed operation circuit and large-capacity ROM at a low cost.

1) IC configuration

The IC consists of the following components:

Two 28 bit registers for setting frequency data, one 28 bit frequency shift register for addition to the frequency register, a 23 bit parallel signal input section for frequency modulation with a parallel signal, and a data entry and selection section.

Frequency modulation section comprised of a 28 bit adder that adds frequency data and frequency modulation data

Phase data operation section that adds data from the frequency modulation section with the 28 bit phase data register

SIN-ROM that converts phase data to sine data.

2) Frequency/shift data setting

Using serial signals synchronized with clock pulses, a total of 30 bits (2 bits that specify the destination to which data are set and 28 bits for frequency data) are set in three internal registers.

3) Frequency register selection

The data set in the two frequency registers are selected by the SLAB input of the DDS IC. This pin handles the TXC signal. This function eliminates the need for the TS-870S microprocessor to set frequency data for each transmission and reception.

4) Frequency data selection

The SPSL input of the DDS IC selects whether to use the data in the internal frequency shift register or the data from parallel input as frequency modulation data.

5) Frequency modulation

The MDEN input of the DDS IC enables or disables frequency modulation. When frequency modulation is enabled, frequency data is added, and the result is input to the phase data operation section.

6) Phase data operation

The target frequency phase data is output by accumulating 28 bit frequency data in the 28 bit phase accumulator.

$$F_{out} = F_s/2^{28} \cdot D_{sum}$$

F_s : DDS IC input frequency/2


D_{sum} : Frequency data+Frequency modulation data

If 2^{25} is set for D_{sum} when $1/8 F_s$ is output, the phase data must be increased by $\pi/8$.

A 28 bit absolute value operation has been used here, but a 28 bit signed operation can also be used, assuming that the MSB is a sign. If complement data of 8000000 to FFFFFFFF (hex) is set, the phase moves in the negative direction for the positive data.

7) SIN-ROM

Phase data from the phase data operation section is converted to sine data of 0000 to FFFF (hex) in the 16 bit offset binary format.

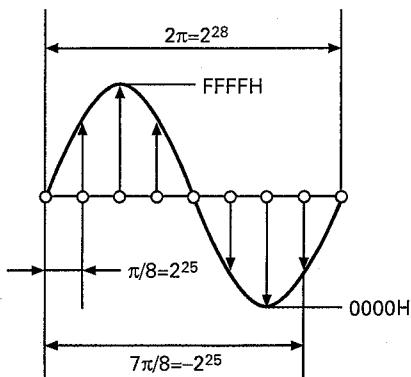

TS-870S

CIRCUIT DESCRIPTION

Receiver Circuit

The basic configuration of the receiver circuit is quadruple conversion. After the frequency is converted to the 11.3kHz fourth IF, the DSP carries out AGC, filtering, detection, and signal processing. Figure 3 is a receiver block diagram.

The signal coming from the antenna connector is passed through the antenna switching relay (K301) in the final unit (E/5 relay section), the antenna tuner unit, and the transmit/receive changeover relay (K302) within the relay section, and then goes to the CN2 (RAT) of the RF unit (A/9 RF section).

The signal input to the RF unit is passed through protection lamp PL1 for strong signal input, external receiver power distribution circuit L1 and L2 and switching circuit K1, and is input to the ATT (-6dB, -12dB) circuit. This distribution circuit is switched when the EXT RX (function that distributes the signals from the antenna to the external receiver), which is set from menu No.53, is turned ON. When this function is ON, the signal from the antenna is attenuated by about 4dB and output to the receiver section in the subsequent stage and the EXT RX terminal on the rear. The signal to the EXT RX terminal is passed through lamp PL2 for protection during transmission. The lamp turns OFF when about 10W is input.

The signal is passed through the ATT switching circuit, then goes to the BC band attenuation circuit (L7 to L9, C19 to C22). The BC band signal is attenuated by 5 to 10dB to prevent power saturation of the band-pass filter switching diode resulting from interference from a proximate station. The band-pass filter consists of two low-pass filters and 10 band-pass filters, and passes signals during transmission. The pin diode (1SV128) is used to change the input to raise the signal saturation level when a HIGH signal is input.

The RF amplifier circuit functions as a low-gain amplifier using Q14 and Q15 : 2SK2218(5) x 2 when the frequency is 21.49MHz or lower, and it functions as a high-gain amplifier using Q13 : 3SK131(M) when the frequency is higher than 21.49MHz. It is bypassed when AIP is ON.

The 73.05MHz first IF signal is generated by quad mixer Q17 to Q20 : 2SK520(K44) x 4. It is passed through XF1 73.05MHz MCF, Q24 : 3SK131(M) first mixer amplifier, and Q26 and Q27 : 2SK520(K43) mixer to produce a 8.83MHz second IF signal. The second IF signal is divided into two signals, one of which is branched to the noise blower, amplified by amplifier Q28, and then goes to the NB circuit. The other signal is input to the second IF signal amplifier, and serves as a blanking gate by the NB and RBK signals. The amplified second IF signal is passed through the 8.83MHz IF filter, and output to the final unit (C/5 connection section) from CN10. This signal is switched with the diode switch D62 and D68, and functions as a second IF signal output during reception and a third IF signal input during transmission.

The second IF signal input to CN412 in the final unit (C/5 connection section) is routed to the receiver circuit by D450, and input to the mixer Q460 and Q461 to generate a 455kHz third IF signal. It is passed through the 455kHz IF filter, amplified by third IF amplifier Q475, and output by CN411 to the TX-RX unit as RIF signal. The total gain of the receiver unit is adjusted by VR1 in the TX-RX unit.

TS-870S TS-870S

CIRCUIT DESCRIPTION

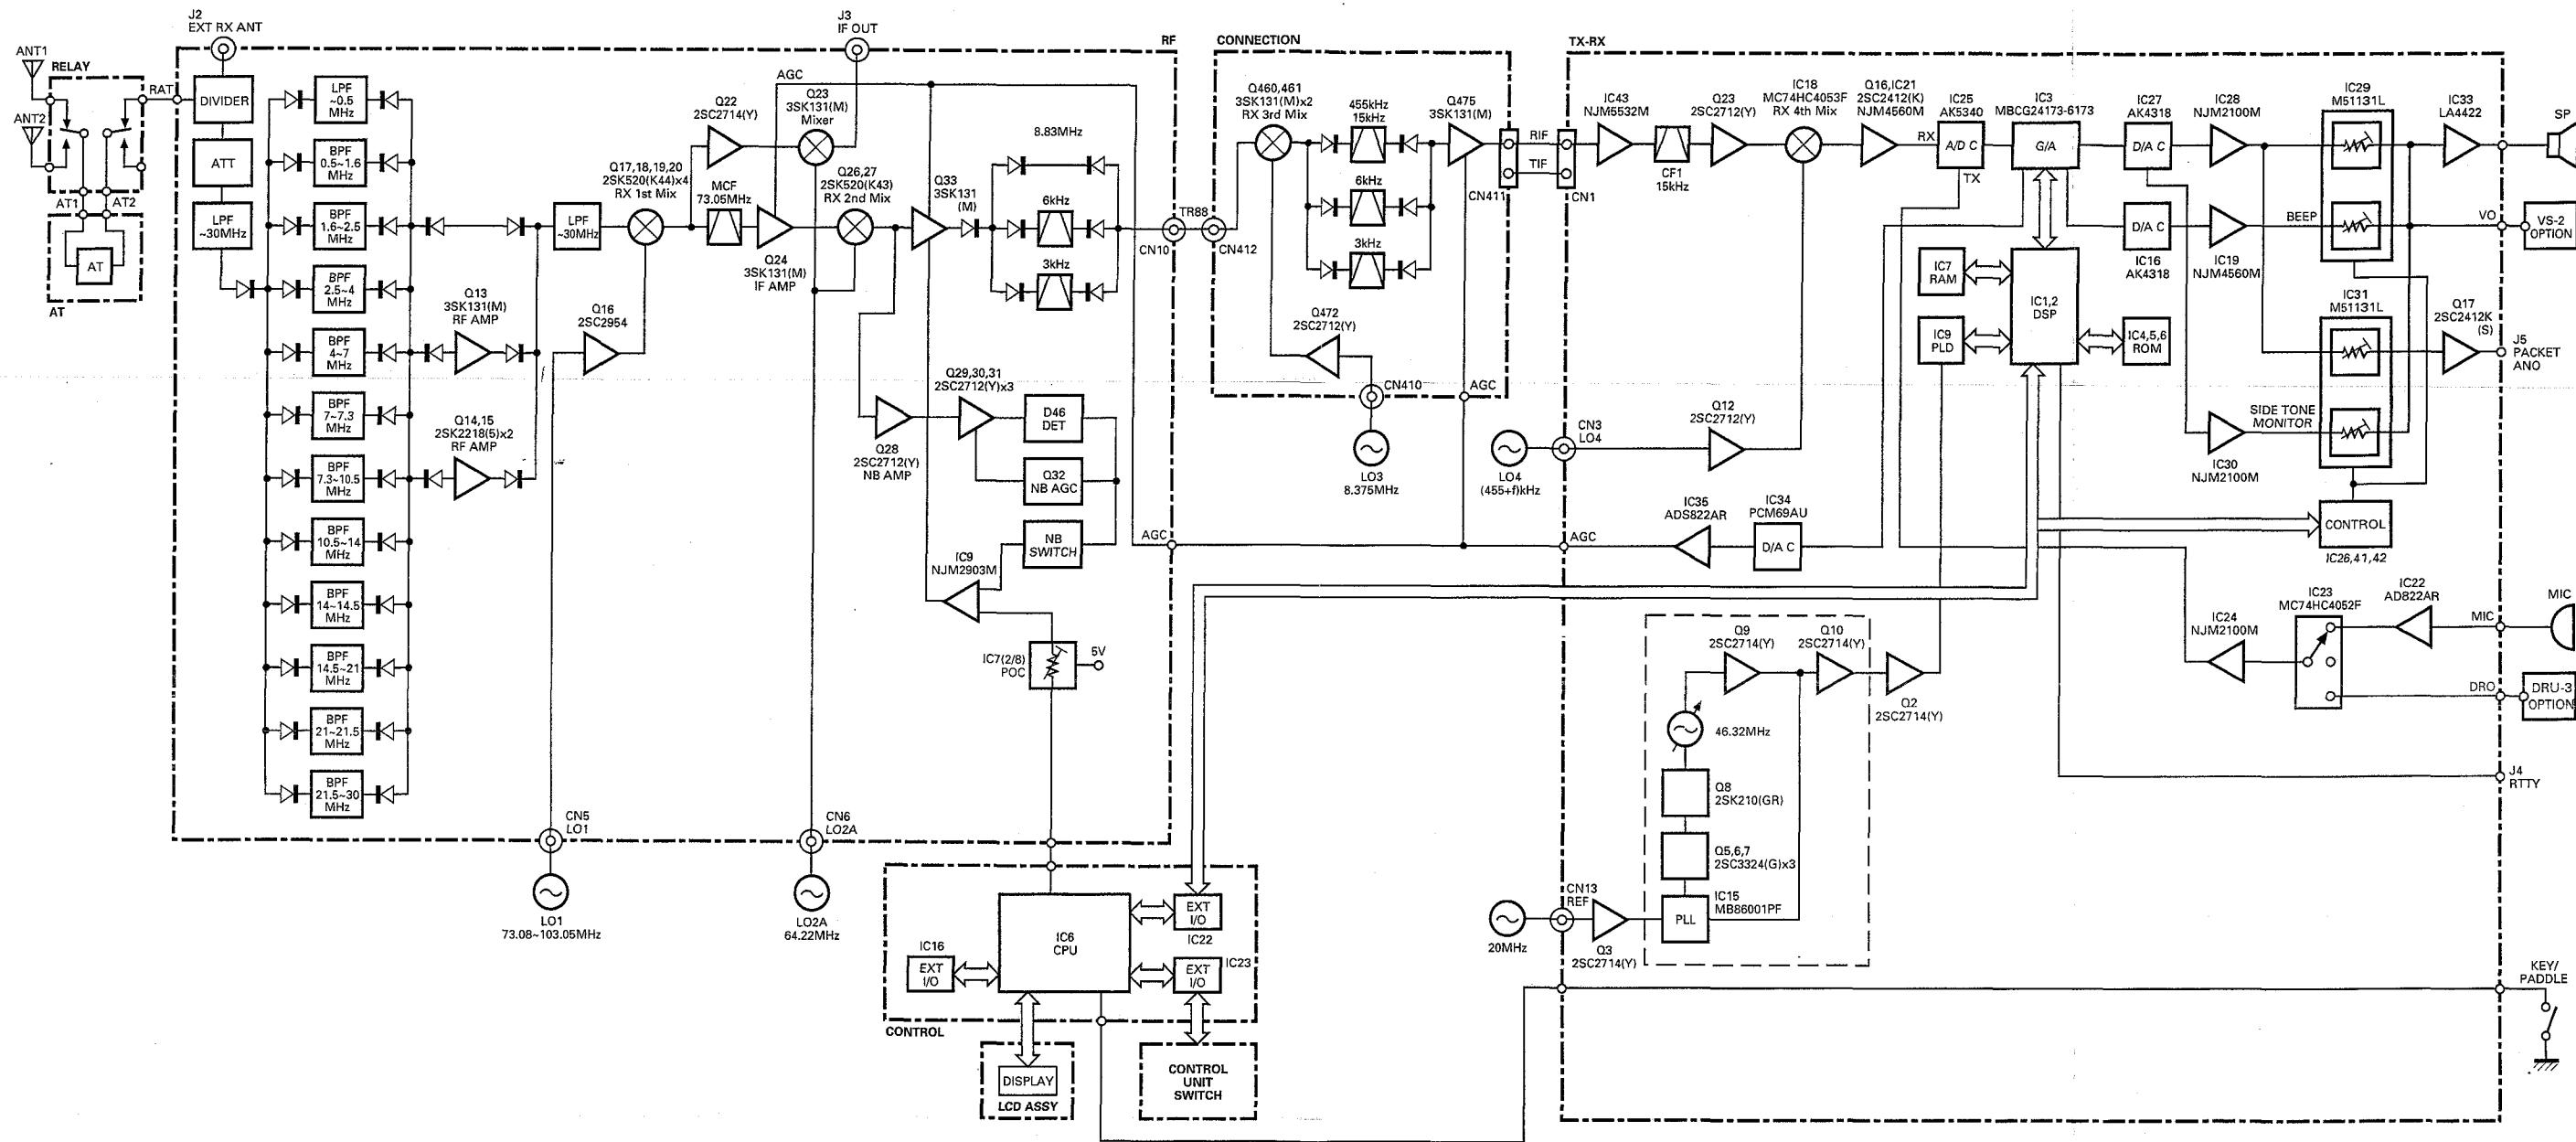


Fig. 3 Receiver block diagram

TS-870S CIRCUIT DESCRIPTION

■ IF filter

The IF filter consists of a DSP digital filter. If there is a HIGH signal outside the DSP filter band, the analog to digital converter input level may be saturated, and the filter does not work properly. Thus, an analog filter is inserted between the second IF (8.83MHz) and the third IF (455kHz) so that it does not impair the DSP filter properties. To operate each filter properly, there are three kinds of filters for each IF signal and also slope tuning is carried out.

1) Filters characteristics

| Item | Rating |
|----------------------------|--|
| Nominal center frequency | 73.05MHz |
| Pass bandwidth | $\pm 7.5\text{kHz}$ or more at 3dB |
| Attenuation bandwidth | $\pm 30\text{kHz}$ or less at 40dB |
| Ripple | 1.0dB or less |
| Insertion loss | 3.0dB or less |
| Guaranteed attenuation | 70dB or more at $f_0 + (500 \text{ to } 1000\text{kHz})$ 70dB or more at $f_0 - (200 \text{ to } 1000\text{kHz})$ |
| Center frequency deviation | Within $\pm 1.5\text{kHz}$ at 3dB |
| Terminating impedance | $2\text{k}\Omega \pm 10\%$ |

MCF (L71-0401-05) : RF unit XF1

| Item | Rating |
|----------------------------|--|
| Nominal center frequency | 8830kHz |
| Center frequency deviation | Within $\pm 150\text{Hz}$ at 6dB |
| Pass bandwidth | $\pm 1.5\text{kHz}$ or more at 6dB |
| Attenuation bandwidth | $\pm 1.9\text{kHz}$ or less at 20dB $\pm 2.75\text{kHz}$ or less at 60dB $\pm 3.5\text{kHz}$ or less at 80dB |
| Ripple | 2dB or less |
| Insertion loss | 6dB or less |
| Guaranteed attenuation | 80dB or more in the range $\pm 3.5\text{kHz}$ to $\pm 1\text{MHz}$ |
| Terminating impedance | $600\Omega / 15\text{pF}$ |

MCF (L71-0235-05) : RF unit XF2

| Item | Rating |
|--------------------------|--|
| Nominal center frequency | 8830kHz |
| Pass bandwidth | $\pm 3.0\text{kHz}$ or more at 6dB |
| Attenuation bandwidth | $\pm 16.0\text{kHz}$ or less at 60dB $\pm 13.0\text{kHz}$ or less at 50dB |
| Guaranteed attenuation | 70dB or more with in $f_0 \pm 1\text{MHz}$ (Without spurious in the range f_0 to $f_0 + 500\text{kHz}$) |
| Ripple | Within 1.0dB |
| Insertion loss | Within 1.5dB |
| Terminating impedance | $1850\Omega / 2\text{pF}$ |

MCF (L71-0266-05) : RF unit XF3

TS-870S

TS-870S

CIRCUIT DESCRIPTION

■ IF gain correction

The total gain changes when the AIP is turned ON or OFF or the band is 21.49MHz or higher. To limit the changes, the DSP corrects the IF gain. Table 2 lists the corrections. When the "AIP S-meter correction" on menu No.11 is turned ON, the S-meter is corrected when the AIP is turned ON. And since the IF gain is corrected greatly, the receiver internal noise output becomes large.

| Frequency | Correction (dB) | | | Pre-amp gain (dB) reference | |
|--------------------|-----------------|----------------------|--|-----------------------------------|--|
| | AIP | | | | |
| | OFF | ON1 (Menu 11 OFF) | ON2 (Menu 11 ON) SSB, CW, FSK only | | |
| 30kHz~ 21.49MHz | -2 | 0 | +12 | 15 | |
| 21.49MHz~ 30MHz | -7 | 0 | +12 | 21 | |

Table 2 IF gain corrections

■ NB circuit

The noise blanker, like the conventional one, branches the signal before the narrow-band filter of the 8.83MHz second IF, and detects noise, and performs blanking using the second IF amplifier as a gate. The signal is amplified by Q28, detected by the AGC amplification and noise detection circuit consisting of Q29 to Q32 and D46, and then a blanking pulse is generated by the IC9 comparator. The noise detection circuit Q29 to Q32 and D46 is separated into segments by a jumper in the unit to prevent sneak path.

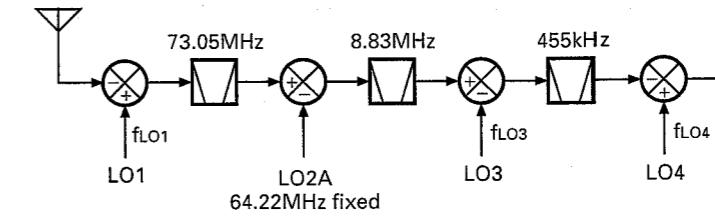
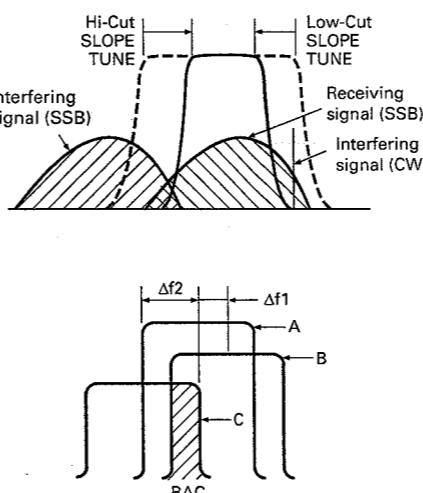


Fig. 4 SSB slope tune operating principle

■ Slope tune

The operating principle of SSB-SLOPE-TUNE is explained first. When fLO1, fLO3, and fLO4 in Figure 4 are at their normal frequencies, the synthesized bandwidth is indicated by A. If the fLO1 frequency is increased by Δf_1 and the fLO3 frequency is decreased by Δf_1 , the filter of the 8.83MHz band shifts to position B. The synthesized bandwidth is indicated by the section overlapped by A and B. When the frequencies of fLO1 and fLO3 are lowered by Δf_2 , only the 455kHz second IF filter shifts to position C. The synthesized bandwidth is indicated by the section overlapped by B and C.

Therefore, high frequencies are cut off by increasing the fLO1 frequency and decreasing the fLO3 frequency. Low frequencies are cut off by decreasing the fLO3 and fLO4 frequencies. The TS-870S enables these operations using the DSP filter.

In SSB mode, slope tune high cut/low cut is switched by using the filter select control : in CW mode, the WIDTH (bandwidth)/SHIFT (center frequency) is changed, and in FSK mode, the WIDTH (bandwidth) is changed. The microcomputer in the control unit sends filter select data to the DSP, and slope tuning is carried out by changing frequency data given to the PLL and DDS. The second IF (8.83MHz) and third IF (455kHz) filters are selected to carry out slope tuning effectively. Tables 3 and 4 list filter selections, slope tuning and analog filter high cut/low cut amounts. Slope tuning low cut/high cut can be switched in AM mode, and the WIDTH can be switched in FM mode by using DSP filters only, and the analog filter is fixed to 15kHz.

TS-870S

CIRCUIT DESCRIPTION

← High cut position

Filter selection

- 3kHz filter
- 6kHz filter
- 15kHz filter
- Default

Low cut position

(455kHz filter) Low cut amount

(8.83MHz filter) High cut amount

High cut position

Table 3 SSB slop tuning and analog filter high/low cut (Hz)

← Filter center position

Default

Filter width

Filter center position

Table 4-1 CW WIDTH/SHIFT low cut amount (Hz)

← Filter center position

Default

Filter width

Filter center position

Table 4-2 CW WIDTH/SHIFT high cut amount (Hz)

TS-870S

CIRCUIT DESCRIPTION

■ Local signals (LO1, LO3, LO4)

1) LO1

Table 5 lists LO1 frequency configuration.

DDS1 varies from 0.46 to 1.46MHz, and when the display frequency is multiple MHz (for example, 14.000MHz), 0.96MHz is output. When the display frequency is increased, the DDS1 frequency is reduced by the amount of change. When the DDS1 frequency is reduced to 0.46MHz, the frequency is switched to 1.46MHz, and when it is increased to 1MHz, the frequency returns to 0.96MHz (Figure 5). By changing the 1MHz band in synchronization with the display frequency, the 1MHz comparison PLL circuit is locked and LO1 is generated.

In Table 5, the 0.96MHz base indicates the DDS output when the frequency is multiple MHz. The frequency (UNV) indicates the decimal digits of the MHz frequency. (If the display frequency is 14.2MHz, (UNV) = 0.2MHz.) DDS is switched by 500kHz, so $-0.5\text{MHz} \leq (\text{UNV}) < 0.5\text{MHz}$.

As described in the slope tuning section, slope tuning high-cutting is corrected for LO1, so the correction is added to the DDS output. SSB H in Table 5 indicates the correction. Table 3 shows the actual correction of SSB H. (For example, when the high frequency is 2.2kHz, the correction SSB H is 0.2kHz.)

Since RIT and XIT change the receive and transmit frequencies by the preset amount, it needs to be corrected. They are D RIT and D XIT in Table 5.

The "8.83MHz window-joining" (D 883) in Table 5 is determined during adjustment. For example, the equation for calculating the DDS output frequency for 14.2MHz USB. The high-cut frequency is assumed to be 2.6kHz. (D 833 is zero.)

$$\begin{aligned}\text{DDS1 : } & 0.96\text{M} - (\text{UNV}) - (\text{OFS SSB}) + (\text{SSB H}) \\ & = 0.96\text{M} - 0.2\text{M} - 1.2\text{k} - 0.2\text{k} \\ & = 758.6\text{kHz} \\ & 0.96\text{M} : \text{Base} \\ & \text{UNV} : 14.2\text{M} - 14.0\text{M} = 0.2\text{M} \\ & \text{OFS SSB (Filter offset)} : 1.2\text{k} \\ & \text{SSB H (Slope HI)} : -0.2\text{k} \text{ (See table 3.)}\end{aligned}$$

The LO1 output frequency f_{LO1} is calculated from the frequency configuration in Figure 6.

$$\begin{aligned}f_{\text{LO1}} &= f_{\text{PLL IN}} + 60\text{MHz} - (4\text{MHz} + \text{fDDS1}) \\ &= 32\text{MHz} + 60\text{MHz} - (4\text{MHz} + 758.6\text{kHz}) \\ &= 87.2414\text{MHz}\end{aligned}$$

Where $f_{\text{PLL IN}}$ is the PLL input frequency and fDDS1 is the DDS1 output frequency.

DDS1 output (MHz)

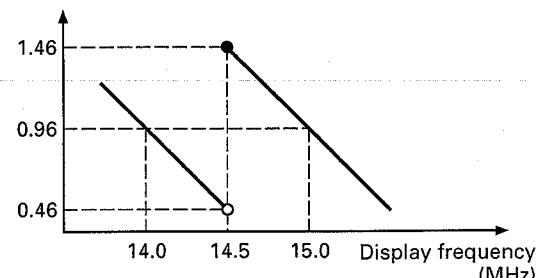


Fig. 5 Relationship between display frequency and DDS output frequency

2) LO3

Table 6 lists the LO3 frequency configuration.

The LO3 frequency is 8.375MHz, and is generated by the chopper circuit. The DDS2 output frequency is 1.625MHz. For LO3, slope tuning low-cut/high-cut is corrected. SSB H and SSB L in Table 6 indicate the corrections. D 833 and D 455 are values determined during filter window-joining and adjustment.

For example, if USB is 14.2MHz, high-cut frequency is 2.6kHz, and low-cut frequency is 300Hz, the LO3 frequency is calculated as follows. It is assumed that D 833 and D 455 are zero.

$$\begin{aligned}f_{\text{LO3}} &= 1.625\text{MHz} + (\text{SSB H}) + (\text{SSB L}) \\ &= 1.625\text{MHz} + (-0.2\text{kHz}) + 300\text{Hz} \\ &= 1625.1\text{kHz}\end{aligned}$$

CIRCUIT DESCRIPTION

3) LO4

Table 7 lists the LO4 frequency configuration.

For LO4, correction (OFS SSB) is carried out so that a signal passes through a filter according to the mode, and the slope tune low-cut (SSB L) is corrected. The mode offset is the frequency (11.30859375kHz) used for processing by the DSP, and its sign changes with the mode.

For example, if USB is 14.2MHz and the low-cut frequency is 300Hz, the LO4 output frequency is calculated as follows.

$$\begin{aligned} f_{LO4} &= 455\text{kHz} + (\text{mode offset}) + (\text{OFS SSB}) + (\text{SSB L}) \\ &= 455\text{kHz} + 11.30859375\text{kHz} + 300\text{Hz} \\ &= 467.8085938\text{kHz} \end{aligned}$$

The filter is corrected according to each mode by LO1 and LO4, slope tuning high-cut is corrected by LO1 and LO3, and low-cut is corrected by LO3 and LO4.

In other modes, each local frequency is determined by the calculation method as shown previously in Tables 5 to 7.

| Component | DDS1 (1HZ) | | | | | | | | | | | | | | | |
|--|-----------------------|-----------|-------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| | LSB | | USB | | CW | | CW-R | | FSK | | FSK-R | | AM | | FM | |
| | RX | TX | RX | TX | RX | TX | RX | TX | RX | TX | RX | TX | RX | TX | RX | TX |
| BASE | 0.96MHz ^{*6} | | | | | | | | | | | | | | | |
| Frequency (100kHz or less) | - (UNV) | | | | | | | | | | | | | | | |
| Mode offset | | | | | | | | | | | | | | | | |
| Filter offset ^{*1} | + (OFS SSB) | + 2k | - (OFS SSB) | - 2k | - 800 | | + 800 | | | | | | | | | |
| CW pitch | | | | | + (PITCH) | | - (PITCH) | | | | | | | | | |
| FSK tone (H/L) | | | | | | | | | | | | | | | | |
| FSK shift (polarity) | | | | | | | | | | | | | | | | |
| RIT | - (D RIT) | | - (D RIT) | | - (D RIT) | | - (D RIT) | | - (D RIT) | | - (D RIT) | | - (D RIT) | | - (D RIT) | |
| XIT | | - (D RIT) | | - (D RIT) | | - (D RIT) | | - (D RIT) | | - (D RIT) | | - (D RIT) | | - (D RIT) | | - (D RIT) |
| Slope high ^{*2,3} | - (SSB H) | | + (SSB H) | | + (CW H) | | - (CW H) | | - (FSK H) | | + (FSK H) | | | | | |
| Slope low | | | | | | | | | | | | | | | | |
| 8.83MHz window-joining ^{*4,5} | - (D 883) | | + (D 883) | | | | | | | | | | | | | |
| 455kHz window-joining | | | | | | | | | | | | | | | | |

*1 : Although receiver data has an independent value for each mode, the data area for calculation is D_OFFSET.

Transmitter data is fixed because the 8.83MHz filter bandwidth is fixed.

*2 : Although it has an independent value for each mode, the data area for calculation is D_SLOP_L.

*3 : The slope low-cut is carried out at 455kHz and high-cut is carried out at 8.83MHz.

*4 : The LSB and USB may have the same value because the filter bandwidth is wide.

*5 : The positive direction for adjustment is the direction in which the receive carrier frequency increases.

*6 : The DDS1 variable frequency is 1.45MHz and is shifted by 500kHz.

Table 5 LO1 frequency configuration

TS-870S

CIRCUIT DESCRIPTION

| Component | DDS2 (LO3) | | | | | | | | | | | | | | | |
|----------------------------|------------|----|-----------|-----------|----------|----|----------|----|-----------|----|-----------|----|----|----|----|----|
| | LSB | | USB | | CW | | CW-R | | FSK | | FSK-R | | AM | | FM | |
| | RX | TX | RX | TX | RX | TX | RX | TX | RX | TX | RX | TX | RX | TX | RX | TX |
| BASE | 1.625MHz*6 | | | | | | | | | | | | | | | |
| Mode offset | | | | | | | | | | | | | | | | |
| Filter offset | | | | | | | | | | | | | | | | |
| CW pitch | | | | | | | | | | | | | | | | |
| FSK tone (H/L) | | | | | | | | | | | | | | | | |
| FSK shift (polarity) | | | | | | | | | | | | | | | | |
| RIT/XIT | | | | | | | | | | | | | | | | |
| Slope high*1,3 | - (SSB H) | | + (SSB H) | | + (CW H) | | - (CW H) | | - (FSK H) | | + (FSK H) | | | | | |
| Slope low*2,3 | - (SSB L) | | + (SSB L) | | + (CW L) | | - (CW L) | | - (FSK L) | | + (FSK L) | | | | | |
| 8.83MHz window-joining*4,5 | - (D 883) | | | + (D 883) | | | | | | | | | | | | |
| 455kHz window-joining*4,5 | + (D 455) | | | - (D 455) | | | | | | | | | | | | |

*1 : Although it has an independent value for each mode.

*2 : Although it has an independent value for each mode.

*3 : The slope low-cut is carried out at 455kHz and high-cut is carried out at 8.83MHz.

*4 : The LSB and USB may have the same value because the filter bandwidth is wide.

*5 : The positive direction for adjustment is the direction in which the receive carrier frequency increases.

*6 : Since the DDS2 output frequency is high, 1.625MHz (10MHz – output frequency (8.375MHz)) is output to the DDS.

Table 6 LO3 frequency configuration

| Component | DDS3 (LO4) | | | | | | | | | | | | | | | |
|---------------------------|--------------|-----|--------------|-----------|--------------|----|--------------|----|--------------|-----------------|--------------|-----------------|--------------|----|--------------|----|
| | LSB | | USB | | CW | | CW-R | | FSK | | FSK-R | | AM | | FM | |
| | RX | TX | RX | TX | RX | TX | RX | TX | RX | TX | RX | TX | RX | TX | RX | TX |
| BASE | 455kHz | | | | | | | | | | | | | | | |
| Mode offset (kHz) | -11.30859375 | | +11.30859375 | | +11.30859375 | | -11.30859375 | | -11.30859375 | | +11.30859375 | | +11.30859375 | | +11.30859375 | |
| Filter offset*1 | - (OFS SSB) | -2k | + (OFS SSB) | +2k | +800 | | -800 | | | | | | | | | |
| CW pitch | | | | | | | | | | | | | | | | |
| FSK tone (H/L) | | | | | | | | | | -2125 /-1275 | | +2125 /+1275 | | | | |
| FSK shift (polarity) | | | | | | | | | | | + (FSK S) | + (FSK S) | | | | |
| RIT/XIT | | | | | | | | | | | | | | | | |
| Slope high | | | | | | | | | | | | | | | | |
| Slope low*2,3 | - (SSB L) | | + (SSB L) | | + (CW L) | | - (CW L) | | - (FSK L) | | + (FSK L) | | | | | |
| 8.83MHz window-joining | | | | | | | | | | | | | | | | |
| 455kHz window-joining*4,5 | - (D 455) | | | + (D 455) | | | | | | | | | | | | |

*1 : Although receiver data has an independent value for each mode.

Transmitter data is fixed because the 8.83MHz filter bandwidth is fixed.

*2 : Although it has an independent value for each mode.

*3 : The slope low-cut is carried out at 455kHz and high-cut is carried out at 8.83MHz.

*4 : The LSB and USB may have the same value because the filter bandwidth is wide.

*5 : The positive direction for adjustment is the direction in which the receive carrier frequency increases.

Table 7 LO4 frequency configuration

TS-870S

CIRCUIT DESCRIPTION

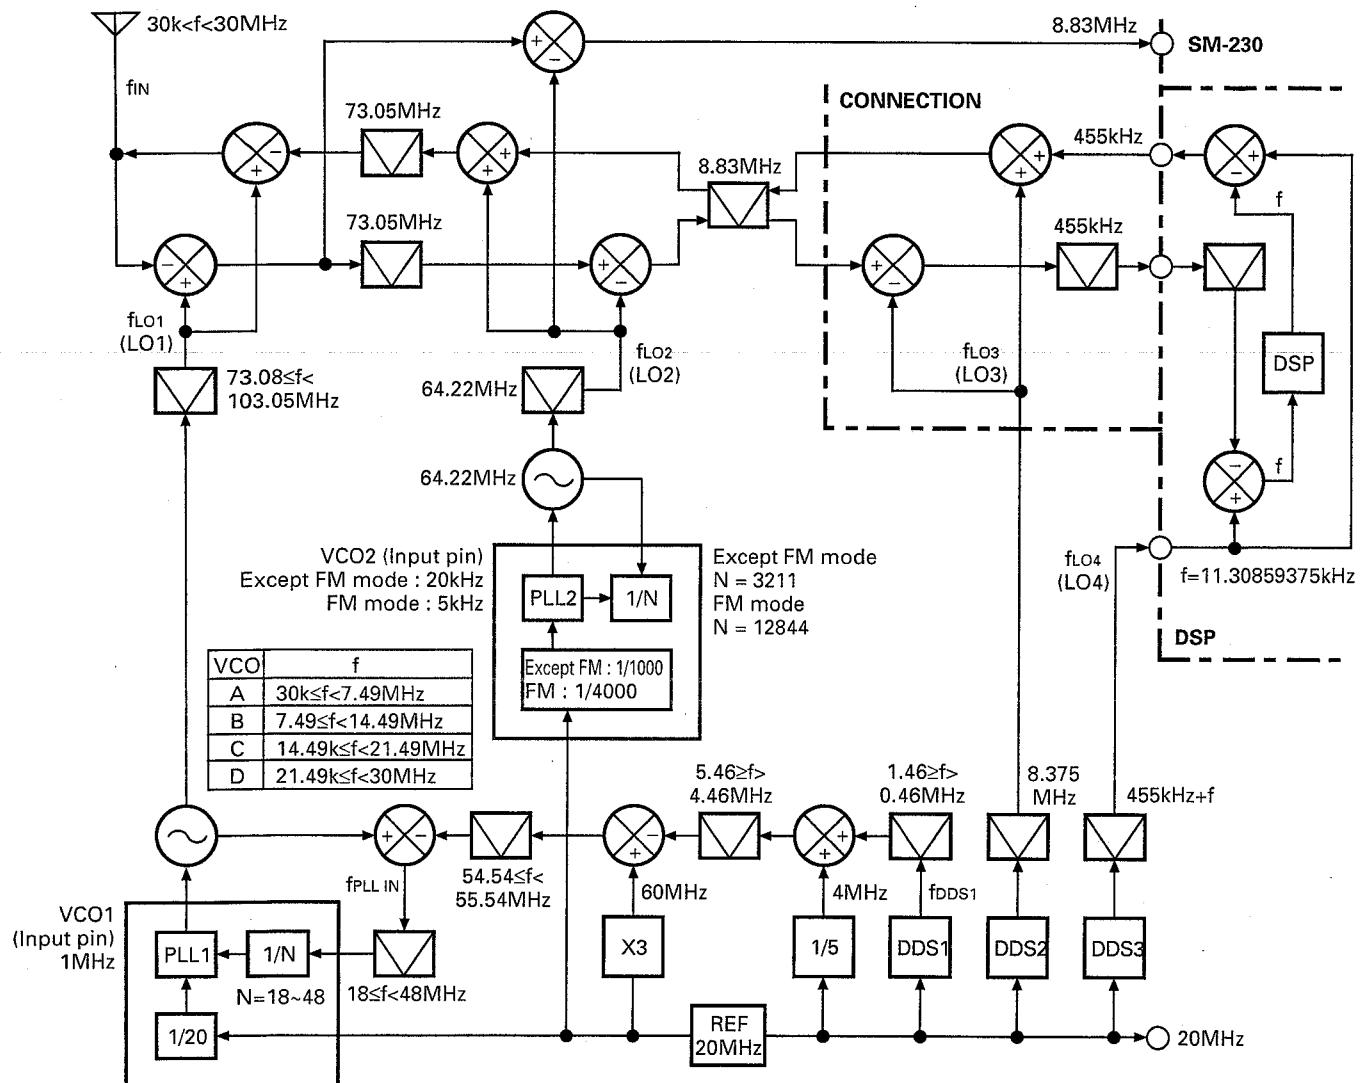


Fig. 6 Frequency configuration

TS-870S

CIRCUIT DESCRIPTION

Transmitter Circuit

The transmitter system block diagram is shown in Figure 7.

The TS-870S has the same frequency configuration as the TS-850 after the DSP generates the IF signal and converts it to 455kHz as a basic configuration.

A difference from the conventional model other than DSP modulation is that the TS-870S uses a digital-to-analog converter and a microcomputer for various controls. This allows for fine control and reduces the number of controls needed for adjustment.

The TIF (second IF) signal output from the TX-RX unit goes to the final unit (C/5 connection section). The signal is converted from 455kHz to 8.83MHz. The 8.83MHz third IF signal converted by the Q470 and Q471: 3SK131(M) mixer is switched to the transmitter by the D450 diode switch, and output from CN412 to the RF unit (A/9 RF section) as TR88 signal.

The signal input to CN10 of the RF unit is passed through the 8.83MHz IF filter used for both transmission and reception. During transmission, XF3 BW: 5kHz is selected by D69 and D67 and the filter attenuates the components outside the band. The transmit signal switched by D68 is amplified and ALC-controlled by the Q39 ALC amplifier, and the resulting signal goes to the D49 TX gain control circuit. This circuit controls the gain at the transmission stage according to the given voltage via a variable attenuator of a pin diode. The control voltage is controlled by a microprocessor, and is used to set the gain for each band or set the gain with the PWR knob and mode.

The third IF signal is then converted to the 73.05MHz fourth IF signal by the Q37 and Q38 : 3SK131(M) mixer. The signal is passed through the LC filter, and is converted to the target frequency by the final local oscillator LO1 at the Q35 and Q36 : 3SK184(R) mixer. The signal is passed through the radiation filter and the band-pass filter used by both the transmitter and receiver sections to attenuate the spurious outside the band. The band-pass filter output is amplified by Q5 : 2SC2954, and output to the final unit (A/5 final section) from CN4 as the drive signal.

■ TX-AGC

The DSP controls the input level until it starts modulation. It is like AGC applied to the microphone amplifier, and when the input level exceeds the certain level, the amplifier gain decreases to keep the modulator input level constant, i.e., to keep the IF output constant.


The MIC gain control in SSB and AM modes is used to adjust the maximum gain of the AGC amplifier in the 40dB range. Even if the control is set maximum, the input level to the modulator is kept constant. If the PROC is OFF in SSB mode, the CAR level (TIF output level) is fixed, and the ALC effect is limited. If the PROC is ON in SSB mode, the ALC effect is adjusted by the CAR control. The microphone amplifier gain is fixed, but the speech processor input level is controlled by the AGC and then becomes the level set by the PROC control.

In FM mode, the microphone amplifier sensitivity can be changed to high or low by using Menu No.61. Since the frequency deviation is limited by the TX-AGC, it is not distorted extremely like in the clipper method. In AM mode, the sensitivity is controlled so that modulation does not exceed 70%.

The TX-AGC is required to stabilize the DSP modulator operation. The modulator may operate without using the AGC by reduction of the gain and input level, but it cannot be completely turned OFF. Care must therefore be taken when measuring the ALC properties and frequency characteristics.

TS-870S TS-870S

CIRCUIT DESCRIPTION

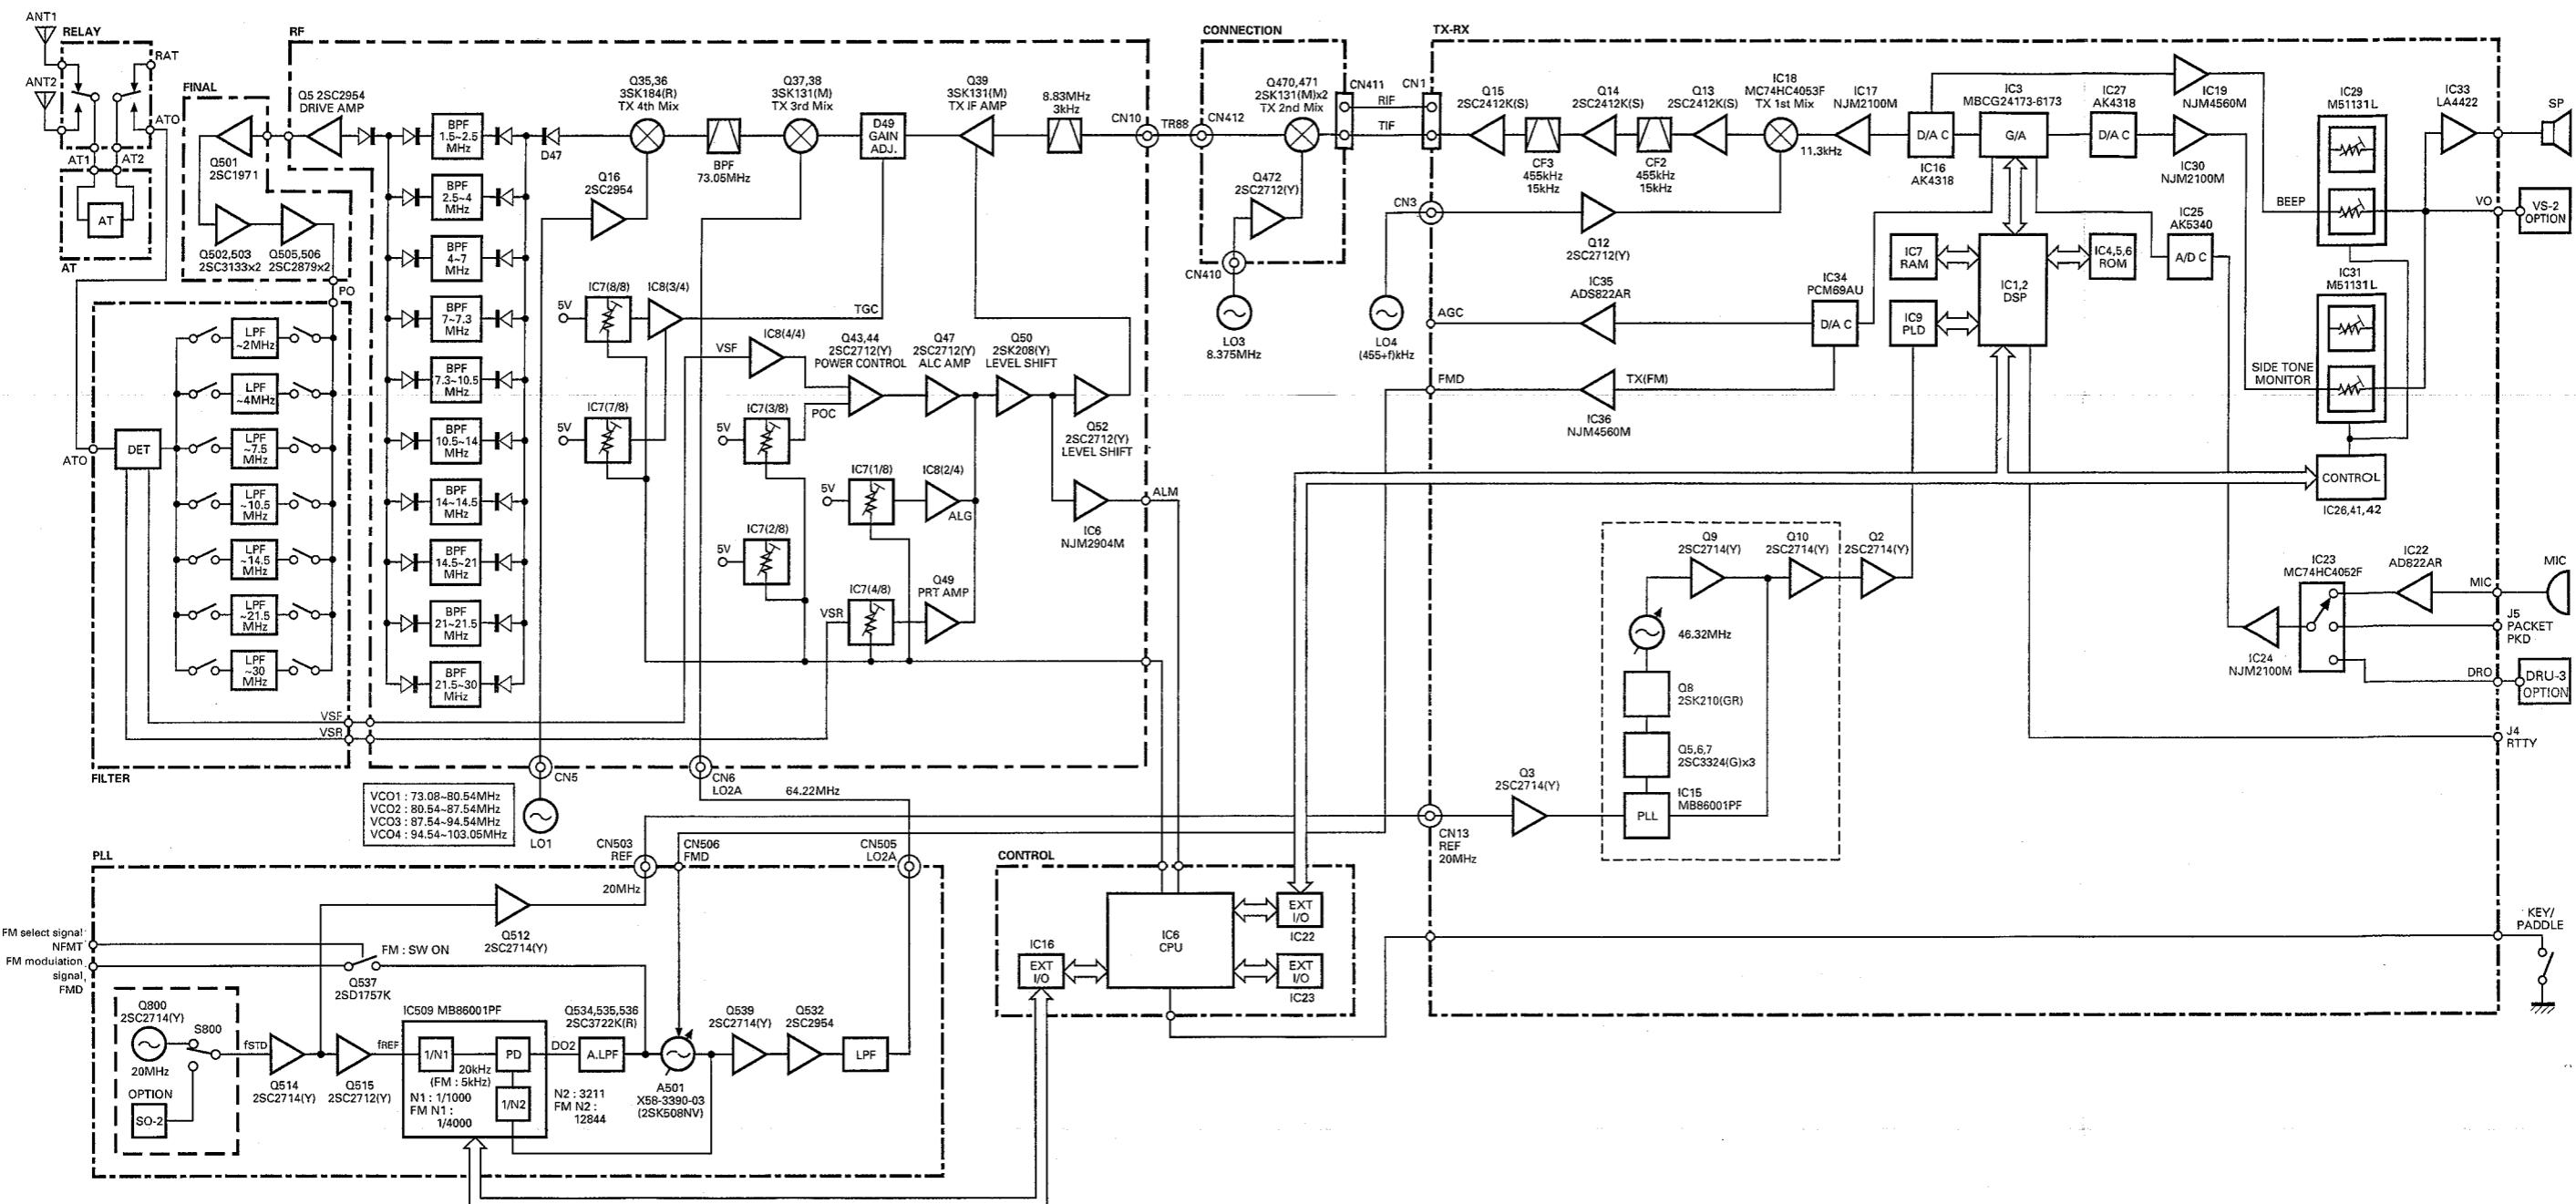

CIRCUIT DESCRIPTION**■ Various control circuits by the digital to analog converter**

The circuits whose signal levels were varied with volume controls or adjusted with semi-fixed volumes can be controlled with a microcomputer by using an 8-channel digital to analog converter.

The digital-to-analog converter (M62363FP) is a ladder-type variable attenuator with 8-channel independent inputs, which is used to output an output voltage by entering a fixed voltage, or is used as for volume by entering the control signals directly. Table 8 lists controls in each channel.

| CH No. | PIN No. | Signal name | Control | Output to |
|--------|---------|-------------|--------------------------------------|--|
| 1 | 2 | ALG | ALC reference voltage | IC8-5 operational amplifier |
| 2 | 3 | NBV | NB threshold voltage | IC9-5 NB pulse generation circuit |
| 3 | 10 | POC | Power control reference voltage | Q43 ALC circuit differential input section |
| 4 | 11 | PRO | Reflected wave protection adjustment | Q49 protection control circuit |
| 5 | 14 | Unused | | |
| 6 | 15 | Unused | | |
| 7 | 22 | POVR | Gain correction for power control | IC8-10 TGC circuit |
| 8 | 23 | TGX | Gain correction between bands | IC8-9 TGC circuit |

Table 8 digital-to-analog converter control

■ ALC circuit

The TS-870S uses the same control circuit as for the TS-850 as shown in Figure 8. Q43 and Q44 comprise a differential amplifier, and the VSF (forward wave voltage) signal is compared with the IC7-VO3 power control voltage (POC). The POC voltage is controlled by the microprocessor according to the power settings, such as power volume and mode-specific power down.

Q45 is a switch for average power control during AM transmission. In modes other than AM, the ALC is controlled by detecting the peak value, but in AM mode, a control output smoothing circuit is used to control output power with the average power.

In AM mode, the AMB signal and the base of Q46 go HIGH. The collector of Q48 goes HIGH, and about a 20ms pulse is input to the base of Q51 to turn it ON. Since Q45 is still OFF immediately after transmission starts, the ALC is controlled by detecting the peak value. However, average value control is used after about 20ms, and the average output does not change when modulation occurs. If the ALC is controlled by the average value soon after transmission starts, the ALC voltage does not stabilize for awhile and the preset power is exceeded. Thus, the ALC is controlled by detecting the peak value soon after transmission starts.

The differential amplifier output level is converted by Q47, Q50, and Q52, and the gain is controlled by the second gate of the Q39 ALC amplifier.

Q49 controls SWR protection using the adjusted VSR (reflected wave voltage) signal.

The level of the voltage taken from the ALC circuit is converted by IC6 (B/2) and the ALC meter signal is output to the A/D port of the control unit as the ALM signal. The ALC meter is adjusted so that it indicates a value according to the DSP output level set in the adjustment mode.

■ Transmission gain control

If transmission occurs with several bands as with an HF transceiver, the gain changes between bands due to the effects of frequency characteristics of the final unit, low-pass filter, or mixer circuit, and the CAR level must be adjusted each time the band is changed.

This model uses a pin diode variable ATT and microprocessor-controlled digital-to-analog converter to correct the total gain between bands and correct the gain with power control. Thus, the total gain is the same in each band.

CIRCUIT DESCRIPTION**■ CAR control**

The CAR volume signal is read by the analog to digital converter and output to the DSP via the microprocessor. The DSP controls the output level required according to the mode. If PROC is OFF in SSB mode and in FM mode, the level is fixed, but in other modes it can be adjusted in the 30-dB range using the CAR control.

The level required for each adjustment is output in the adjustment mode to facilitate adjustment.

■ Final circuit

The drive output from the CN4 of the RF unit is input to CN501 of the final section (X45-351 A/5). The harmonics of the signal amplified to 100W by Q501 to Q505 are attenuated by a low-pass filter in the filter section (X45-351 B/5), and the resulting signal goes to the relay section (X45-351 E/5).

The transmit signal input to the relay section is passed through the transmit/receive switching relay, the through/in relay in the AT unit (X53-3340-02), and the ANT A/B switching relay, and goes to the ANT terminal.

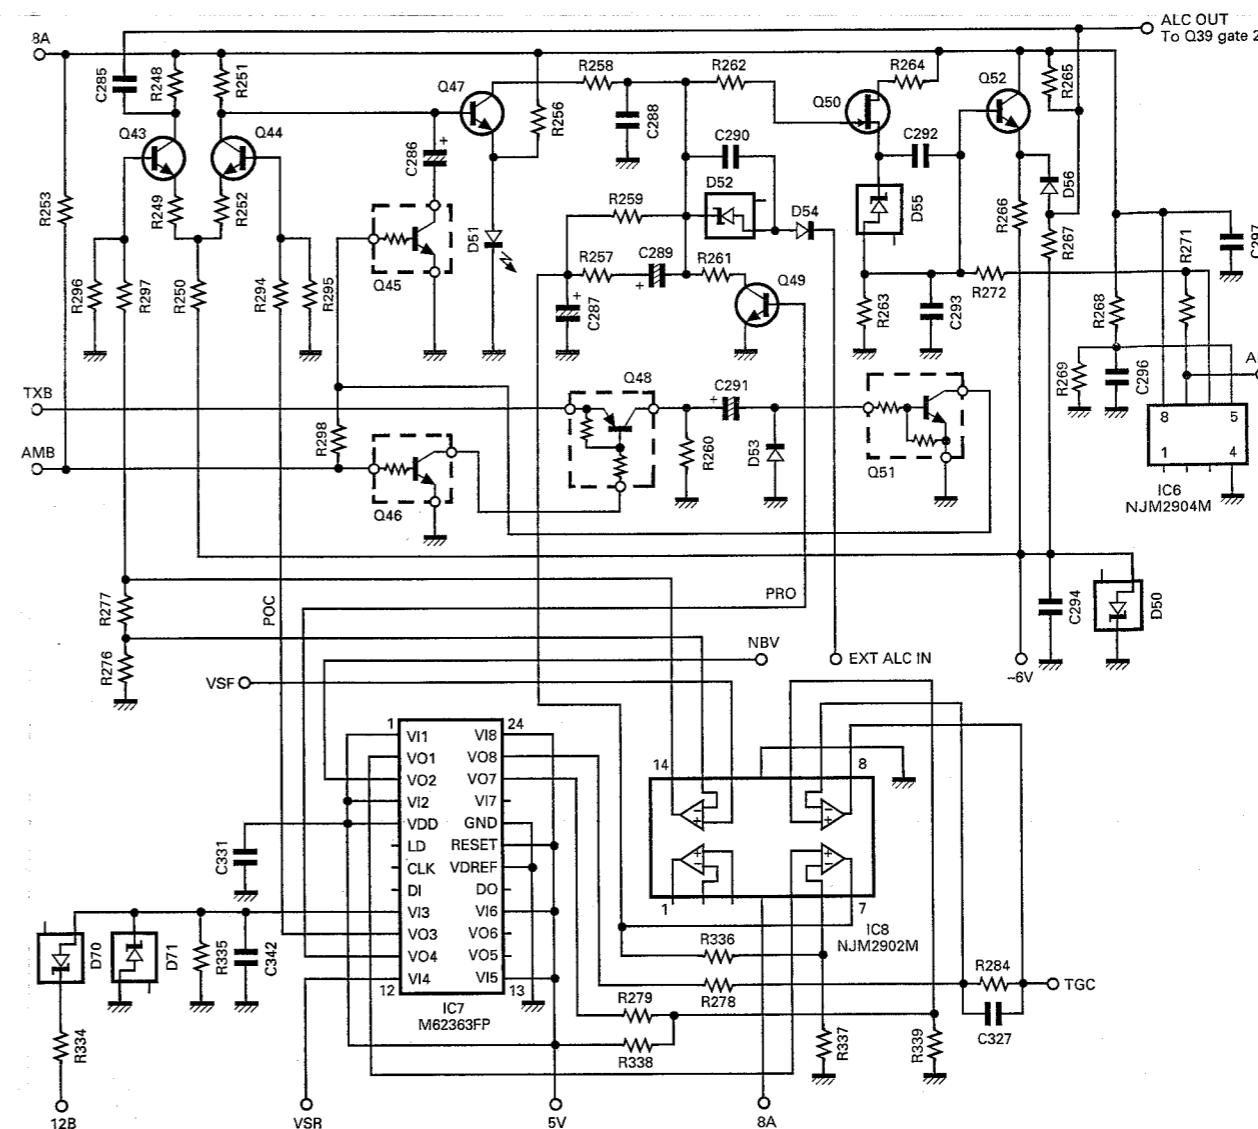


Fig. 8 ALC circuit

CIRCUIT DESCRIPTION

AT Unit (Auto Antenna Tuner)

When the AUTO/THROUGH switch is set to AUTO, ATA goes LOW, the AUTO/THROUGH switching relay K1 is executed, and AT is inserted to prepare for tuning. If "RX AT ON" is set in menu No.8, AT is inserted during reception. If the position of variable capacitor VC1 or VC2 is not the preset position of the band, presetting is performed. The AT tune and transmission do not occur until presetting ends.

When AT TUNE is turned on with this condition, ATS goes HIGH, the CW mode is set, and the transmission output becomes about 10W. If the SWR is lower than 1.2, the tuning is completed and auto antenna tuning ends. If the SWR is greater than 1.2, the motor control pulse duty (described later) is controlled according to the SWR.

The SWR can be set to 1.6 after AT tuning by turning menu No. 33 "TUNE WIDE" ON.

The motor speed is determined by a microcomputer. Its direction is controlled by phase comparator IC1 and amplitude comparator IC6 if the APRE is LOW, and controlled by the microcomputer if the APRE is HIGH.

■ Auto tuning mode

The transmission power from the final section via the filter section is passed through the current/voltage detection transformer L1 and L2, which use a toroidal core. The current and voltage components detected here are rectified by the waveform rectification circuit consisting of D4, D7, Q1, and Q2, and then the phase is compared by IC1. The output signals (\bar{Q} and Q) from pins 8 and 9 of IC1 are passed through the switch by IC2 and are applied to motor drive IC IC4. Variable capacitor VC1 is rotated by the motor M1 so that the phase difference of the voltage and current components decreases.

The voltage and current components detected by L1 and L2 are rectified by diodes D1 and D2 and are applied to the comparator of voltage comparison circuit IC6 as the amplitude component. The comparator output is passed through switch IC3. Motor M2 is driven by another motor drive IC IC5 and variable capacitor VC2 is rotated in the direction that decreases the amplitude difference of the voltage and current components.

Variable capacitor VC1 for capacity adjustment is therefore controlled so that the current and voltage phases match. Variable capacitor VC2 for resistance adjustment is controlled so that the current and voltage amplitude difference decreases. SWR becomes 1 when the phases match and the amplitude difference is zero.

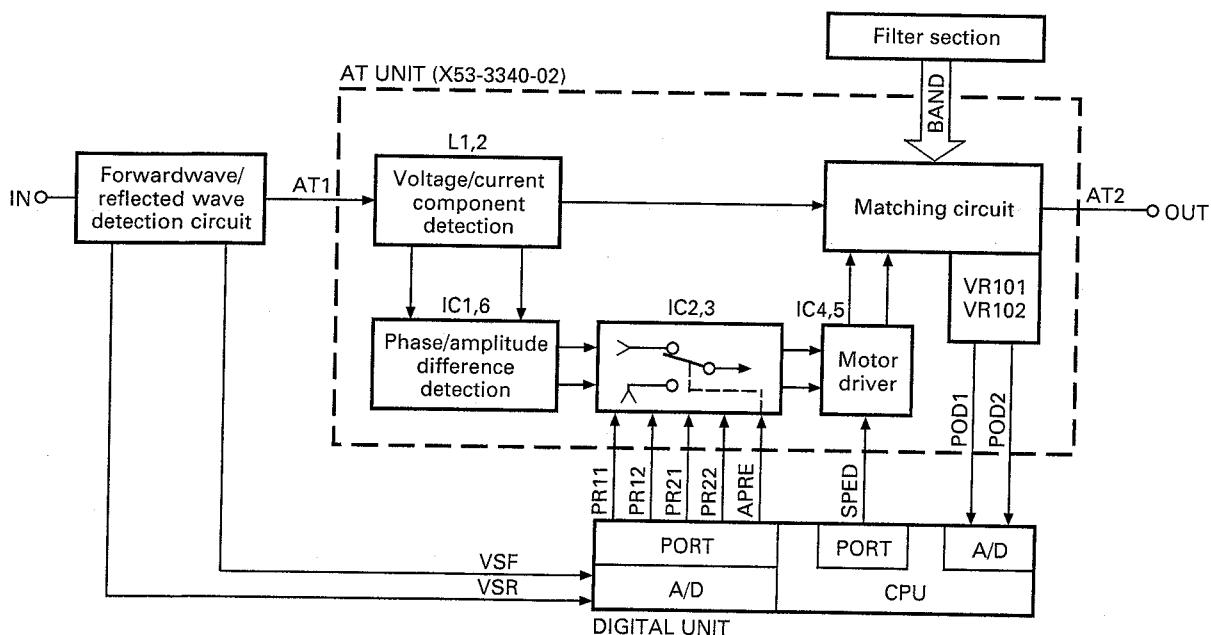


Fig. 9 AT unit block diagram

TS-870S

CIRCUIT DESCRIPTION

The speeds of motors M1 and M2 are determined by the duty cycle of the pulse input to control input pin 8 of IC4 and IC5, and controlled by the standing wave ratio (SWR) calculated by the control unit CPU.

Pulse signal SPED output from the control unit is passed through Q5 : DTC114EK, amplified by Q4, and input to IC4 and IC5 as a control pulse.

If the SWR is 2 or more, the duty cycle of the motor drive voltage pulse is 100%. If the SWR is 1.5 to 2, the duty cycle becomes approx. 80%. If the SWR is less than 1.5, the duty ratio becomes approx. 50% and the motor runs at low speed.

The matching circuit is T-type, and the tap position from 1.8 to 30MHz is switched by seven relays K101 to K103 and K105 to K108.

Position detection volumes VR101 and VR102 are linked to the rotation axes of variable capacitors VC1 and VC2 with a gear ratio of 1 : 1. The voltages of 0 to 5V (POD1 and POD2) are generated according to the capacities of the variable capacitors. This position voltage data is sent to the microprocessor in the control unit through the analog to digital converter, and is used as the reference voltage in the feedback control system, such as for preset tuning. The same signal is also used for presetting data and end-detection.

The volume used by the TS-870S is a normal one, not an endless one. Since the rotation angle of this volume is limited, the rotation range is from the minimum capacity to the maximum capacity plus allowance.

By this control, like the preset tuning, which will be described later, POD1 and POD2 are monitored by the microprocessor. If the lower limit voltage of 0.6V or the upper limit voltage of 4.2V is reached, the microprocessor detects that the voltage is close to a limit. To return the voltage to the opposite side, APRE is made HIGH. If the variable capacitor is VC1, and the voltage is close to the lower limit in respect to POD1, the voltage near the upper limit is output. If the voltage is close to the upper limit in respect to POD1, the voltage near the lower limit is output.

The other variable capacitor VC2 outputs the voltage read by POD2 as it is. If the variable capacitor voltage exceeds the specified limit, it returns to the other limit. The other variable capacitor remains in the same position.

If the APRE is HIGH, the motor rotation direction is determined by the CPU unless auto tuning is performed.

The logic for PR11 to PR22 is the same as for IC4 and IC5 : BA6109U2. The signal output from the digital unit passes through IC2 and IC3 : TC4066BP and enters IC4 and IC5.

| | | PR11 | PR12 | PR21 | PR22 |
|---------|------------------|------|------|------|------|
| Motor 1 | Normal rotation | H | L | - | - |
| | Reverse rotation | L | H | - | - |
| Motor 2 | Normal rotation | - | - | H | L |
| | Reverse rotation | - | - | L | H |

■ Preset tuning

When tuning ends, the position of the variable capacitor is stored in memory by the microprocessor as preset data for that band.

When the band is changed after tuning is performed in another band, APRE goes HIGH, the motor is controlled by the microprocessor, and preset tuning is performed. During preset tuning, auto tuning or signal transmission is inhibited even if the AT TUNE switch is pressed or transmission becomes ready.

The initial preset-data when the microprocessor is reset includes standard data for a 50-ohm load on each band.

■ Preset memory band

30kHz ≤ f
1.850MHz ≤ f
2.010MHz ≤ f
3.525MHz ≤ f
3.575MHz ≤ f
3.725MHz ≤ f
4.490MHz ≤ f
7.030MHz ≤ f
7.100MHz ≤ f
7.490MHz ≤ f
10.490MHz ≤ f
14.100MHz ≤ f
14.490MHz ≤ f
20.990MHz ≤ f
21.150MHz ≤ f
21.990MHz ≤ f
25.490MHz ≤ f
29.000MHz ≤ f


CIRCUIT DESCRIPTION

Standby Control and Timing


Standby control and timing are carried out by using software for the main CPU in the control unit (X53-356X-XX). The control signals for the control unit are listed below. (See Figure 10 for each timing chart.)

- SS : Standby switch input signal. Active LOW.
- KEY : Keying input signal from the keyer. Active LOW.
- TXC : Transmission output signal. Active HIGH. Same timing as TXB.
- RXC : Reception output signal. Active HIGH. Same timing as RXB.
- CKY : Output signal. Active HIGH.

With the SS line

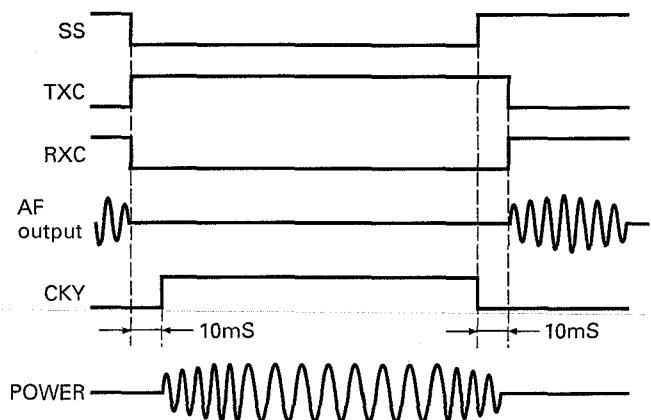

By full break-in

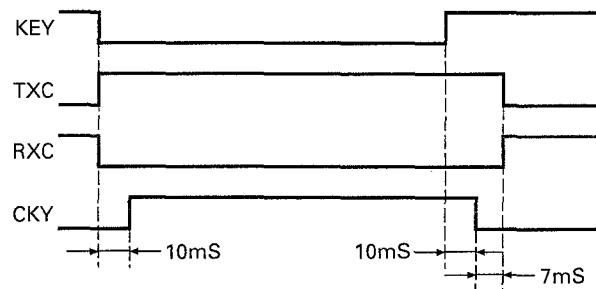

by semi break-in

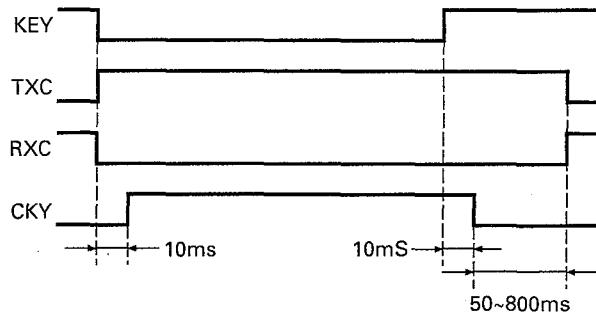


Fig. 10 Transmit/receive signal timing chart

TS-870S

CIRCUIT DESCRIPTION

Digital Control Unit

The TS-870S digital control circuit has a multiple chip configuration centered around the main CPU (IC6 : M37702S4BFP), and consists of a 64K ROM (IC12 : 27C512RJLVC), an 8K RAM (IC8 : LC3564QME-10), and an extended I/O (IC16, IC22, IC23 : CXD1095Q). This circuit controls about 60 different input and about 80 different output signals.

Figure 11 is a digital control block diagram.

■ Address control

The main CPU operates in the microprocessor mode in which the external ROM is used. The memory is configured as shown in the memory map, and the main CPU A12 to A15 and D0 signals and IC14, IC17, IC18, and IC19 are used to generate a chip select (CS) signal to select and access an IC. (Figure 12)

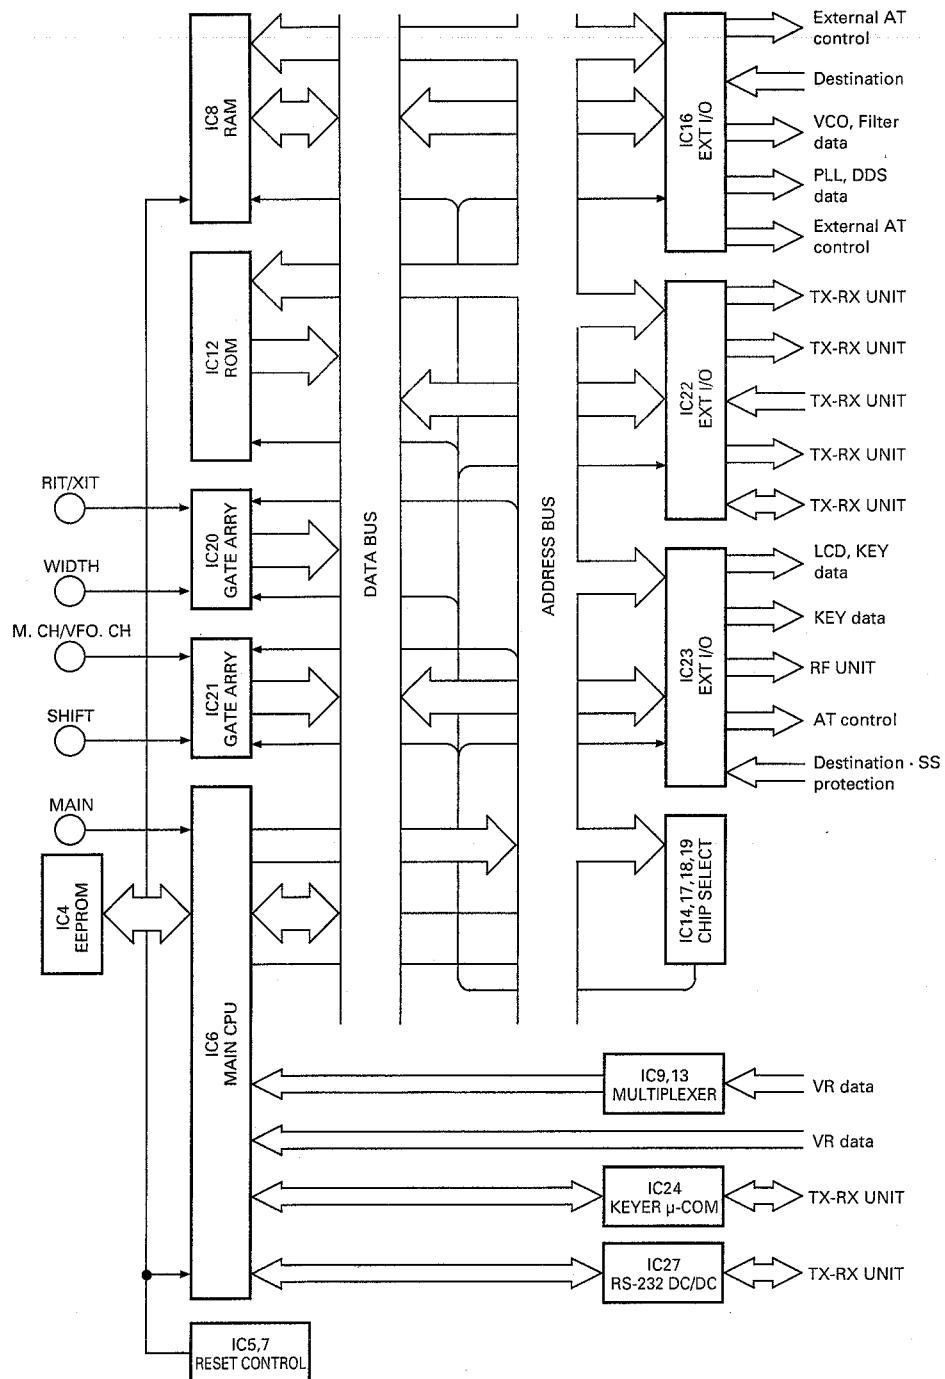


Fig. 11 Digital control block diagram

CIRCUIT DESCRIPTION

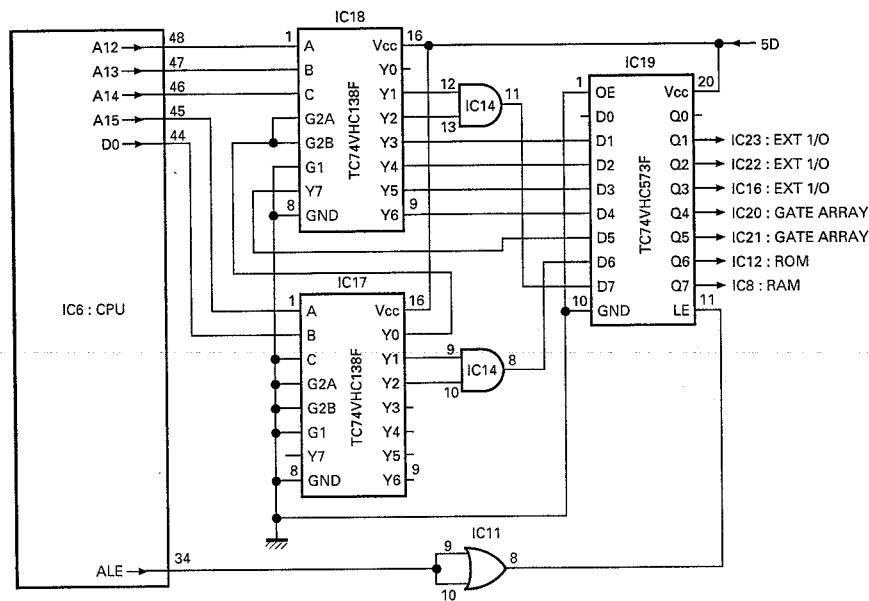


Fig. 12 Address control circuit

Encoder circuit

The main encoders are magnetic rotary encoders, and the click, RIT, SHIFT, and WIDTH encoders are contact-type rotary encoders.

The main encoder pulses are read directly by the main CPU.

The other encoder pulses enter the gate array (IC20 and IC21 : LZ92K371), and are read through the main

CPU data bus. The gate array is selected by the latch (IC19 : TC74VHC573F) Q4 and Q5. The CK1, CK2 or CK3, CK4 encoder is selected by A0 of the gate array. Encoder data is output to D0 to D7 by making the read signal (RD) LOW when the chip select (CS) signal is LOW. IC25 and IC26 absorb encoder pulse chattering. (Figure 13)

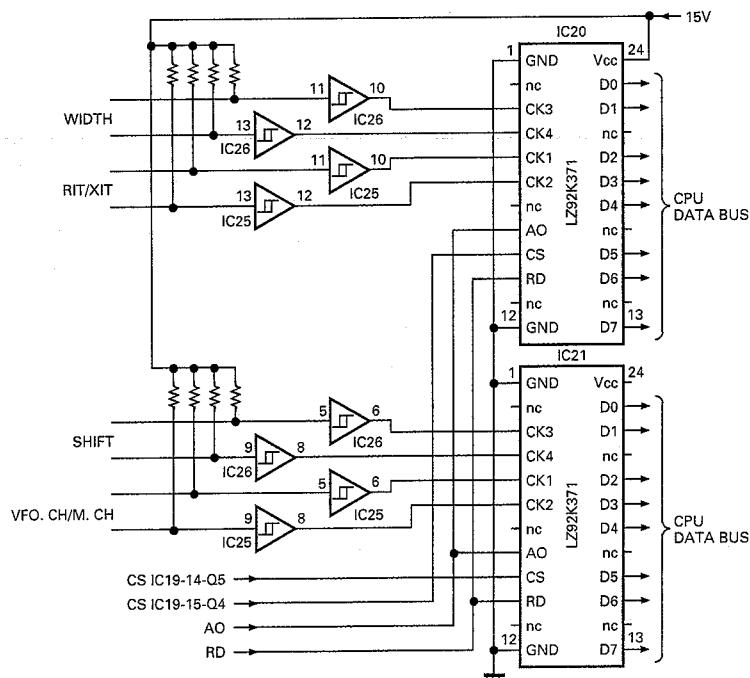


Fig. 13 Encoder circuit

TS-870S

CIRCUIT DESCRIPTION

■ System reset and RAM backup

The power monitor circuit (Q1, Q2, D4, D5, R6) monitors the power supply voltage. If the voltage is LOW, the circuit outputs a LOW signal to the INT1 port of the main CPU and the IRQ2 port of the microprocessor in order for the electronic keyer to stop operation. At the same time, the battery backup IC (IC5 : MB3780A) backs up the RAM with a lithium battery.

If the power supply voltage becomes normal, a HIGH signal is input to the INT1 port and the IRQ2 port, and the main CPU is initialized by the battery backup IC after the time constant set by C56 and C57. The operation resumes and power is supplied to the RAM from the outlet. (Figure 14)

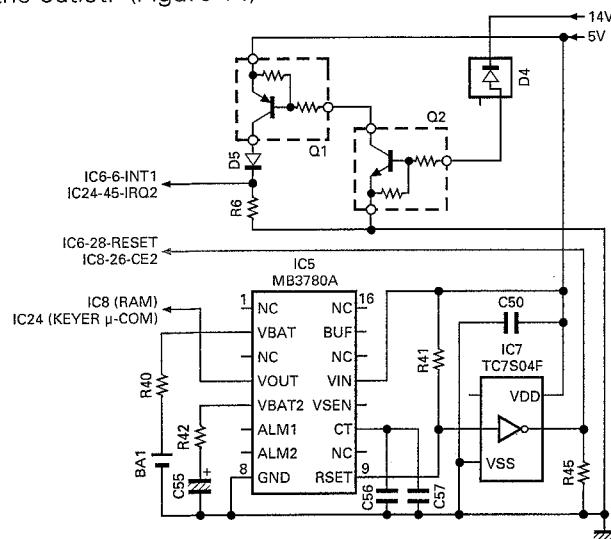


Fig. 14 System reset and RAM backup

■ Analog Signal Input

The main CPU incorporates an 8-channel analog-to-digital (A/D) converter, and in addition, has a multiplexer (IC9 and IC13 : TC4052BF) for entering 16-channel analog signals. Incoming analog signals are converted by the main CPU to digital values, which are used as digital data.

■ Display

Since the TS-870S uses a negative LCD and a fluorescent display tube.

The LCD is lighted with half a duty by the LCD driver, and the fluorescent display tube is lighted by an inverter.

The LCD driver data is set by the clock signal (UCK1), data signal (UDA1), and enable signals (ENL2, ENL3). The blanking signal (BLANK) turns the LCD driver OFF, and the dimmer signal (DIM) changes the inverter duty for dimmer.

■ Key scan

The PB0 and PB7 of IC23 and O2 to O8 of IC501 form a keyboard matrix. A key scan signal (a negative pulse) is output from the O2 to O8. One column corresponding to the PB0 and PB7 is selected, and the state of that switch is read. When the switch at the intersection of the matrix is pressed, the PBx port bit goes LOW. Thus, which switch is pressed can be detected. The key chattering is eliminated by software. (Figure 15)

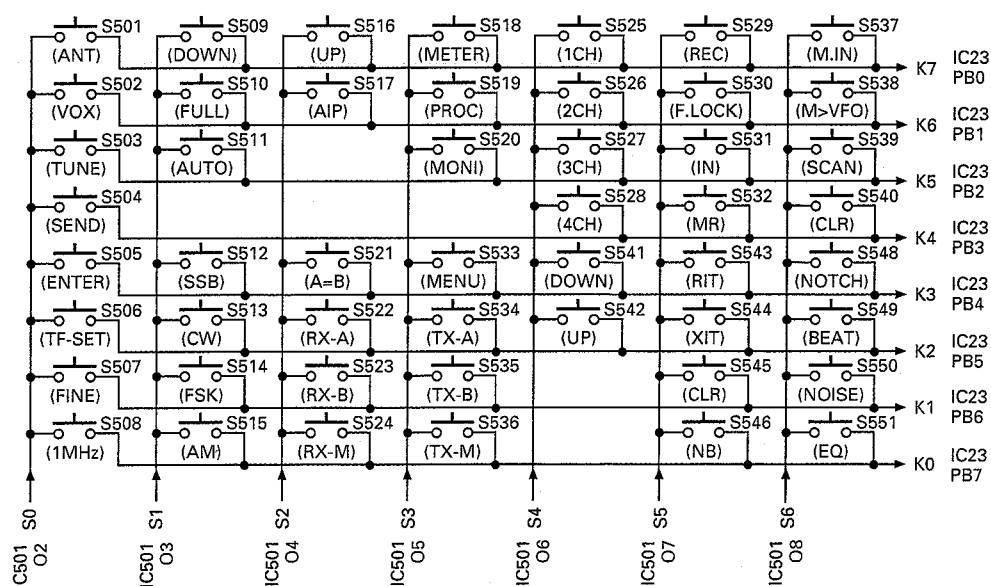


Fig. 15 Key scan circuit

CIRCUIT DESCRIPTION

■ PLL and DDS data

The TS-870S has three PLLs and three DDSs in the PLL section in the RF unit. The main CPU sends data to the PLL ICs and DDS ICs according to the displayed frequency. The PLL ICs provide unlock (UNL) signals. If one of the PLLs should unlock, the display indicates that the PLL is unlocked (Err-FE).

The TX-RX unit also has a PLL IC, to which the main CPU sends 46.32MHz data. The PLL IC also outputs an unlock signal (PLUL), and if a PLL is unlocked, an unlock message (Err-FD) is displayed.

■ AT control

The AT control inputs the variable capacitor position data (POD1, POD2, analog data input), forward wave voltage and reflected wave voltage (VSF, VSR, analog data input) for SWR calculation in the main CPU, and outputs the motor normal/reverse rotation control (PR11, PR12, PR21, PR22), motor speed control signal (SPED), and motor control switching signal (APRE).

SPED switches the motor rotation ON and OFF during AT tune and presetting by PWM with the duty cycle related to the SWR value.

APRE changes the motor normal/reverse rotation control to analog control for AT tune, and to digital control for presetting.

PR11 to PR22 control the motor normal/reverse rotations and stop when the motor normal/reverse control signal is controlled digitally. (Figure 16)

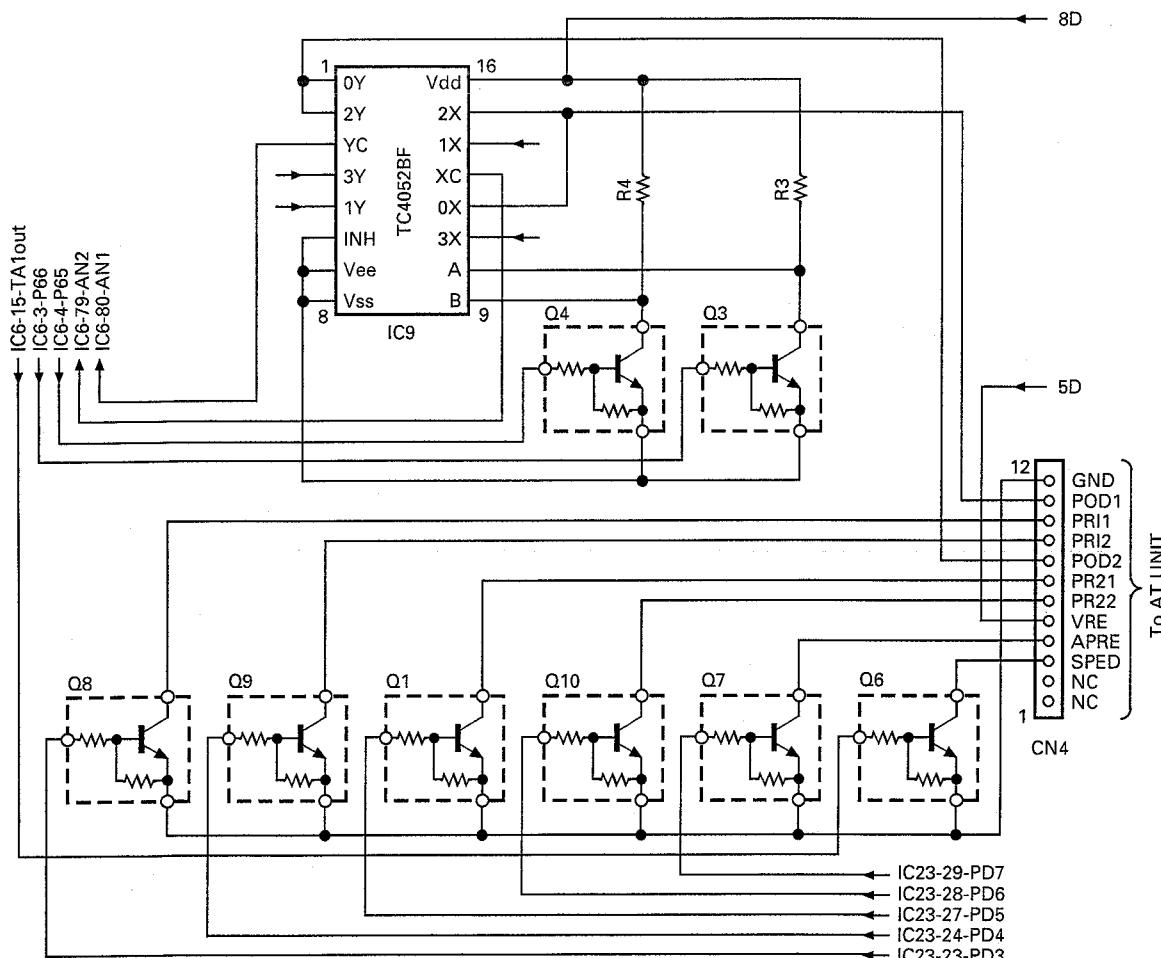


Fig. 16 AT control

TS-870S

CIRCUIT DESCRIPTION

■ IF filter switching

The IF filter switching signal from the control unit is controlled by PC0 to PC2 (pins 11 to 13) of IC23 and sent to the RF unit and final unit connection section.

The RF unit selects the 8.83MHz IF filter, and the final unit connection section selects the 455kHz IF filter.

The IF filter select signal is automatically interlocked with the WIDTH control.

| SSB | | CW | | FSK | | AM | | FM | |
|-------|-----------|-------|-----------|-------|-----------|-------|-----------|-------|-----------|
| WIDTH | IF FILTER |
| 1.4k | 3k | 50 | 3k | 250 | 3k | 5.0k | 6k | 5.0k | 15k |
| 1.6k | ↑ | 200 | ↑ | 500 | ↑ | 6.0k | 15k | 6.0k | ↑ |
| 1.8k | ↑ | 300 | ↑ | 1.0k | ↑ | 8.0k | ↑ | 8.0k | ↑ |
| 2.0k | ↑ | 400 | ↑ | 1.5k | ↑ | 10.0k | ↑ | 10.0k | ↑ |
| 2.2k | ↑ | 600 | ↑ | | | 12.0k | ↑ | 12.0k | ↑ |
| 2.4k | ↑ | 1.0k | ↑ | | | 14.0k | ↑ | 14.0k | ↑ |
| 2.6k | 6k | | | | | | | | |
| 2.8k | ↑ | | | | | | | | |
| 3.0k | ↑ | | | | | | | | |
| 3.2k | ↑ | | | | | | | | |
| 3.4k | ↑ | | | | | | | | |
| 4.6k | ↑ | | | | | | | | |
| 6.0k | 15k | | | | | | | | |

Table 9 IF filter selection

■ Receive band-pass filter selection

The RF BPF signal from the control unit is sent from PC6 (pin 17) of IC23 to the RF unit as serial data. The serial-to-parallel converter (TC9174F) in the RF unit converts serial data to parallel data and switches between band-pass filters.

■ Transmit low-pass filter selection

The LPF signal from the control unit is sent as serial data from PC1 (pin 12) of IC16 to the final unit filter section via the final unit connection section. The serial-to-parallel converter (TC9174F) in the final unit filter section converts serial data to parallel data and switches between low-pass filters.

■ PLL VCO data

The RF unit PLL section switches between VCOs according to the VCO band data (VB0 to VB3) output from PC4 to PC7 (pins 15 to 18) of IC16 in the control unit.

■ Electronic keyer

The TS-870S uses a dedicated IC (IC24 : 68HC05G2419553) to control the electronic keyer. The main CPU CH1 to CH4 signals switch operations to the electronic keyer IC (keyer microprocessor).

The keyer microprocessor controls the electronic keyer according to KEY SPEED VR data, DOT/DASH signal, and CH1 to CH4 signals switch operation signals from the main CPU.

The keyer microprocessor is normally at the standby mode (power save mode). Each control signal is connected to PB7 (pin 77). When this port is LOW, the standby mode is terminated.

When the standby mode is cancelled, PA7 (pin 30) outputs a HIGH signal. It is used to determine which control signal is active : CH1 to CH4, KEY SPEED VR data, or DOT/DASH signal.

PA2 (pin 25) is an input/output port that inputs KEY SPEED VR data and outputs control signal (HIGH) for VR data determination.

When a HIGH signal is output from PA2 (pin 25), C114 is charged. KEY SPEED VR data is calculated until C114 is discharged and the port goes LOW.

IRQ2 (pin 41) is an interrupt port that detects power supply voltage drop. When this port detects it, the standby mode is entered.

The keyer microprocessor outputs the key down and beep signals. The key down signal is input to IC22 (PC4 : pin 15), and the main CPU controls transmission and reception. The beep signal is input to IC29 (TC7S32F : OR gate) and output to the TX-RX unit as CKY.

The TX-RX unit determines the key jack ON/OFF and CKY level and outputs sidetone.

TS-870S

CIRCUIT DESCRIPTION

■ Band data

| Frequency (MHz) | RF BPF (RB) | LPF | VCO | | | | PLL | Frequency (MHz) | RF BPF (RB) | LPF | VCO | | | | PLL | | | | | | | |
|-----------------|-------------|-----|-------------|-------------|----|----|-----|-----------------|-------------|-------|-----|----|---|---|-----|-------------|-------------|----|----|---|----|----|
| | | | Lower limit | Upper limit | RX | TX | | | | | A | B | C | D | N | Lower limit | Upper limit | RX | TX | A | B | C |
| 0.01 | 0.49 | 1 | 1 | | | | 1 | 38 | 15.49 | 15.99 | | | | | 10 | 10 | 6 | 0 | 0 | 1 | 0 | 23 |
| 0.49 | 0.99 | 2 | 2 | | | | | 38 | 15.99 | 16.49 | | | | | | | | | | | | 22 |
| 0.99 | 1.705 | | | | | | | 37 | 16.49 | 16.99 | | | | | | | | | | | | 22 |
| 1.705 | 2.01 | 3 | 3 | | | | 2 | 37 | 16.99 | 17.49 | | | | | | | | | | | | 21 |
| 2.01 | 2.49 | | | | | | | 36 | 17.49 | 17.99 | | | | | | | | | | | | 21 |
| 2.49 | 2.99 | 4 | 4 | | | | | 36 | 17.99 | 18.49 | | | | | | | | | | | | 20 |
| 2.99 | 3.49 | | | | | | | 35 | 18.49 | 18.99 | | | | | | | | | | | | 20 |
| 3.49 | 3.99 | | | | | | | 35 | 18.99 | 19.49 | | | | | | | | | | | | 19 |
| 3.99 | 4.49 | 5 | 5 | | | | 3 | 34 | 19.49 | 19.99 | | | | | | | | | | | | 19 |
| 4.49 | 4.99 | | | | | | | 34 | 19.99 | 20.49 | | | | | | | | | | | | 18 |
| 4.99 | 5.49 | | | | | | | 33 | 20.49 | 20.99 | | | | | | | | | | | | 18 |
| 5.49 | 5.99 | | | | | | | 33 | 20.99 | 21.49 | 11 | 11 | | | | | | | | | 17 | |
| 5.99 | 6.49 | | | | | | | 32 | 21.49 | 21.99 | 12 | 12 | | | | | | 0 | 0 | 0 | 1 | 17 |
| 6.49 | 6.99 | | | | | | | 32 | 21.99 | 22.49 | | | | | | | | 7 | | | | 16 |
| 6.99 | 7.3 | 6 | 6 | | | | | 31 | 22.49 | 22.99 | | | | | | | | | | | | 16 |
| 7.3 | 7.49 | 7 | 7 | | | | 4 | 31 | 22.99 | 23.49 | | | | | | | | | | | | 15 |
| 7.49 | 7.99 | | | | | | | 31 | 23.49 | 23.99 | | | | | | | | | | | | 15 |
| 7.99 | 8.49 | | | | | | | 30 | 23.99 | 24.49 | | | | | | | | | | | | 14 |
| 8.49 | 8.99 | | | | | | | 30 | 24.49 | 24.99 | | | | | | | | | | | | 14 |
| 8.99 | 9.49 | | | | | | | 29 | 24.99 | 25.49 | | | | | | | | | | | | 13 |
| 9.49 | 9.99 | | | | | | | 29 | 25.49 | 25.99 | | | | | | | | | | | | 13 |
| 9.99 | 10.49 | | | | | | | 28 | 25.99 | 26.49 | | | | | | | | | | | | 12 |
| 10.49 | 10.99 | 8 | 8 | | | | 5 | 28 | 26.49 | 26.99 | | | | | | | | | | | | 12 |
| 10.99 | 11.49 | | | | | | | 27 | 26.99 | 27.49 | | | | | | | | | | | | 11 |
| 11.49 | 11.99 | | | | | | | 27 | 27.49 | 27.99 | | | | | | | | | | | | 11 |
| 11.99 | 12.49 | | | | | | | 26 | 27.99 | 28.49 | | | | | | | | | | | | 10 |
| 12.49 | 12.99 | | | | | | | 26 | 28.49 | 28.99 | | | | | | | | | | | | 10 |
| 12.99 | 13.49 | | | | | | | 25 | 28.99 | 29.49 | | | | | | | | | | | | 9 |
| 13.49 | 13.99 | | | | | | | 25 | 29.29 | 29.99 | | | | | | | | | | | | 9 |
| 13.99 | 14.35 | 9 | 9 | | | | | 24 | 29.99 | 30 | | | | | | | | | | | | 9 |
| 14.35 | 14.49 | 10 | 10 | | | | 6 | 0 | 0 | 1 | 0 | 24 | | | | | | | | | | |
| 14.49 | 14.99 | | | | | | | 23 | | | | | | | | | | | | | | |
| 14.49 | 15.49 | | | | | | | | | | | | | | | | | | | | | |

TS-870S

CIRCUIT DESCRIPTION

■ Function of IC pins

1) CPU : M37702S4BFP (Control unit IC6)

| Pin No. | Port name | Pin name | I/O | Function | Active level | Initial state |
|---------|---------------|------------|-----|---|--------------|---------------|
| 1 | AN0 | ADRO | I | VPRC, VMON, VAGC signal | | |
| 2 | P67 | RES | O | Reset signal output | L | H |
| 3, 4 | P66, P65 | CTB, CTA | O | Analog switch select control signal B, A | H | H |
| 5 | INT2 | PSW | I | Power switch inhibit signal | H | |
| 6 | INT1 | BOVR | I | 14V voltage drop inhibit signal | | |
| 7 | INT0 | | I | Unused | | |
| 8, 9 | TA4IN, TA4OUT | EDP1, EDP2 | I | Main encoder pulse input | | |
| 10, 11 | TA3IN, TA3OUT | | O | Unused | L | |
| 12, 13 | TA2IN, TA2OUT | | O | Unused | L | |
| 14 | P53 | AMUT | I | AF mute signal | L | H |
| 15 | TA1OUT | SPED | O | AT motor speed control | L | H |
| 16 | P51 | LCD | O | LCD and LED serial data | | H |
| 17 | P50 | LCK | O | LCD and LED serial clock | | H |
| 18 | P47 | BLK | O | LCD all off control signal | H | L |
| 19 | P46 | RBK | O | RF mute signal | L | L |
| 20 | P45 | 14VSW | O | Power on control signal | H | H |
| 21 | P44 | ECS | O | EEPROM clock | | H |
| 22 | P43 | EED | I/O | EEPROM data | | |
| 23 | PHI | | | Unused | | |
| 24 | RDY | | I | Bus wait cancel | H | |
| 25 | HORD | | I | Hold state cancel | H | |
| 26 | BYTE | | I | External data bus width 8 bit setting | H | |
| 27 | CNVss | | I | | | |
| 28 | RESET | | I | Reset signal input | L | |
| 29, 30 | Xin, Xout | | I | Clock signal input | | |
| 31 | E | | O | | | |
| 32 | Vss | | I | | | |
| 33 | HLDA | | | | | |
| 34 | ALE | | O | | | |
| 35 | BHE | | | | | |
| 36 | R/W | | O | Read/write signal | | |
| 37~44 | D7~D0 | | I/O | Bus | | |
| 45~60 | A15~A0 | | O | Address output | | |
| 61~64 | P87~P84 | PB0~PB3 | O | Logic key CPU control 0~3 | H | L |
| 65 | TXD0 | TXD0 | O | Personal computer interface serial output | | H |
| 66 | RXD0 | RXD0 | I | Personal computer interface serial input | | |
| 67 | P81 | RTS0 | O | Personal computer interface RTS | H | L |
| 68 | CTS0 | CTS0 | I | Personal computer interface CTS | | |
| 69 | Vcc | | I | | | |
| 70 | AVcc | | I | | | |
| 71 | Vref | | I | | | |
| 72 | AVss | | I | | | |
| 73 | Vss | | I | | | |
| 74 | AN7 | ADR7 | I | Forward wave voltage (VSF) | | |
| 75 | AN6 | ADR6 | I | Reflected wave voltage (VSR) | | |
| 76 | AN5 | ADR5 | I | ALC meter analog input | | |
| 77 | AN4 | | I | Unused | | |
| 78 | AN3 | ADR3 | I | VPWR, VMIC, VDLY, VCAR signal | | |
| 79 | AN2 | ADR2 | I | POD2, VRF, POD2, VAF signal | | |
| 80 | AN1 | ADR1 | I | POD1, VNB, POD1, VSQL signal | | |

TS-870S

CIRCUIT DESCRIPTION

2) CPU : 68HC05G2419553 (Control unit IC24)

| Pin No. | Port name | Pin name | I/O | Function | Active level | Initial state |
|---------|--------------|------------|-----|---|--------------|---------------|
| 1 | VDD | | I | | | |
| 2~5 | PB3~PB0 | | I | CH4 to CH1 switch input signal from IC6 | | |
| 6~13 | AD0~AD7 | | I | Unused | | |
| 14 | VrefH | | | Unconnected | | |
| 15 | VrefL | | I | | | |
| 16 | Vss | | I | | | |
| 17 | VDD | | I | | | |
| 18, 19 | XOSC1, XOSC2 | | I | Unconnected | | |
| 20 | RES | | I | Reset signal input | | |
| 21, 22 | OSC1, OSC2 | | I | Clock input | | |
| 23 | PA0 | DOT | I | DOT input | | |
| 24 | PA1 | DASH | I | Dash input | | |
| 25 | PA2 | SPEED VR | I/O | KEY VR data determine port | | |
| 26~29 | PA3~PA6 | | I | Unused | | |
| 30 | PA7 | int contro | O | Inhibit determine control signal | H | |
| 31~33 | PG0~PG2 | | I | Unused | | |
| 34 | TCMP | | I | Unconnected | | |
| 35 | PG4 | | I | Unused | | |
| 36 | PG5 | EBSY | I | Unused | | |
| 37 | PG6 | MBSY | I | Unused | | |
| 38 | PG7 | | I | Unused | | |
| 39~44 | PC0~PC5 | | I | Unused | | |
| 45 | IRQ2 | sleep | I | 14V voltage drop determine inhibit port | | |
| 46 | PC7 | | I | Unused | | |
| 47 | VDD | | I | | | |
| 48 | PD0 | | I | Unused | | |
| 49 | PD1 | mbusy | O | Message busy signal | | |
| 50 | PD2 | | I | Unused | | |
| 51 | PD3 | pbc | O | Beep output signal | | |
| 52 | PD4 | | I | Unused | | |
| 53 | PD5 | KEY | O | Key signal output | | |
| 54 | PD6 | | I | Unused | | |
| 55 | PD7 | | I | Unconnected | | |
| 56~59 | PE0~PE3 | | I | Unused | | |
| 60 | Vss | | I | | | |
| 61~64 | PE4~PE7 | | I | Unused | | |
| 65~72 | PH0~PH7 | | I | Unused | | |
| 73~76 | PJ0~PJ3 | | I | Unused | | |
| 77 | PB7 | WAKE UP | I | Wake up inhibit | | |
| 78~80 | PB6~PB4 | | I | Unused | | |

TS-870S

CIRCUIT DESCRIPTION

3) Extended I/O : CXD1095Q (Control unit IC16)

| Pin No. | Port name | Pin name | I/O | Function | Active level | Initial state |
|---------|-----------|---------------|-----|--|--------------|---------------|
| 1, 2 | NC | | | | | |
| 3~7 | PB1~PB5 | SHIMO1~SHIMO5 | I | Destination determine port | H | |
| 8 | PB6 | 50W | I | 50W switch signal | L | |
| 9 | PB7 | UNL | I | Unlock signal | H | |
| 10 | Vss | | I | | | |
| 11 | PC0 | ENF1 | O | Serial/parallel convert enable | H | L |
| 12 | PC1 | UDA23 | O | Serial/parallel convert data | | L |
| 13 | PC2 | UCK23 | O | Serial/parallel convert clock | | L |
| 14 | PC3 | NFMT | O | Control signal except FM transmit mode | L | H |
| 15, 16 | PC4, PC5 | VB3, VB2 | O | VCO band data | H | L |
| 17 | PC6 | VB1 | O | VCO band data | H | H |
| 18 | PC7 | VB0 | O | VCO band data | H | L |
| 19 | NC | | | | | |
| 20 | PD0 | PLE2 | O | VCO2 enable | H | L |
| 21 | PD1 | PLE1 | O | VCO1 enable | H | L |
| 22 | PD2 | PCK | O | PLL clock | | L |
| 23 | PD3 | PDA | O | PLL data | | L |
| 24 | PD4 | | O | Unused | | L |
| 25 | Vss | | I | | | |
| 26 | VDD | | I | | | |
| 27 | PD5 | DLE3 | O | DDS3 enable | H | L |
| 28 | PDA^ | DLE2 | O | DDS2 enable | H | L |
| 29 | PD7 | DLE1 | O | DDS1 enable | H | L |
| 30~32 | D0~D2 | | I/O | Bus | | |
| 33, 34 | NC | | | | | |
| 35~39 | D3~D7 | | I/O | Bus | | |
| 40 | CLR | | I | Port E output register clear | L | |
| 41 | ODEN | | I | Output disable | L | |
| 42 | Vss | | I | | | |
| 43 | WR | | I | Write signal | L | |
| 44 | RD | | I | Read signal | L | |
| 45 | CS | | I | Chip select signal | L | |
| 46~48 | A0~A2 | | I | Address signal | | |
| 49 | PE0 | P TTI | I | External AT TT input | H | |
| 50 | PE1 | P TSI | I | External AT TS input | H | |
| 51 | NC | | | | | |
| 52 | PE2 | MBSY | I | Electronic keyer busy signal | | |
| 53 | PE3 | | I | Unused | | |
| 54 | PA0 | P TTO | O | External AT TT output | H | L |
| 55 | PA1 | P TSO | O | External AT TS output | H | L |
| 56 | PA2 | | O | Unused | | L |
| 57 | Vss | | I | | | |
| 58 | VDD | | I | | | |
| 59~62 | PA3~PA6 | | O | Unused | | L |
| 63 | PA7 | LOGKEY | O | Electronic keyer reset | H | L |
| 64 | PBO | SHIMO0 | I | Destination determine port | H | |

TS-870S

CIRCUIT DESCRIPTION

4) Extended I/O : CXD1095Q (Control unit IC22)

| Pin No. | Port name | Pin name | I/O | Function | Active level | Initial state |
|---------|-----------|----------|-----|--|--------------|---------------|
| 1, 2 | NC | | | | | |
| 3~9 | PB1~PB7 | | I/O | DSP bus | | |
| 10 | Vss | | I | | | |
| 11 | PC0 | | I | Unused | | |
| 12 | PC1 | KEYS | I | Electronic keyer connecting determine signal | L | |
| 13 | PC2 | MD | I | Microphone UP switch signal | L | |
| 14 | PC3 | MU | I | Microphone DOWN switch signal | L | |
| 15 | PC4 | KEYI | I | Key input signal | L | |
| 16 | PC5 | PLUL | I | PLL unlock in DSP | L | |
| 17 | PC6 | EOM | I | DRU-3 EOM signal | H | |
| 18 | PC7 | VBSY | I | VS-2 busy signal | L | |
| 19 | NC | | | | | |
| 20 | PD0 | DRST | O | DSP reset signal Normally "H" | L | H |
| 21 | PD1 | VCEN | O | Electronic volume DAC enable | L | H |
| 22 | PD2 | UCK22 | O | Serial/parallel convert clock signal | | L |
| 23 | PD3 | UDA22 | O | Serial/parallel convert data signal | | L |
| 24 | PD4 | DREN | O | DRU-3 enable signal | L | H |
| 25 | Vss | | I | | | |
| 26 | VDD | | I | | | |
| 27 | PD5 | PLEN | O | PLL enable in DSP | H | L |
| 28 | PD6 | STR | O | VS-2 start signal | H | L |
| 29 | PD7 | | O | Unused | | L |
| 30~32 | D0~D2 | | I/O | Bus | | |
| 33, 34 | NC | | | | | |
| 35~39 | D3~D7 | | I/O | Bus | | |
| 40 | CLR | | I | Port E output register clear | L | |
| 41 | ODEN | | I | Output disable | L | |
| 42 | Vss | | I | | | |
| 43 | WR | | I | Write signal | L | |
| 44 | RD | | I | Read signal | L | |
| 45 | CS | | I | Chip select signal | L | |
| 46~48 | A0~A2 | | I | Address signal | | |
| 49 | PE0 | HENA | O | DSP enable A | L | H |
| 50 | PE1 | HENB | O | DSP enable B | L | H |
| 51 | NC | | | | | |
| 52 | PE2 | HRW | O | DSP R/W signal | | H |
| 53 | PE3 | | O | Unused | | L |
| 54~56 | PA0~PA2 | | O | DSP address signal | | L |
| 57 | Vss | | I | | | |
| 58 | VDD | | I | | | |
| 59 | PA3 | | O | Unused | | L |
| 60 | PA4 | P BEEP | O | Beep output signal | H | L |
| 61 | PA5 | P CKY | O | Transmit output control signal | H | L |
| 62 | PA6 | P RXC | O | Receive control signal | H | H |
| 63 | PA7 | P TXC | O | Transmit control signal | H | L |
| 64 | PB0 | | I/O | DSP bus | | |

TS-870S

CIRCUIT DESCRIPTION

5) Extended I/O : CXD1095Q (Control unit IC23)

| Pin No. | Port name | Pin name | I/O | Function | Active level | Initial state |
|---------|-----------|----------------|-----|---------------------------------------|--------------|---------------|
| 1, 2 | NC | | | | | |
| 3~9 | PB1~PB7 | P K1~P K7 | I | Key matrix input | L | |
| 10 | Vss | | I | | | |
| 11 | PC0 | 6KFIL | O | Analog filter select signal | H | L |
| 12 | PC1 | 3KFIL | O | Analog filter select signal | H | H |
| 13 | PC2 | 15KFIL | O | Analog filter select signal | H | L |
| 14~16 | PC3~PC5 | P ENR3~P ENR1 | O | RF serial/parallel convert enable | H | L |
| 17 | PC6 | P UDA21 | O | Serial/parallel convert data | | L |
| 18 | PC7 | P UCK21 | O | Serial/parallel convert clock | | L |
| 19 | NC | | | | | |
| 20~22 | PD0~PD2 | | O | Unused | | L |
| 23 | PD3 | P APRE | O | AT motor control signal | | L |
| 24 | PD4 | P PR22 | O | AT motor 2 control signal | | L |
| 25 | Vss | | I | | | |
| 26 | VDD | | I | | | |
| 27 | PD5 | P PR21 | O | AT motor 2 control signal | | L |
| 28 | PD6 | P PR12 | O | AT motor 1 control signal | | L |
| 29 | PD7 | P PR11 | O | AT motor 1 control signal | | L |
| 30~32 | D0~D2 | | I/O | Bus | | |
| 33, 34 | NC | | | | | |
| 35~39 | D3~D7 | | I/O | Bus | | |
| 40 | CLR | | I | Port E output register clear | L | |
| 41 | ODEN | | I | Output disable | L | |
| 42 | Vss | | I | | | |
| 43 | WR | | I | Write signal | L | |
| 44 | RD | | I | Read signal | L | |
| 45 | CS | | I | Chip select signal | L | |
| 46~48 | A0~A2 | | I | Address signal | | |
| 49 | PE0 | P THP | I | Thermal protection signal | H | |
| 50 | PE1 | P SS | I | Microphone PTT switch signal | L | |
| 51 | NC | | | | | |
| 52 | PE2 | | I | | | |
| 53 | PE3 | | O | Unused | | L |
| 54 | PA0 | P DIM | O | Dimmer control signal | H | H |
| 55, 56 | PA1, PA2 | P ENL3, P ENL2 | O | LCD driver enable signal | H | L |
| 57 | Vss | | I | | | |
| 58 | VDD | | I | | | |
| 59 | PA3 | P LATC | O | AT LED | H | L |
| 60, 61 | PA4, PA5 | P ENL1, P ENL4 | O | Switch serial/parallel convert enable | H | L |
| 62, 63 | PA6, PA7 | | O | Unused | | L |
| 64 | PB0 | P K0 | I | Key matrix input | L | |

CIRCUIT DESCRIPTION

TX-RX Unit (DSP Operation)

■ Outline

The TS-870S uses the DSP to carry out various processing as compared with the conventional models. They include the following:

- Modulation and demodulation
- Filter processing
- AGC processing (S-meter data output)
- Mic amplifier AGC processing
- VOX processing
- Voice equalizing processing
- Noise processing (noise reduction, beat cancel, automatic notch)
- Speech processing (COMP meter data output)
- Squelch processing
- Sidelobe and beep generation

The commands and data for the microprocessor are listed below (see page 42).

The TX-RX unit circuits are divided into the analog section that processes analog signals and digital section that processes digital data. The interface between the analog and digital sections is the analog-to-digital converter (IC25 : AK5340-VS) and digital to analog converter (IC16 and IC27 : AK4318-VS, IC34 : PCM69AU).

The unit has another digital to analog converter (IC26 : M62363FP) for VCA (electronic volume : M51131L) control. The volume is controlled directly by the microprocessor in the control unit (the volume is not controlled by the DSP).

■ Digital section

The digital section is explained below. Figure 17 is a digital section block diagram.

The digital section consists of two DSPs (IC1 and IC2 : DSP56002FC40), RAM (IC7 : MCM56824AFN2*), three ROMs (IC4, IC5, IC6 : 27C256PCJJ**), and gate array (IC3 : MBCG24173-6173) and PLD (IC9 : 7032LC44JLQ*). The TX-RX unit has a PLL, but it is included in the digital section for convenience. * indicates the version number.

The PLL in the TX-RX unit is controlled directly by the microprocessor in the control unit, and clocks of a fixed frequency of 46.32MHz are generated. This circuit forms a VCO consisting of Q8 : 2SK210(GR), Q9 and Q10 : 2SC2714(Y). Q8 is an oscillator and Q9 and Q10 are buffer amplifiers. Q5, Q6, and Q7 comprise an active low-pass filter. This low-pass filter converts the output from PLL IC IC15 : MB86001PF to DC voltage and sends it to the VCO.

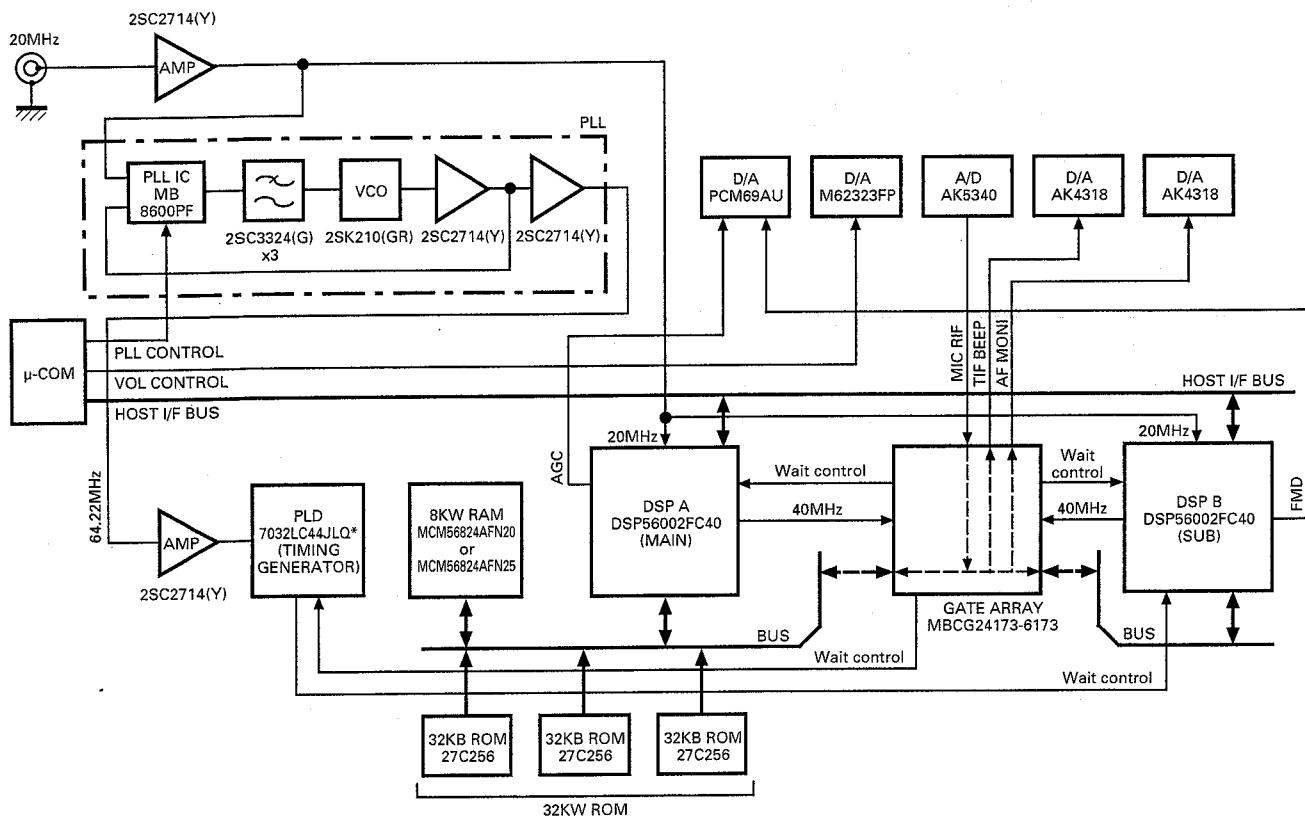


Fig. 17 Digital section block diagram

TS-870S

CIRCUIT DESCRIPTION

Figure 18 is a block diagram of the PLD (Programmable Logic Device). The clock with a sampling frequency f_s (45.234375kHz) is generated from the 46.32MHz clock produced by the PLL in the TX-RX unit by the clock divider in the PLD. This clock is used for data transmission and reception between the analog-to-digital and digital to analog converters and gate array and data transmission and reception between the gate array, DSP, and the analog to digital and digital to analog converters. The PLD forms part of the bus control circuit for sharing the RAM and ROM with two DSPs and the circuit that accesses the ROM.

The gate array is used as the interface between the analog to digital and digital to analog converters and the DSP. Data is received from the analog to digital converter, or transmitted to the digital to analog converter, and each DSP is interrupted in the $1/f_s$ sampling intervals. The gate array interfaces two DSPs for communication, and the two other DSPs control the bus for sharing the RAM and ROM.

The DSP has a 24 bit fixed-decimal DSP. It operates with the 40MHz clock, but the external 20MHz clock is given to the DSP. The DSP operates the 40MHz clock generated in the PLL in the IC. The clock is programmed to be output to pin 123 (CKOUT) of the DSP. Transfer of commands with the microprocessor is carried out through the host interface of the DSP.

The ROM and RAM are shared by two DSPs. When one of the DSPs is being accessed, the other DSP waits. It is carried out by the gate array and PLD. Three 8 bit ROMs are used to implement 24 bits.

The analog to digital converter (IC25 : AK5340-VS) is an 18 bit Δ - Σ type ADC for audio equipment. There are two channels, R and L. The R channel is used for the receive signal and the L channel is used for the microphone input signal. The digital to analog converter (IC16 and IC27 : AK4318-VS) is a 18 bit Δ - Σ type DAC for audio equipment. The digital to analog converter has two channels like the analog to digital converter : IC16 uses the R channel for the beep signal and the L channel for the transmit signal, and IC27 uses the R channel for the monitor signal and the L channel for the decode signal. Another digital to analog converter (IC34 : PCM69AU) is an 18 bit DAC for audio equipment, and uses the Rch for AGC and the L channel for audio signals in FM.

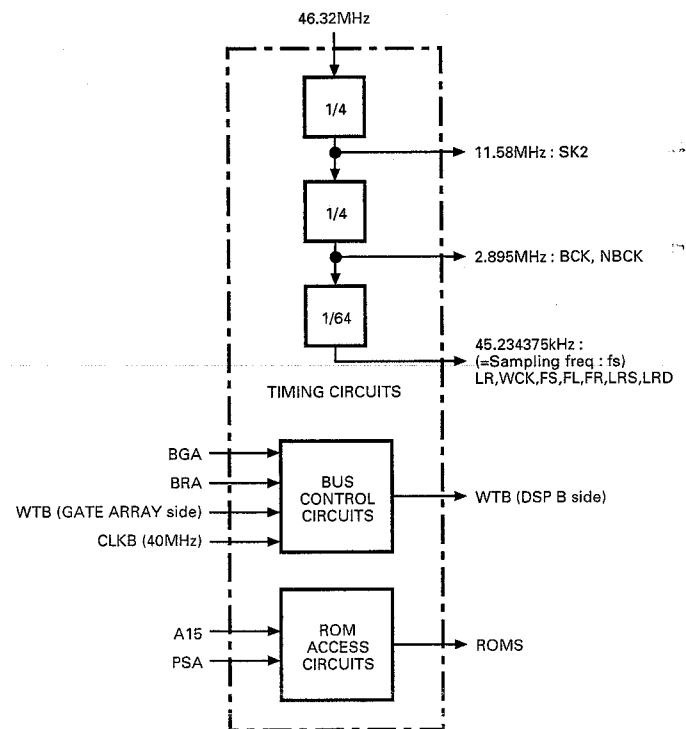


Fig. 18 PLD block diagram

■ Flow of transmit/receive signals

Flow of transmit/receive signals is explained below, together with the analog and digital sections. Flow of receive signals is explained first. See Figure 19.

The receive signal input from pin 3 (RIF) of CN1 is amplified by IC43 : NJM5532M. If a HIGH signal is input to RIF, its amplitude is limited to prevent any signal that exceeds the input range to the analog to digital converter (IC25 : AK5340-VS). The signal is passed through the band-pass filter and buffer amplifier, and its frequency is converted by the mixer (IC18 : MC74HC4053F). The frequency of the receive signal is about 1/4 of sampling frequency f_s . The $f_s/4$ frequency is the most stable frequency for digital signal processing. The receive signal of the $f_s/4$ frequency is passed through the buffer amplifier, amplified by amplifier IC21 : NJM4560M, and converted to digital data by the analog to digital converter (IC25).

TS-870S

CIRCUIT DESCRIPTION

This data is read into the gate array (IC3 : MBCG 241873-6173) in sampling intervals 1/fs. The data read into the gate array is fed to the DSP in 1/fs for processing. DSP A (IC1 : DSP56002FC40) carries out auto notching, demodulation, noise processing, and squelch processing, and DSP B carries out AGC and filter processing.

AGC data, one of the DSP B operation results, is sent to the digital to analog converter (IC34 : PCM69AU) from pin 33 of DSP B (IC2: DSP56002 FC40) in 1/fs intervals. AGC data is converted to an analog current by IC34, and converted to an analog voltage by the I-V converter IC35 : AD822AR, and is output to the RF unit as the AGC voltage. The AGC voltage is reversed by the reversing amplifier IC35 : AD822AR, and the S-meter voltage used for packet communication is generated and output from the SMET terminal of ACC2 (J5).

The digital data demodulated by two DSPs is sent to the gate array in 1/fs intervals. The data is sent to the digital to analog converter (IC27 : AK4318-VS) from pin 68 of the gate array in 1/fs intervals and converted to an analog signal. The demodulate signal converted to an analog signal is passed through the third low-pass filter IC28 : NJM2100M. This low-pass filter eliminates the alias components. The demodulate signal then enters the VCA (IC29 : M51131L). The VCA attenuates and outputs the demodulate signal according to the voltage given to pin 8 of IC29. The voltage at pin 8 is the voltage corresponding to the rotational angle of the AF VOL, and is controlled by the microprocessor in the control unit. The demodulate signal is passed through the VCA, amplified by the AF amplifier (IC33 : LA4422), and output to the speaker and headphone.

Demodulation data used for packet communication is passed through low-pass filter IC28 : NJM2100M, then attenuated by the VCA IC31 : M51131L. The attenuation amount is determined by the value set on the menu. The signal is passed through the VCA and ACC2 (J5) through the buffer amplifier Q17 : 2SC 2412K(S), and output to the TNC.

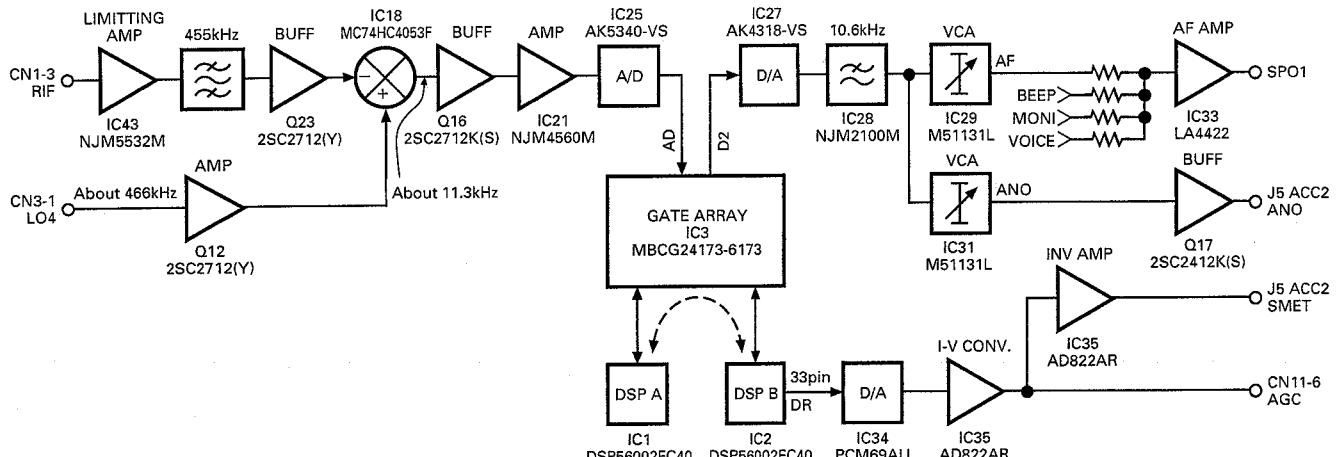


Fig. 19 Flow of receive signal

TS-870S

CIRCUIT DESCRIPTION

Then, flow of transmit signals is explained below. See Figure 20. If the mode is SSB, FM, or AM, the signal from the microphone is input. The signal enters the TX-RX unit through CN4. The signal is amplified by amplifier IC22 : AD822AR, and goes to the multiplexer (IC23 : MC74HC4052F). The multiplexer is used to switch between the microphone signal, the play signal from the DRU-3 (option), and packet signal. The signal passing through the multiplexer is amplified by amplifier IC24 : NJM2100M, and converted to digital data by the analog to digital converter (IC25 : AK5340-VS). The data is read into the two DSPs in the same way as for the receive signal. In transmit mode, DSP A carries out modulation, speech processing, and carrier signal generation in CW, FSK, and FM modes, while DSP B carries out VOX processing, voice equalizing processing, preemphasis processing (in FM mode), and microphone amplifier AGC processing.

The DSP does not perform modulation in FM mode. The DSP sends a 455kHz carrier signal from pin 1 (TIF) of CN1, adds subtone to the carrier signal, preemphasizes sounds, and limits the amplitude. Preemphasized audio data is sent from pin 33 of DSP A (IC1 : DSP56002FC40) to the digital-to-analog converter (IC34 : PCM69AU) in 1/fs intervals, and converted to an analog current. The analog current is converted to the audio signal of the analog voltage by the I-V converter IC36 : NJM4560M. IC36 also serves as

the third low-pass filter that eliminates the alias components of the audio signal. The analog audio data signal is output from pin 3 (FMD) of CN3 to the PLL section.

The data modulated by the two DSPs (including FM carrier data) is sent to the gate array in the process as the demodulated signal. The signal is sent from pin 60 of the gate array to the digital to analog converter (IC16 : AK4318-VS) in 1/fs intervals, and converted to an analog signal. The frequency of this signal is fs/4. The analog modulated signal is passed through the third low-pass filter IC17 : NJM2100M to eliminate alias components. The signal is converted to the 455kHz IF signal by the mixer (IC18 : MC74HC4053F) and two ceramic filters (CF2 and CF3), and output from pin 1 (TIF) of CN1.

Monitor data, one of the DSP operation results, is sent to the gate array in the same process as the demodulate signal. Like the demodulate signal, the signal is sent from pin 68 of the gate array to the digital to analog converter (IC27 : AK4318-VS), and converted to an analog signal. The analog sidetone signal is passed through the third low-pass filter IC30 : NJM2100M and attenuated by VCA (IC31 : M51131L). The attenuation is determined by the rotational angle of MONI VOL. The flow of the signal after passing through the VCA is the same as for the demodulate signal.

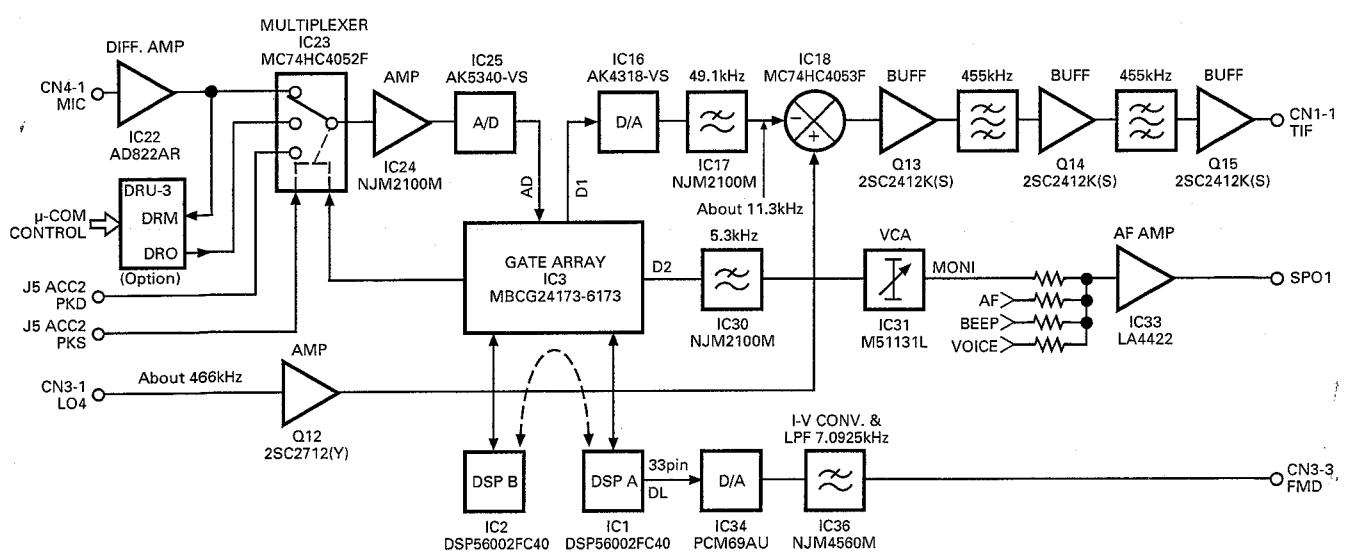


Fig. 20 Flow of transmit signal

TS-870S

CIRCUIT DESCRIPTION

Sidetone signal flow

When the electronic keyer is pressed, the sidetone is output. The sidetone is processed by DSP A. Sidetone data, a DSP A operation result, is output to the speaker or headphone in the same process as the monitor data. See Figure 21.

FSK tone signal flow

The flow of the FSK tone signal is the same as that of the sidetone. See Figure 21.

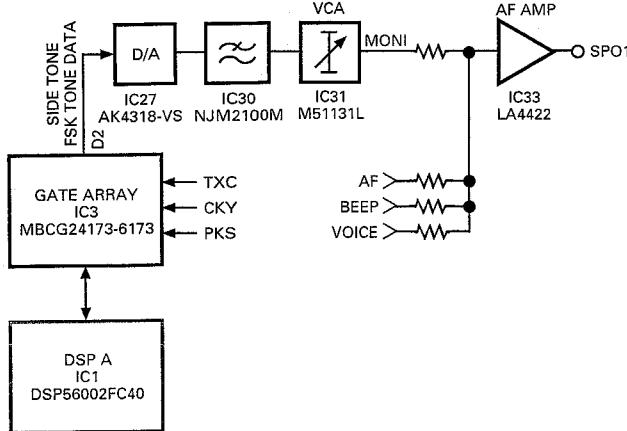


Fig. 21 Sidetone and FSK tone signal flow

Beep signal flow

When pin 6 (BEEP) of CN7 goes HIGH, DSP A sends beep data to the gate array in the same process as the demodulate signal. Like modulation data, the signal is sent from pin 60 of the gate array to the digital to analog converter (IC16 : AK4318-VS) in $1/f_s$ intervals, and converted to an analog signal. The analog beep signal is passed through the primary low-pass filter IC19 : NJM4560M, and attenuated by VCA (IC29 : M51131L). The attenuation is determined by the value set on the menu. The flow of the signal after passing through the VCA is the same as for the demodulate signal.

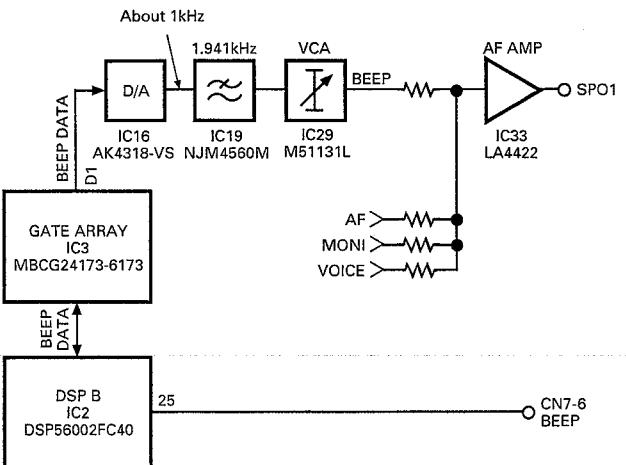


Fig. 22 Beep signal flow

DRU-3 recording and playback

The DRU-3 is controlled by the microprocessor in the control unit. During the DRU-3 recording, the MIC signal amplified by the differential amplifier (IC22 : AD822AR) is input to the DRU-3, and recorded. During DRU-3 playback, the playback signal is input to the analog-to-digital converter by switching the multiplexer (IC23 : MC74HC4052F). When the DSP receives a command "VOX ON and DRU playback" from the microcomputer, pin 38 of DSP B (IC2 : DSP56002FC40) goes HIGH and the SS line goes LOW. When the SS line goes LOW, the microprocessor sets the transceiver to transmit mode. This operation does not occur at the playback sound level of the DRU-3. Even if no sound is recorded, the transceiver enters the transmit mode when a DRU playback command arrives while VOX is ON. See Figure 20.

VS-2 audio signal flow

The audio signal output from the VS-2 is not processed by the DSP. The signal is amplified by the AF amplifier, and output to the speaker or headphone. The VS-2 is controlled by the microprocessor. See Figure 23.

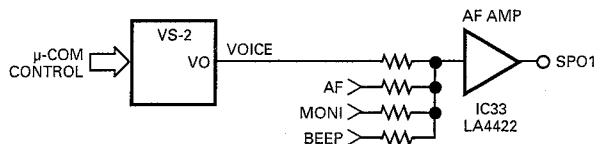


Fig. 23 VS-2 audio signal flow

TS-870S

CIRCUIT DESCRIPTION

■ Commands and data transferred to or from the microprocessor

To understand the DSP processing, the commands sent from the microcomputer to the DSP, and data sent from the DSP to the microcomputer are described below.

For details of error status, see the error list (Table 10).

1) Microprocessor → DSP

- Transmit mode
- Transmit filter
- CW rise (fall) time
- FSK shift width
- Squelch level
- Applicable filter follow speed
- SPAC interrelation time
- Check mode operation setting
- VOX delay time
- AGC release time
- TX AGC release time
- AGC correction
- TX equalizing
- FM modulation
- Processor compression level (LOW)
- Processor compression level (MID)
- Processor compression level (HIGH)
- RX AF AGC gain (AM/FM)
- RX AF AGC gain release time (AM/FM)
- TX AGC gain (packet input)
- Receive mode
- Receive filter
- CW pitch frequency
- FM subtone frequency
- Noise/interference elimination mode setting
- Auto notch follow speed
- Operation flag 1
- VOX gain
- RF gain (AGC)
- TX AGC gain
- AM modulation
- Carrier level
- Operation flag 2

2) DSP → Microprocessor

- S-meter data
- Compression level data
- Squelch status
- Microphone level data
- Error status
- Check mode status

| Error No. | Error description |
|-----------|---|
| 00 | TX-RX unit is not connected. |
| 01 | Main DSP stack error |
| 02 | Main DSP trace error |
| 03 | Main DSP software interrupt |
| 04 | Main DSP SSI reception |
| 05 | Main DSP SSI exceptional reception |
| 06 | Main DSP SCI reception |
| 07 | Main DSP SCI exceptional reception |
| 08 | Main DSP SCI transmission |
| 09 | Main DSP SCI line idle detection |
| 0A | Main DSP NMI |
| 0B | Main DSP invalid command detection |
| 0C | Command cannot be transferred from the main DSP to the sub DSP. |
| 10 | RAM check error 1 |
| 11 | RAM check error 2 |
| 12 | Gate array check error |
| 21 | Sub DSP stack error |
| 22 | Sub DSP trace error |
| 23 | Sub DSP software interrupt |
| 24 | Sub DSP SSI reception |
| 25 | Sub DSP SSI exceptional reception |
| 26 | Sub DSP SCI reception |
| 27 | Sub DSP SCI exceptional reception |
| 28 | Sub DSP SCI transmission |
| 29 | Sub DSP SCI line idle detection |
| 2A | Sub DSP NMI |
| 2B | Reserved |
| 2C | Reserved |
| 2D | Sub DSP invalid command detection |
| 2E | Reserved |
| F0 | Main DSP timeover error |
| F1 | Sub DSP timeover error |
| FD | PLL unlock (TX-RX unit) |
| FE | PLL unlock (RF unit PLL section) |
| FF | Temperature protection error |

Table 10 Error list

CIRCUIT DESCRIPTION

■ New function circuit

The TS-870S noise processing, auto notch, line enhancer, SPAC, and beat cancel functions are characteristics of the DSP digital signal processing. These functions and other features are described below.

1) Auto notch

The auto notch corresponds to the IF filter used in the previous models. It is an adaptive filter, and emphasizes weak signals by tracking interfering signals automatically in the AGC loop (the reception gain increases). The notch filter has very good damping and frequency characteristics in the receiving bandwidth.

2) Beat cancel

The "beat cancel" corresponds to the AF filter used in the previous models. It also is an adaptive filter, and finds and removes beat components from the received signal. Unlike the notch filter, this filter removes multiple beats, but it does not emphasize weak signals even if the beat is canceled.

3) Noise reduction

The TS-870S uses a line enhancer or SPAC to reduce noise. One of these two functions should be assigned to the N.R. key on the front panel.

The line enhancer is an adaptive filter which does not attenuate the target signal, but attenuates only noise. If the conditions are not very bad, the S/N ratio can be improved greatly.

Select SPAC to improve the S/N ratio effectively. SPAC stands for "Speech Processing System by use of Auto Correlation function." It takes the periodical signal (target reception signal) and suppresses noise using the Auto Correlation function. Since SPAC takes reception signals with a certain time width, the signals become discontinuous and cause noise.

Since the auto notch, beat cancel, and line enhancer are adaptive filters, their characteristics change according to the input signal. If the automatic tracking is set to OFF on the menu when the filter effect is good under good signal conditions, the effect does not change even if the conditions turn bad.

4) VOX

DSP processes the correlation between the received signal and signal from the microphone, and carries out the conventional anti-VOX processing. Therefore, TS-870S does not have anti-VOX.

5) SSB modulation/demodulation

TS-870S uses the PSN modulation/demodulation used for TS-950 and subsequent models. With the increase in the DSP operation precision, the side-band suppression has been improved in a very wide bandwidth from 25Hz to 6kHz (80dB or more for modulation and 90dB for demodulation). The PSN method does not eliminate all group-delay distortion because the Hilbert converter uses an IIR filter. The TS-870S uses a linear phase shifter with a Hilbert converter containing an FIR filter. As the FIR filter can keep group delay constant, it does not cause group-delay distortion. However, as the group-delay itself increases, if the linear phase shifter is set to ON via the menu, a signal is transmitted several ms after a voice enters the microphone.

■ Analog section and other circuits

The analog section and other circuits were described in the flow of transmission and reception signals. This section describes the circuits that were not explained in the flow of transmission and reception signals.

1) Reference voltage circuit

Since TS-870S does not have a negative power supply, a 2.5V reference voltage, which is half the power supply voltage, is supplied to the OP amplifier to process analog signals linearly. Fig. 24 shows this circuit. 2.5V are produced by dividing the power supply voltage by R129 and R132. This voltage is provided to the circuitry through buffer amplifier IC19 or IC20.

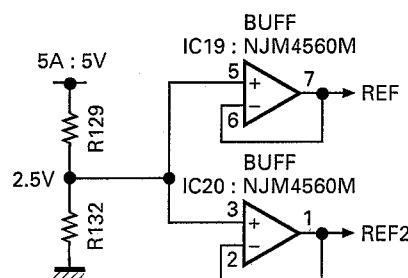


Fig. 24 Reference voltage circuit


TS-870S

CIRCUIT DESCRIPTION

2) Pop mute circuit

The mute circuit shown in Fig. 25 reduces the pop sound when the power is switched ON and OFF. If CN7 pin 16 AMUT is LOW, the mute circuit consisting of IC44 : TC7S04F and Q22 : DTC124EK mutes the AF amplifier (IC33 : LA4422) and suppresses the pop sound when the power is turned ON. A microprocessor controls AMUT and cancels muting at an appropriate time.

When the power is turned OFF, muting is also controlled by AMUT, but is done only if the power switch ON TS-870S is pressed. The circuit comprising Q25 : DTA143EK, Q26 : DTC124XK, and Q27 : DTC143EK suppresses the pop sound when the external power supply switch is turned OFF. When this switch is turned OFF, the voltage of the AF amplifier power supply 14A decreases. When the 14A voltage falls, Q25 becomes active (ON), and then Q26 becomes active (the collector goes LOW to mute the AF amplifier and suppress the pop sound. Q27 prevents muting when the voltage of the AF amplifier power supply 14A falls during transmission.

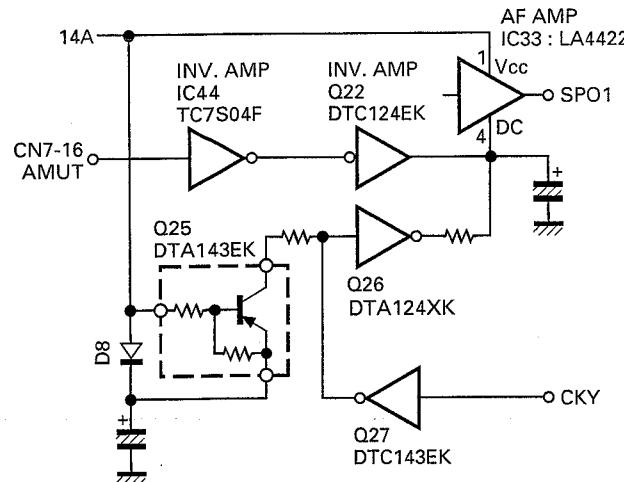

The TS-870S uses AF amplifier IC33: LA4422 pin 4 (DC) as the mute pin.

Fig. 25 Pop mute circuit

■ Transmit/receive frequency characteristics correction circuit


The transmission sound quality has a flat frequency characteristic due to DSP modulation. However, the low-frequency range is also flat to the cut-off frequency, so the model has less clarity compared to the conventional transceivers. A correction circuit is provided to suppress the low-frequency range. It consists of R141, R155, and C145 in the TX-RX unit, and it is -2dB at 300Hz for 1kHz.

To return to the flat frequency characteristic, remove C145 and replace R155 with a 1.8kΩ resistor. (See Figure 26.)

The receive frequency is also flat, as well as the hi-fi sound quality when the filter is widened. When the receive frequency is flat, the volume of the low-frequency range becomes insufficient, so a correction circuit that slightly emphasizes the low-frequency range is provided. It consists of R204, R205, R208, and C208 in the TX-RX unit, and it is +2dB at 1kHz for 3kHz.

To return to the flat frequency characteristic, remove R205. (See Figure 26.)

Transmit side

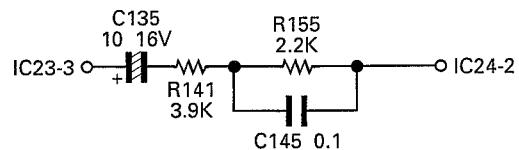

Receive side

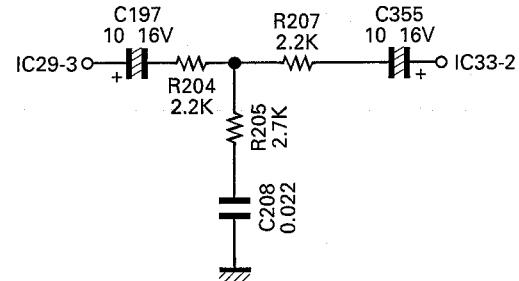


Fig. 26 Transmit/receive frequency characteristics correction circuit

DESCRIPTION OF COMPONENTS

RF UNIT (X44-3210-00) (A/9) : RF

| Ref. No. | Use/Function | Operation/Condition |
|----------|----------------------------|--|
| Q1 | Switching | On when exit RX on. |
| Q2 | Switching | On when TX. |
| Q3 | Switching | Off when ATT1 or ATT2 on. |
| Q5 | TX RF amplifier | Drive output (TX frequency) |
| Q6 | Switching | DATT on |
| Q7 | Switching | 1/2 : 30kHz~490kHz 2/2 : 490kHz~1.62MHz |
| Q8 | Switching | 1/2 : 1.62MHz~2.49MHz 2/2 : 2.49MHz~3.99MHz |
| Q9 | Switching | 1/2 : 3.99MHz~6.99MHz 2/2 : 7.30MHz~10.49MHz |
| Q10 | Switching | 1/2 : 6.99MHz~7.30MHz 2/2 : 13.99MHz~14.49MHz |
| Q11 | Switching | 1/2 : 20.99MHz~21.49MHz 2/2 : 21.49MHz~30.00MHz |
| Q12 | Switching | 1/2 : 14.49MHz~20.99MHz 2/2 : 10.49MHz~13.99MHz |
| Q13 | RF amplifier | 21.49MHz~30.00MHz |
| Q14, 15 | RF amplifier | 30kHz~21.49MHz |
| Q16 | Amplifier | LO1 : 73.08MHz~103.05MHz |
| Q17~20 | Mixer | f _{LO1} - f _{RF} = 73.05MHz |
| Q21 | Ripple filter | 14S |
| Q22 | Amplifier | 73.05MHz |
| Q23 | Mixer | 73.05MHz - 64.22MHz = 8.83MHz |
| Q24 | Amplifier/AGC | 73.05MHz |
| Q26, 27 | Mixer | 73.05MHz - 64.22MHz = 8.83MHz |
| Q28 | Amplifier | 8.83MHz |
| Q29~31 | Amplifier/AGC | 8.83MHz |
| Q32 | AGC | NB (Noise blanker) |
| Q33 | Amplifier/AGC | 8.83MHz |
| Q35, 36 | Mixer | 73.05MHz → TX f |
| Q37, 38 | Mixer | 8.83MHz → 73.05MHz |
| Q39 | Amplifier | TX IF |
| Q42 | Switching | RF blanking |
| Q43, 44 | DC amplifier | ALC |
| Q45, 46 | Switching | On when AM mode. |
| Q47 | DC amplifier | ALC |
| Q48 | Switching | On when AM transmission mode. |
| Q49 | Switching | |
| Q50 | DC amplifier | ALC amplifier |
| Q51 | Switching | Pulse generate when AM transmission mode. |
| Q52 | DC amplifier | ALC amplifier |
| Q54 | Switching | Off when NB. |
| Q55 | Switching | Make relay for linear. |
| Q56 | Switching | On when TX. |
| Q57, 59 | Switching | TXB generate |
| Q58, 60 | Switching | RXB generate |
| Q61 | Switching | On when AIP off (0~21.49MHz). |
| Q62 | Switching | On when AIP off (21.49~30MHz). |
| Q63 | Switching | On when AIP off. |
| Q64 | Switching | On when AIP on. |
| Q65 | Switching | 12V when RX. |
| Q66 | Switching | On when RX. |
| Q70, 71 | Switching | CKY |
| IC1 | Serial/Parallel conversion | BPF selection |
| IC2 | Serial/Parallel conversion | |
| IC6 | OP amplifier | ALC meter |
| IC7 | DAC | 8 ch |
| IC8 | Meter amplifier | VSF, VSR, ALC and Processor. |

TS-870S

DESCRIPTION OF COMPONENTS

| Ref. No. | Use/Function | Operation/Condition |
|------------|----------------------------|--|
| IC9 | Comparator | NB pulse |
| IC10 | AVR | 8V → 5V |
| D1~3 | Relay surge absorption | |
| D4~7 | Large input protection | |
| D8 | RF switch | On when RX. |
| D10 | RF switch | On when TX. |
| D11~33, 35 | RF switch | BPF switch |
| D36, 37 | RF switch | On when AIP on. |
| D38, 39 | RF switch | ON when 21.49MHz or more RF amplifier selection. |
| D40, 41 | RF switch | On when 21.50MHz or less RF amplifier selection. |
| D42 | RF switch | |
| D43 | RF switch | LC2 (64.22MHz) switch |
| D46 | RF switch | Noise detection |
| D47 | RF switch | TGC voltage control |
| D49 | RF switch | Gain control |
| D50 | Zener diode | -6.2V stability |
| D51 | LED | Voltage generate |
| D52 | Zener diode | 12V (ALC voltage for linear) |
| D53 | Switch | Pulse generate |
| D54 | Reverse current prevention | |
| D55 | Zener diode | 3V (Voltage shift) |
| D56 | Switch | ALC |
| D57 | LED | CKY |
| D58 | Relay surge absorption | |
| D59 | Reverse current prevention | RBK |
| D60 | RF switch | On when 29MHz. |
| D61 | RF switch | On when AIP on. |
| D62 | RF switch | On when RX. |
| D63, 64 | RF switch | 8.83MHz filter changeover (15kHz). |
| D65, 66 | RF switch | 8.83MHz filter changeover (3kHz). |
| D67 | RF switch | 8.83MHz filter changeover (6kHz). |
| D68 | RF switch | On when TX. |
| D69 | RF switch | 8.83MHz filter changeover (6kHz). |
| D70 | Zener diode | 6.2V (Voltage shift) |
| D71 | Zener diode | 4.7V (Voltage stability) |
| D72 | Switch | CKY |

RF UNIT (X44-3210-00) (B/9) : PLL

| Ref. No. | Use/Function | Operation/Condition |
|-----------|--------------------------|------------------------------|
| Q500 | Buffer | D/A buffer |
| Q501 | Amplifier | 20MHz (fSTD) |
| Q502 | Mixer IC506 input buffer | 5.46~4.46MHz |
| Q503 | Buffer | D/A buffer |
| Q504, 505 | Switching | Chopper |
| Q506 | Buffer | Output for chopper |
| Q507 | Amplifier | LO3 (8.375MHz) |
| Q508 | Buffer | For LO3 output |
| Q510 | Buffer | D/A buffer |
| Q511 | Buffer | For LO4 output |
| Q512 | Amplifier | REF 20MHz |
| Q513 | Tripled circuit | f _{SDT} × 3 = 60MHz |
| Q514, 515 | Buffer | Reference oscillator 20MHz |
| Q516 | VCO A changeover | |
| Q517 | VCO B changeover | |

DESCRIPTION OF COMPONENTS

| Ref. No. | Use/Function | Operation/Condition |
|-----------|----------------------------|--|
| Q518 | VCO C changeover | |
| Q519 | VCO D changeover | |
| Q520 | VCO A | 73.08~80.54MHz |
| Q521 | VCO B | 80.54~87.54MHz |
| Q522 | VCO C | 87.54~94.54MHz |
| Q523 | VCO D | 94.54~103.05MHz |
| Q524 | Buffer | VCO A~VCO D output (73.08~103.05MHz) |
| Q525 | Mixer IC508 input buffer | 73.08~103.05MHz |
| Q526 | Buffer | For LO1 output |
| Q527 | Active LPF | Comparison 1MHz |
| Q528, 529 | Active LPF | |
| Q530 | Amplifier | PLL IC IC507 input (18~48MHz) |
| Q531 | Amplifier | 18~48MHz |
| Q532 | Amplifier | LO2A output (64.22MHz) |
| Q533 | Switching | PLL unlock signal output ("H" : Unlock) |
| Q534~536 | Active LPF | Comparison 20kHz (5kHz in FM mode) |
| Q537 | Switching | FM modulation input on/off |
| Q539 | Buffer | For LO2A output |
| Q800 | Reference oscillator | Reference frequency 20MHz oscillation. |
| IC500 | DDS | 1.46~0.46MHz for LO1 |
| IC501 | DDS | 1.625MHz for LO3 |
| IC502 | DDS | For LO4 |
| IC503 | Divider | 20MHz x (1/5) = 4MHz |
| IC505 | Mixer | 1.46~0.46MHz → 5.46~4.46MHz |
| IC506 | Mixer | 5.46~4.46MHz → 54.54~55.54MHz |
| IC507 | PLL | 2~5 : Frequency division ratio input 6 : 18~48MHz input 9 : Lock voltage output 11 : Unlock output (Unlock : "L") 15 : 20MHz input |
| IC508 | Mixer | 73.05~103.05 + 54.54~55.54 = 18~48MHz |
| IC509 | PLL | 2~5 : Frequency division ratio input 6 : 64.22MHz input 9 : Lock voltage output 11 : Unlock output (Unlock : "L") 15 : 20MHz input |
| IC510 | AVR | 13.8V → +9V |
| IC511 | AVR | 13.8V → +9V low drop-out |
| D500 | Vari-cap diode | VCO A |
| D501 | Switching | VCO A output |
| D502 | Vari-cap diode | VCO B |
| D503 | Switching | VCO B output |
| D504 | Vari-cap diode | VCO C |
| D505 | Switching | VCO C output |
| D506 | Vari-cap diode | VCO D |
| D507 | Switching | VCO D output |
| D508 | Reverse current prevention | Unlock signal detection |

FINAL UNIT (X45-351X-XX) (A/5) : FINAL 0-00 : K,P,M,M2,X 2-71 : E,E2,E3,E9

| Ref. No. | Use/Function | Operation/Condition |
|-----------|-------------------------------------|--|
| Q501 | Pre-drive amplifier | Wide-band amplification of HF band |
| Q502, 503 | Drive amplifier | Push-pull wide-band amplification of HF band |
| Q504 | Drive bias supply | Temperature compensation of drive |
| Q505, 506 | Final amplifier | Push-pull wide-band amplification of HF band |
| Q507 | Final bias supply | Temperature compensation of final |
| D501 | Temperature compensation | Temperature sensing of pre-drive |
| D502 | Temperature compensation | Temperature sensing of drive |
| D503 | Temperature compensation | Temperature sensing of final |
| D504 | Reverse power connection protection | |

TS-870S

DESCRIPTION OF COMPONENTS

FINAL UNIT (X45-351X-XX) (B/5) : FILTER

| Ref. No. | Use/Function | Operation/Condition |
|----------|------------------------------|------------------------------|
| Q1~5 | Relay driver | |
| Q6 | Switch | Antenna tuner through tune |
| Q10~16 | Relay driver | |
| IC1 | Band data decoder | |
| D1 | High-frequency rectification | Reflected wave rectification |
| D2 | High-frequency rectification | Forward wave rectification |
| D3 | Voltage stabilization | 5.1V |
| D4 | Relay surge absorption | 1.6~2.0MHz LPF relay |
| D5 | Relay surge absorption | 2.0~4.0MHz LPF relay |
| D6 | Relay surge absorption | 4.0~7.5MHz LPF relay |
| D7 | Relay surge absorption | 7.5~10.5MHz LPF relay |
| D8 | Relay surge absorption | 10.5~14.5MHz LPF relay |
| D9 | Relay surge absorption | 14.5~21.5MHz LPF relay |
| D10 | Relay surge absorption | 21.5~30.0MHz LPF relay |
| D11 | Switching | |

FINAL UNIT (X45-351X-XX) (C/5) : CONNECTION

| Ref. No. | Use/Function | Operation/Condition |
|-----------|----------------------------|---------------------|
| Q401~403 | DC/DC | -6V |
| Q404 | Ripple filter | 14S → 14V |
| Q405 | Ripple filter, AVR | |
| Q460, 461 | Mixer | RX |
| Q470, 471 | Mixer | TX |
| Q472, 475 | Amplifier | TX IF |
| IC402 | 5V AVR | 8V → 5V (For PLL) |
| D401 | Rectification | |
| D402 | Current stabilization | 9V |
| D450 | Reverse current prevention | |
| D451~456 | RF switch | BPF switch |
| D457 | Reverse current prevention | |

FINAL UNIT (X45-351X-XX) (D/5) : AVR

| Ref. No. | Use/Function | Operation/Condition |
|-----------|----------------------------|----------------------------------|
| Q601 | Switch | 14S supply when power switch on. |
| Q701 | Switch | On when fan operation |
| Q702, 703 | Switch | Fan motor drive |
| IC601 | 8V AVR | 13.8V → 8V (Analog 8V : 8A) |
| IC602 | 8V AVR | 13.8V → 8V (Digital 8V : 8D) |
| IC701 | Comparator | Fan control |
| D601 | Relay surge absorption | |
| D701 | Reverse current prevention | |
| D702 | Surge absorption | |




FINAL UNIT (X45-351X-XX) (E/5) : RELAY

| Ref. No. | Use/Function | Operation/Condition |
|----------|----------------------------|--------------------------|
| D301 | Lightning surge protection | ANT1 |
| D302 | Lightning surge protection | ANT2 |
| D303 | Relay surge absorption | Antenna changeover relay |
| D304 | Relay surge absorption | TX/RX changeover relay |

TS-870S

DESCRIPTION OF COMPONENTS

AT UNIT (X53-3340-02)
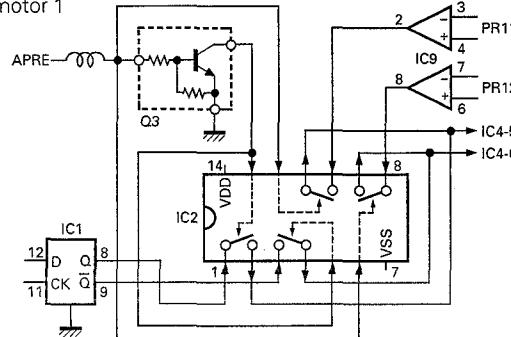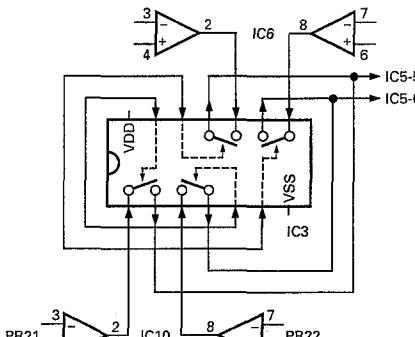
| Ref. No. | Use/Function | Operation/Condition | | | | | | | | | | | | | | | | |
|----------------|---------------|--|-----------------|--|--------|---------|-------|---|---|----|---|---|---|---|---|---|----------------|-----------------|
| Q1, 2 | Amplifier | Waveform shaping | | | | | | | | | | | | | | | | |
| Q3 | Switching | On when APRE is "H". | | | | | | | | | | | | | | | | |
| Q4, 5 | Switching | Motor speed control pulse | | | | | | | | | | | | | | | | |
| IC1 | DFF | Phase difference detection  <table border="1" style="margin-left: auto; margin-right: auto;"> <tr> <th colspan="2">Function table</th> </tr> <tr> <th>INPUTS</th> <th>OUTPUTS</th> </tr> <tr> <td>CLOCK</td> <td>D</td> <td>Q</td> <td>Q̄</td> </tr> <tr> <td>↑</td> <td>L</td> <td>L</td> <td>H</td> </tr> <tr> <td>L</td> <td>X</td> <td>Q₀</td> <td>Q̄₀</td> </tr> </table> | Function table | | INPUTS | OUTPUTS | CLOCK | D | Q | Q̄ | ↑ | L | L | H | L | X | Q ₀ | Q̄ ₀ |
| Function table | | | | | | | | | | | | | | | | | | |
| INPUTS | OUTPUTS | | | | | | | | | | | | | | | | | |
| CLOCK | D | Q | Q̄ | | | | | | | | | | | | | | | |
| ↑ | L | L | H | | | | | | | | | | | | | | | |
| L | X | Q ₀ | Q̄ ₀ | | | | | | | | | | | | | | | |
| IC2 | Analog switch | For control changeover motor 1  | | | | | | | | | | | | | | | | |
| IC3 | Analog switch | For control changeover motor 2  | | | | | | | | | | | | | | | | |
| IC4 | Motor drive | For motor 1 | | | | | | | | | | | | | | | | |
| IC5 | Motor drive | For motor 2 | | | | | | | | | | | | | | | | |
| IC6 | Comparator | Amplification difference detection | | | | | | | | | | | | | | | | |
| IC7 | AVR | +5V | | | | | | | | | | | | | | | | |
| D1 | Detector | Current component amplification detection | | | | | | | | | | | | | | | | |
| D2 | Detector | Voltage component amplification detection | | | | | | | | | | | | | | | | |
| D3~8 | Switching | Clipper | | | | | | | | | | | | | | | | |
| D10 | Switching | Spike absorption | | | | | | | | | | | | | | | | |
| D101~103 | Switching | Spike absorption | | | | | | | | | | | | | | | | |
| D105~108 | Switching | Spike absorption | | | | | | | | | | | | | | | | |
| D109, 110 | Switching | Band data | | | | | | | | | | | | | | | | |

TS-870S

DESCRIPTION OF COMPONENTS

CONTROL UNIT (X53-356X-XX) (A/4) : CONTROL

0-11 : K,P 0-21 : M 0-22 : M2 0-71 : X 2-71 : E 2-72 : E2 2-73 : E3 2-74 : E9

| Ref. No. | Use/Function | Operation/Condition |
|--------------|--------------------------------|--|
| Q1, 2 | Switching | Voltage drop changeover |
| Q3, 4 | Switching | Multiplexer changeover |
| Q5 | Switching | EEPROM write control changeover |
| Q6~11 | Switching | AT control (PR11, PR12, PR21, PR22, APRE, SPED) |
| Q12, 13 | Switching | AT-300 control and input (TS, TT) |
| Q14, 15 | Switching | AT-300 control and output (TS, TT) |
| Q16 | Switching | IC24 control (Reset) |
| Q17~19, 22 | Switching | IC24 control (CH1, 2, 3, 4) |
| Q20, 24 | Switching | IC24 control (DOT) |
| Q21, 23 | Switching | IC24 control (DASH) |
| Q27 | Switching | VBSY signal |
| Q28 | Switching | KEY signal |
| Q29 | Switching | Filter changeover (6kHz) |
| Q30 | Switching | Filter changeover (3kHz) |
| Q31 | Switching | Filter changeover (15kHz) |
| Q33 | Switching | BLNK signal |
| IC1, 2 | Regulator | 5V output |
| IC3 | Regulator | 8V output |
| IC4 | EEPROM | Adjustment data saving |
| IC5 | Reset, Power supply changeover | System reset and Back-up power supply changeover |
| IC6 | CPU | 8 bit microcomputer (Main) |
| IC7, 10 | Inverter | Reverse data |
| IC8 | RAM | 8K-byte |
| IC9, 13 | Multiplexer | A/D data changeover |
| IC11 | OR gate | RD/MR signal output |
| IC12 | ROM | 64K-byte |
| IC14 | AND gate | Chip select combination for RAM and ROM |
| IC15 | Bidirectional buffer | Data bus input/output changeover |
| IC16, 22, 23 | Extended I/O | 8 bit x 4, 4 bit x 1 |
| IC17, 18 | Decoder | Converts the address signal into a chip select signal for each IC. |
| IC19 | Latch | Chip select signal latch |
| IC20, 21 | Encoder gate array | Encoder pulse count |
| IC24 | CPU | 8 bit microcomputer (Electronic keyer) |
| IC25, 26 | Schmitt trigger | Encoder chattering absorption |
| IC27 | Level shift | RS-232 level shift |
| IC28 | OP amplifier | Buffer |
| IC29 | OR gate | CKY signal and BPC signal combination |
| D1~3 | Protection diode | Power supply |
| D4 | Voltage detector | Voltage drop detection (About 10V) |
| D5 | Protection diode | Reverse current prevention |
| D6 | Protection diode | KEYS line |
| D7 | Protection diode | DASH line |
| D8 | Protection diode | DOT line |
| D9 | Protection diode | MD line |
| D10 | Protection diode | MU line |
| D11 | Protection diode | KEY line |
| D12 | Protection diode | SS line |

TS-870S

DESCRIPTION OF COMPONENTS

CONTROL UNIT (X53-356X-XX) (B/4) : SW

| Ref. No. | Use/Function | Operation/Condition |
|-----------|-----------------|---|
| Q501, 502 | LED switch | |
| IC501~504 | Serial/Parallel | Data conversion for tact switch and LED |
| D501, 502 | LED | |
| D510~519 | LED | |

TX-RX UNIT (X57-4620-00)

| Ref. No. | Use/Function | Operation/Condition |
|----------|------------------------------|--|
| Q1 | Switch | Change SS line to low when VOX active. |
| Q2 | Amplifier | 64.22MHz |
| Q3 | Amplifier | REF 20MHz |
| Q4 | Switch | On/Off when squelch open/close (For packet). |
| Q5, 7 | Active LPF | |
| Q6 | Active LPF | PLL loop filter |
| Q8 | VCO | 46.32MHz oscillation circuit |
| Q9, 10 | VCO | Output buffer |
| Q12 | Amplifier | LO4 466kHz |
| Q13, 15 | Buffer | TX IF 455kHz |
| Q14 | Amplifier | TX IF 455kHz |
| Q16 | Buffer | Receive signal for DSP processing (11.3kHz) |
| Q17 | Buffer | ACC2 audio output |
| Q22 | Switch | Mute signal (Power on/off) |
| Q23 | Buffer | RX IF 455kHz |
| Q25 | Pulse generator | AF mute |
| Q26 | Switch | Mute signal |
| Q27 | Switch | Mute signal absorption (Mute inhibit when TX) |
| IC1 | DSP A | Main DSP |
| IC2 | DSP B | Sub DSP |
| IC3 | Gate array | For interface |
| IC4 | DSP ROM | Low (D0~D7) 32KB |
| IC5 | DSP ROM | Mid (D8~D15) 32KB |
| IC6 | DSP ROM | High (D16~D23) 32KB |
| IC7 | DSP RAM | 8K word |
| IC9 | PLD | Timing generator |
| IC15 | PLL IC | 46.32MHz clock generation |
| IC16 | DAC | Rch : BEEP signal (About 1kHz) Lch : Transmission signal (11.3kHz) |
| IC17 | Active filter | TX (fc = 49.1kHz) 3rd LPF |
| IC18 | Mixer | RX : 455kHz → 11.3kHz TX : 11.3kHz → 455kHz |
| IC19 | Voltage follower, Active LPF | Reference voltage buffer, BEEP LPF (fc = 1.9kHz) |
| IC20 | Voltage follower | Reference voltage buffer |
| IC21 | LPF, Buffer | RX IF 11.3kHz |
| IC22 | Amplifier | Microphone amplifier, unbalanced/balanced modulation |
| IC23 | Multiplexer | MIC, DATA, DRU-3 changeover |
| IC24 | LPF, Buffer | TX microphone amplifier, unbalanced/balanced modulation |
| IC25 | ADC | Rch : Reception signal Lch : Microphone input signal |
| IC26 | DAC | VCA control |
| IC27 | DAC | Rch : Monitor signal Lch : De-modulation signal |
| IC28 | Active LPF | De-modulation signal (fc = 10.6kHz) |
| IC29 | VCA (Electronic volume) | De-modulation signal, BEEP |
| IC30 | Active LPF | Monitor signal (fc = 5.3kHz) |
| IC31 | VCA (Electronic volume) | Packet AF, monitor |
| IC33 | AF amplifier | Audio amplifier |

TS-870S


DESCRIPTION OF COMPONENTS

| Ref. No. | Use/Function | Operation/Condition |
|----------|----------------------------|---|
| IC34 | DAC | Rch : AGC signal Lch : FM modulation signal |
| IC35 | I-V converter, Inverter | AGC and S-meter voltage |
| IC36 | I-V converter, Active LPF | FM modulation signal (fc = 7.2kHz) |
| IC37 | AVR | 13.8V → Analog 5V |
| IC38 | AVR | Digital 8V → Digital 5V |
| IC39 | AVR | 13.8V → 5V for PLL |
| IC40 | AVR | 13.8V → 8V for PLL |
| IC41, 42 | Buffer | VCA control |
| IC43 | Clipper amplifier | RX IF 455kHz |
| IC44 | Inverter | Mute (Power on/off) |
| D1~4 | Reverse current prevention | |
| D5 | VCO bari-cap diode for DSP | 64.32MHz oscillation |
| D7, 8 | Reverse current prevention | |

SEMICONDUCTOR DATA

PLL : MB86001PF (RF Unit IC507, 509, TX-RX Unit IC15)

■ Terminal connection diagram

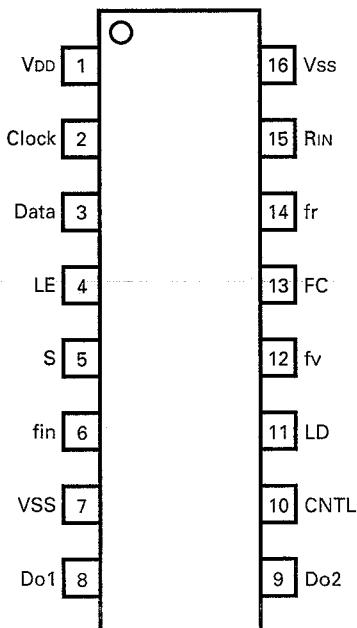

■ Terminal functions


| Pin No. | Pin code | I/O | Function |
|---------|----------|-----|---|
| 1 | VDD | - | Power supply pin. |
| 2 | Clock | I | Shift register clock input pin. Serial data is taken in at the rising edge of the clock signal. The input section contains a Schmitt trigger circuit. |
| 3 | Data | I | Serial data input pin for setting the divide ratio of each divider. The input section contains a Schmitt trigger circuit. |
| 4 | LE | I | Shift register load enable signal input pin. When LE is high, the divider ratio data is transferred to the latch specified by the control bit. This data is used as the divide ratio of each divider. The input section contains a Schmitt trigger circuit. |
| 5 | S | I | Switch pin for selecting the latch for setting the divide ratio of each divider. When the S pin is low, latch V1 is selected. When the S pin is high, latch V2 is selected. The divide ratio data is then sent to the divider. |
| 6 | fin | I | Divider input pin. The input section contains a bias circuit and an amplifier. Connect the voltage control oscillator (such as a VCO) by AC-coupling. |
| 7 | Vss | - | Ground pin. |
| 8 | Do1 | O | Phase comparator output pin (charge pump). The Do1 output level can be reversed by FC. The reference divider output fr and divider output fv are related as follows. On when CNTL is low. fr > fv : High level (FC : Low), Low level (FC : High), fr = fv : High impedance, fr < fv : Low level (FC : Low), High level (FC : High) |
| 9 | Do2 | O | Phase comparator output pin (charge pump). The relationships between the reference divider output fr and divider output fv are the same as for Do1. On when CNTL is high. |
| 10 | CNTL | I | Pin that controls charge pump outputs Do1 and Do2. The relationships between CNTL, Do1 and Do2 are as follows. When CNTL is low, Do1 : Output, Do2 : High impedance. When CNTL is high, Do1 : High impedance, Do2 : Output. |
| 11 | LD | O | Phase comparator output pin. When PLL is locked, LD is high. When PLL is unlocked, LD is low. |
| 12 | fv | O | Divider division output monitor pin. A signal is output from the pin in monitor mode. Normally, this pin has high impedance. |
| 13 | FC | I | Phase comparator input switch pin. |
| 14 | fr | O | Reference divider division output monitor pin. A signal is output from this pin in monitor mode. Normally, this pin has high impedance. |
| 15 | RIN | I | Reference divider input pin. The input section contains a bias circuit and an amplifier. Connect the reference oscillator (such as TCXO) by AC-coupling. |
| 16 | Vss | - | Ground pin. |

TS-870S


SEMICONDUCTOR DATA

Bidirectional buffer : TC74VHC245F (COntrol Unit IC15)

■ Terminal connection diagram

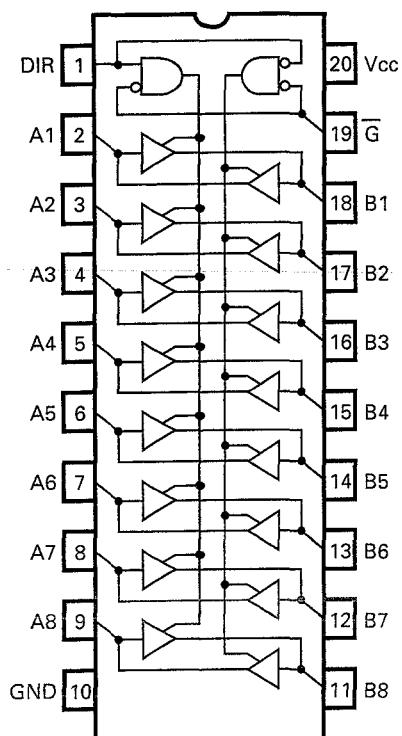

■ Logic diagram

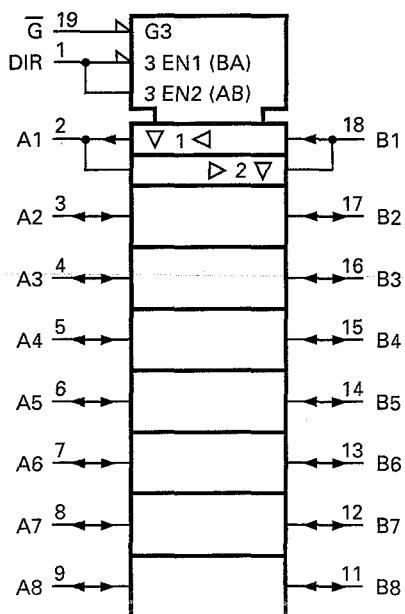

■ Truth table

| Input | | Function | | Output state |
|-----------|-----|----------------|--------|--------------|
| \bar{G} | DIR | A bus | B bus | |
| L | L | Output | Input | A=B |
| L | H | Input | Output | B=A |
| H | X | High impedance | Z | |



X : Don't Care Z : High impedance

SEMICONDUCTOR DATA

DC/AC Converter : AK4318-VS (TX-RX Unit IC16, 27)

■ Terminal connection diagram

■ Block diagram

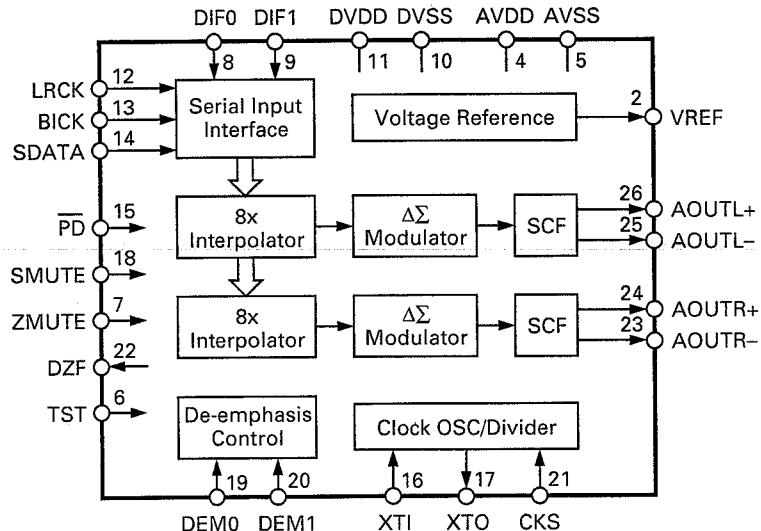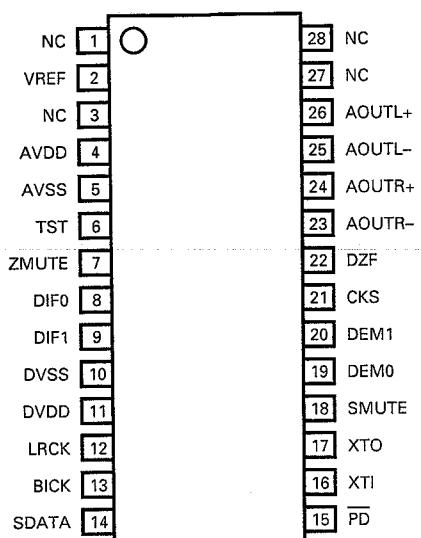

■ Terminal functions

| Pin No. | Pin name | I/O | Function |
|---------|------------|-----|--|
| 1 | NC | - | |
| 2 | VREF | O | Reference voltage output pin (AVDD) – 3.75V. The 10µF electrolytic capacitor and 0.1µF ceramic capacitor are connected between VREF and AVDD. |
| 3 | NC | - | |
| 4 | AVDD | - | Analog power supply pin (+5V). |
| 5 | AVSS | - | Analog ground pin. |
| 6 | TST | I | Test pin (pull down). Must be open or low. |
| 7 | ZMUTE | I | Zero mute pin (pull down). High : Detects zero and mutes output. |
| 8, 9 | DIFO, DIF1 | I | Input format pin. Supports four modes. |
| 10 | DVSS | - | Digital ground pin. |
| 11 | DVDD | - | Digital power supply pin (+5V). |
| 12 | LRCK | I | L/R clock pin. Determines the input serial data channel. |
| 13 | BICK | I | Serial bit clock pin. The clock latches serial data. |
| 14 | SDATA | I | Serial data input pin. Number two's complement MSB first. |
| 15 | PD | I | Reset pin. When this pin goes low, the filter and modulator are reset. Make this pin low to reset the filter and modulator when the power is turned on. |
| 16 | XTI | I | Clock input pin. Connect a crystal oscillator between XTI and XTO or input the external CMOS clock to XTI. The clock frequency can be selected with the CKS pin. |
| 17 | XTO | O | Crystal oscillator output pin. If the crystal oscillator is used, connect it between the XTO and XTI pins. If the external clock is used, open this pin. |
| 18 | SMUTE | I | Soft mute pin (pull down). High : Soft mute, Low : Cancel |
| 19, 20 | DEMO, DEM1 | I | De-emphasis mode pin. Supports three frequencies. |
| 21 | CKS | I | Clock select pin. Low : CLK 256 fs, High : CLK 384 fs |
| 22 | DZF | O | Zero input detection pin. High when the data input to the SDATA pin for both channels becomes zero 8192 times consecutively. |
| 23 | AOUTR- | O | Right-channel analog negative output pin. |
| 24 | AOUTR+ | O | Right-channel analog positive output pin. |
| 25 | AOUTL- | O | Left-channel analog negative output pin. |
| 26 | AOUTL+ | O | Left-channel analog positive output pin. |
| 27, 28 | NC | - | |



TS-870S

SEMICONDUCTOR DATA

AC/DC Converter : AK5340-VS (TX-RX Unit IC25)

■ Terminal connection diagram

■ Block diagram

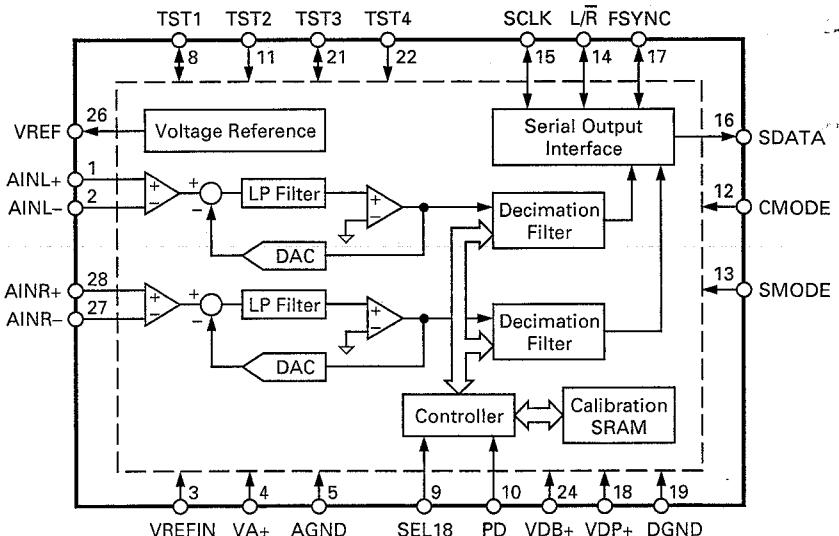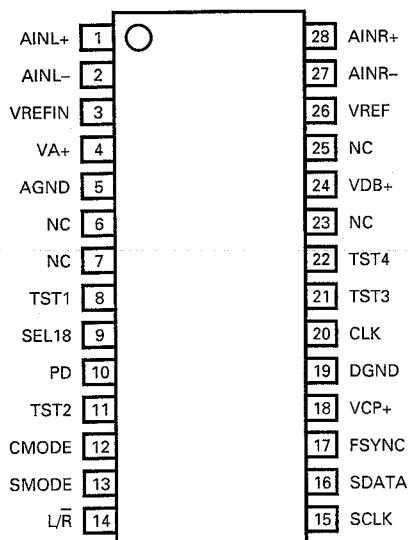

■ Terminal functions

| Pin No. | Pin name | I/O | Function |
|---------|------------|-----|--|
| 1 | AINL+ | I | Left-channel analog non-inverted input pin. |
| 2 | AINL- | I | Left-channel analog inverted input pin. |
| 3 | VREFIN | I | Reference voltage input pin. Normally connect to the VREF pin. The input range is 1.6 times the difference between VA+ and the voltage input to this pin. |
| 4 | VA+ | - | Analog section analog power supply pin (+5V). |
| 5 | AGND | - | Analog section analog ground pin. |
| 6, 7 | NC | - | |
| 8 | TST1 | - | Test pin. Open or connect to DGND. |
| 9 | SEL18 | I | Output data length select pin (with pull down resistor). Low : 16 bits, High : 18 bits |
| 10 | PD | I | Power down pin. High : Power down mode. Offset calibration starts at a falling edge. When the power is turned on or the clock frequency is changed, calibration must be carried out. |
| 11 | TST2 | - | Test pin. Open or connect to DGND. |
| 12 | CMODE | I | Master clock select pin. Low : CLK 256 fs (12.288MHz @fs : 48kHz), High : CLK 384 fs (18.432MHz @fs : 48kHz) |
| 13 | SMODE | I | Interface clock select pin. Set the input/output of each of the L/R, SCLK, and FSYNC clock pins. Low : Save mode (all input pins), High : Master mode (all output pins) |
| 14 | L/R | I/O | Input channel select pin. Slave mode : The fs clock is input. Lch MSB data is output at a rising edge and Rch MSB data is output at a falling edge of the clock signal. Master mode : The fs clock is output. SDATA is output one clock after the L/R edge. High when the power is down (PD : High). |
| 15 | SCLK | I/O | Serial data clock pin. One bit of data is output at a falling edge of the clock. Slave mode : Normally a 32 to 64 fs clock is input. Master mode : A 64 fs clock is output. Low when the power is down (PD : High). |
| 16 | SDATA | O | Serial data output pin. Data is number two's complement and the MSB is output first. Goes low after 16/18 bits are output. Low when the power is down (PD : High). |
| 17 | FSYNC | I/O | Frame synchronization clock pin. Slave mode : SDATA output is enabled when the pin is high. Master mode : The 2 fs clock is output. High when 16-bit data is output. The two low-order bits are low when 18-bit output is selected. Low when the power is down (PD : High). |
| 18 | VDP+ | - | Digital section power supply pin (+5V). |
| 19 | DGND | - | Digital section ground pin. |
| 20 | CLK | I | Master clock input pin. When CMODE is high, CLK : 384 fs. When CMODE is low, CLK : 256 fs. |
| 21, 22 | TST3, TST4 | - | Test pin. Open or connect to DGND. |


TS-870S

SEMICONDUCTOR DATA

| Pin No. | Pin name | I/O | Function |
|---------|----------|-----|---|
| 23 | NC | - | |
| 24 | VDB+ | - | Digital section power supply pin (+5V). (Silicon PCB potential) |
| 25 | NC | - | |
| 26 | VREF | O | Reference voltage output pin (VA+) – 2.6V. Output based on VA+. Normally connect this output to the VREFIN pin. |
| 27 | AINR- | I | Right-channel analog inverted output pin. |
| 28 | AINR+ | I | Right-channel analog non-inverted output pin. |

DC/AC Converter : PCM69AU (TX-RX Unit IC34)

■ Terminal connection diagram

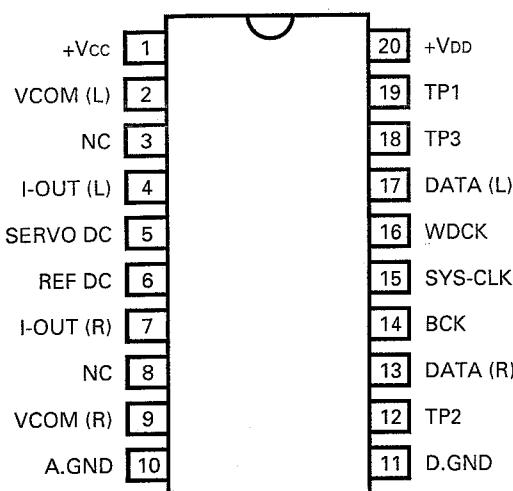

■ Terminal functions

| Pin No. | Pin name | Function |
|---------|-----------|-------------------------------|
| 1 | +VCC | Analog Positive power supply |
| 2 | VCOM (L) | Lch V common |
| 3 | NC | |
| 4 | I-OUT (L) | Lch current output |
| 5 | SERVO DC | Servo filter |
| 6 | REF DC | Reference filter |
| 7 | I-OUT (R) | Rch current output |
| 8 | NC | |
| 9 | VCOM (R) | Rch V common |
| 10 | A. GND | Analog common |
| 11 | D. GND | Digital common |
| 12 | TP2 | Test pin 2 |
| 13 | DATA (R) | Rch data input |
| 14 | BCK | Bit clock input |
| 15 | SYS-CLK | System clock input |
| 16 | WDCK | Word clock input |
| 17 | DATA (L) | Lch data input |
| 18 | TP3 | Test pin 3 |
| 19 | TP1 | Test pin 1 |
| 20 | +VDD | Digital positive power supply |


TS-870S

PARTS LIST

CAPACITORS


CC 45 TH 1H 220 J
1 2 3 4 5 6

1 = Type ... ceramic, electrolytic, etc.
2 = Shape ... round, square, ect.
3 = Temp. coefficient
4 = Voltage rating
5 = Value
6 = Tolerance



• Capacitor value

010 = 1pF
100 = 10pF
101 = 100pF
102 = 1000pF = 0.001μF
103 = 0.01μF



• Temperature coefficient

| 1st Word | C | L | P | R | S | T | U |
|----------|-------|-----|--------|--------|-------|------|--------|
| Color* | Black | Red | Orange | Yellow | Green | Blue | Violet |
| ppm/°C | 0 | -80 | -150 | -220 | -330 | -470 | -750 |

| 2nd Word | G | H | J | K | L |
|----------|-----|-----|------|------|------|
| ppm/°C | ±30 | ±60 | ±120 | ±250 | ±500 |

Example : CC45TH = -470 ± 60 ppm/°C

• Tolerance

| Code | C | D | G | J | K | M | X | Z | P | No code |
|------|-------|------|----|----|-----|-----|-----|-----|------|---------------------------|
| (%) | ±0.25 | ±0.5 | ±2 | ±5 | ±10 | ±20 | +40 | +80 | +100 | More than 10μF -10 ~ +50 |
| | | | | | | | -20 | -20 | -0 | Less than 4.7μF -10 ~ +75 |

Less than 10pF

| Code | B | C | D | F | G |
|------|------|-------|------|----|----|
| (pF) | ±0.1 | ±0.25 | ±0.5 | ±1 | ±2 |

• Voltage rating

| 2nd word | A | B | C | D | E | F | G | H | J | K | V |
|----------|------|------|------|------|------|------|------|------|------|------|----|
| 1st word | | | | | | | | | | | |
| 0 | 1.0 | 1.25 | 1.6 | 2.0 | 2.5 | 3.15 | 4.0 | 5.0 | 6.3 | 8.0 | - |
| 1 | 10 | 12.5 | 16 | 20 | 25 | 31.5 | 40 | 50 | 63 | 80 | 35 |
| 2 | 100 | 125 | 160 | 200 | 250 | 315 | 400 | 500 | 630 | 800 | - |
| 3 | 1000 | 1250 | 1600 | 2000 | 2500 | 3150 | 4000 | 5000 | 6300 | 8000 | - |

• Chip capacitors (Refer to the table above except dimension)

(EX) CC 73 E SL 1H 000 J
1 2 3 4 5 6 7

(Chip) (CH, RH, UJ, SL)

(EX) CK 73 E E 1H 000 Z
1 2 3 4 5 6 7

(Chip) (B, F)

RESISTORS

• Chip resistor (Carbon)

(EX) RD 73 E B 2B 000 J
1 2 3 4 5 6 7


(Chip) (B, F)

• Carbon resistor (Normal type)

(EX) RD 14 B B 2C 000 J
1 2 3 4 5 6 7

1 = Type ... ceramic, electrolytic, etc.
2 = Shape ... round, square, ect.
3 = Dimension
4 = Temp. coefficient
5 = Voltage rating
6 = Value
7 = Tolerance

Dimension



• Dimension (Chip capacitor)

| Dimension code | L | W | T |
|----------------|-----------|------------|----------------|
| Empty | 5.6 ± 0.5 | 5.0 ± 0.5 | Less than 2.0 |
| E | 3.2 ± 0.2 | 1.6 ± 0.2 | Less than 1.25 |
| F | 2.0 ± 0.3 | 1.25 ± 0.2 | Less than 1.25 |

• Dimension (Chip resistor)

| Dimension code | L | W | T | Wattage |
|----------------|-----------|------------|------|---------|
| E | 3.2 ± 0.2 | 1.6 ± 0.2 | 0.57 | 2B |
| F | 2.0 ± 0.3 | 1.25 ± 0.2 | 0.45 | 2A |

Rating wattage

| Code | Wattage | Code | Wattage | Code | Wattage |
|------|---------|------|---------|------|---------|
| 2A | 1/10W | 2E | 1/4W | 3A | 1W |
| 2B | 1/8W | 2H | 1/2W | 3D | 2W |
| 2C | 1/6W | | | | |

TS-870S

PARTS LIST

* New Parts. Δ indicates safety critical components.

Parts without **Parts No.** are not supplied.

Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.

Teile ohne **Parts No.** werden nicht geliefert.

L : Scandinavia

K : USA

P : Canada

Y : PX (Far East, Hawaii)

T : England

E : Europe

Y : AAFES (Europe)

X : Australia

M : Other Areas

| Ref. No. | Address | New parts | Parts No. | Description | Desti-nation |
|----------------|---------|-----------|-------------|---------------------------------|--------------|
| TS-870S | | | | | |
| 1 | 1B | * | A01-2097-01 | METALLIC CABINET (UPPER) | |
| 2 | 3B | * | A01-2098-01 | METALLIC CABINET (LOWER) | |
| 33 | 3A,2D | * | A62-0382-02 | PANEL ASSY | |
| 3 | 2C | * | A62-0384-02 | PANEL | |
| 4 | 2D | * | B10-1227-03 | FRONT GLASS | |
| 5 | 2D | * | B11-1123-04 | REFLECTOR | |
| 6 | 1E | * | B38-0736-05 | DISPLAY ASSY | |
| 7 | 2B | | B42-3343-04 | S/N OLABBL | |
| 8 | 3N | | B42-5526-04 | STICKER | K |
| 9 | 2C | * | B43-1045-04 | BADGE (KENWOOD) | |
| 10 | 2C | * | B43-1101-04 | BADGE (DSP) | |
| 11 | 3N | | B44-2163-04 | UPC CORD LABEL | |
| 12 | 10 | | B46-0310-03 | WARRANTY CARD | EE2E3E9 |
| 12 | 10 | | B46-0410-40 | WARRANTY CARD | K |
| 12 | 10 | | B46-0422-00 | WARRANTY CARD | P |
| 13 | 10 | * | B62-0542-00 | INSTRUCTION MANUAL (ENGLISH) | |
| 14 | 10 | * | B62-0543-00 | INSTRUCTION MANUAL (SPANISH) | MM2E2E3 |
| 15 | 10 | * | B62-0544-00 | INSTRUCTION MANUAL (NETHERLAND) | MM2E2E3 |
| 16 | 10 | * | B62-0545-00 | INSTRUCTION MANUAL (FRENCH) | PMM2 |
| 16 | 10 | * | B62-0545-00 | INSTRUCTION MANUAL (FRENCH) | E2E3E9 |
| 17 | 10 | * | B62-0546-00 | INSTRUCTION MANUAL (GERMAN) | E |
| 18 | 10 | * | B62-0547-00 | INSTRUCTION MANUAL (ITALIAN) | E |
| 19 | 2B | * | B72-0911-04 | MODEL NAME PLATE | KMM2XP |
| 19 | 2B | * | B72-0912-04 | MODEL NAME PLATE | EE2E3E9 |
| 20 | 1H | | E04-0167-05 | RF COAXIAL CABLE RECEPTACLE (M) | |
| 21 | 1N | | E07-0751-05 | DIN PLUG (7P) | ACSY |
| 22 | 1N | | E07-1351-05 | DIN PLUG (13P) | ACSY |
| 23 | 1H | | E23-0992-04 | EARTH LUG (ANT) | |
| 24 | 1N | * | E30-3157-15 | DC CORD | ACSY |
| W51 | 2K,3K | | E31-3433-05 | LEAD WIRE WITH MINIPIN PLUG | |
| W52 | 3I,4K | | E37-0062-05 | LEAD WIRE WITH MINIPIN PLUG | |
| W53 | 2I,4K | * | E37-0518-05 | LEAD WIRE WITH MINIPIN PLUG | |
| W54 | 1I,2I | * | E37-0519-05 | LEAD WIRE WITH MINIPIN PLUG | |
| W56 | 1J,2K | * | E37-0521-05 | LEAD WIRE WITH MINIPIN PLUG | |
| W57 | 1I,4K | * | E37-0522-05 | LEAD WIRE WITH MINIPIN PLUG | |
| W58 | 1I | * | E37-0523-05 | FLAT CABLE | |
| W59 | 2I,1J | * | E37-0524-05 | FLAT CABLE | |
| W60 | 2A | * | E37-0526-05 | FLAT CABLE | |
| W61 | 2A | * | E37-0527-05 | FLAT CABLE | |
| W62 | 3I | * | E37-0528-05 | FLAT CABLE | |
| W63-1 | 4J | * | E37-0529-05 | FLAT CABLE | |
| W63-2 | 3I,4I | * | E37-0529-05 | FLAT CABLE | |
| W64 | 4J | * | E37-0530-05 | FLAT CABLE | |
| W65 | 3I | * | E37-0531-05 | FLAT CABLE | |
| W66 | 3I,4I | * | E37-0532-05 | FLAT CABLE | |
| W67 | 2A | * | E37-0533-05 | FLAT CABLE | |
| W68 | 2A | * | E37-0534-05 | FLAT CABLE | |
| W69 | 2I,4I | * | E37-0535-05 | LEAD WIRE WITH MINIPIN PLUG | |
| W70 | 2A | * | E37-0537-05 | LEAD WIRE WITH CONNECTOR | |
| W71 | 1I,1J | * | E37-0538-05 | LEAD WIRE WITH CONNECTOR | |
| W72 | 1I,4K | * | E37-0540-05 | LEAD WIRE WITH CONNECTOR | |
| W73 | 1I,1J | * | E37-0541-15 | LEAD WIRE WITH CONNECTOR | |
| W74 | 1K | * | E37-0542-05 | LEAD WIRE WITH CONNECTOR | |

| Ref. No. | Address | New parts | Parts No. | Description | Desti-nation |
|----------|---------|-----------|-------------|---------------------------------|--------------|
| W75 | 2J | * | E37-0543-05 | LEAD WIRE WITH CONNECTOR | |
| W76 | 2A | * | E37-0547-15 | LEAD WIRE WITH CONNECTOR (SP) | |
| W77 | 2J | * | E37-0548-05 | LEAD WIRE WITH CONNECTOR | |
| W78 | 2I,4I | * | E37-0549-05 | LEAD WIRE WITH CONNECTOR | |
| W79 | 2A | * | E37-0550-15 | LEAD WIRE WITH CONNECTOR | |
| W80 | 2I,4J | * | E37-0551-05 | LEAD WIRE WITH CONNECTOR | |
| W81 | 1I,4I | * | E37-0552-05 | LEAD WIRE WITH CONNECTOR | |
| W82 | 2K,3K | * | E37-0569-05 | LEAD WIRE WITH MINIPIN PLUG | |
| W83 | - | * | E37-0570-05 | LEAD WIRE WITH CONNECTOR (VS-2) | |
| 26 | 1N | | F05-2531-05 | FUSE (25A/32V) ACSY | |
| 27 | 1N | | F06-4029-05 | FUSE (4A/250V) ACSY | |
| 28 | 2G | * | F09-0449-05 | FAN MOTOR | |
| 29 | 3G | | F10-1206-04 | SHIELDING COVER (EARTH SPRING) | |
| 30 | 2B,1G | | F10-1468-13 | SHIELDING COVER (FINAL) | |
| 31 | 1G | | G02-0574-04 | FLAT SPRING (AVR) | |
| 32 | 2G | * | G02-0767-04 | FLAT SPRING (THERMMISTOR) | |
| 34 | 1A | | G10-0697-04 | FIBROUS SHEET (SP) | |
| 35 | 1D | | G10-0702-04 | FIBROUS SHEET (SUB 2) | |
| 36 | 1A | | G10-0703-04 | FIBROUS SHEET (CASE) | |
| 39 | 1B | | G13-0934-04 | CUSHION (UPPER CASE) | |
| 40 | 2G | | G13-1310-04 | CUSHION (FAN) | |
| 41 | 4F | * | G13-1327-04 | CUSHION (DRI-3) | |
| 42 | 2D | * | G13-1480-04 | CUSHION (KNOB) | |
| 43 | 2D | * | G13-1481-04 | CUSHION (KNOB) | |
| 44 | 2D | * | G13-1482-04 | CUSHION (KNOB) | |
| 45 | 2D | * | G13-1483-04 | CUSHION (KNOB) | |
| 46 | 1A | * | G13-1498-04 | CUSHION (SP) | |
| 47 | 3B | * | G13-1511-04 | CUSHION (LOWER CASE) | |
| 50 | 2N | * | H10-2791-01 | POLYSTYRENE FOAMED FIXTURE (F) | |
| 51 | 20 | * | H10-2792-11 | POLYSTYRENE FOAMED FIXTURE (R) | |
| 52 | 1N | * | H13-0963-04 | CARTON BOARD | |
| 53 | 20 | | H20-1437-03 | PROTECTION COVER | |
| 54 | 1N | | H25-0029-04 | BAG (FUSE) | |
| 55 | 1N | | H25-0079-04 | BAG (MIC) | |
| 56 | 1N | | H25-0708-04 | BAG (DC CORD) | |
| 57 | 20 | * | H52-0730-02 | ITEM CARTON CASE | |
| 58 | 30 | * | H62-0641-03 | OUTER PACKING CASE | |
| 59 | 3B | | J02-0049-14 | FOOT (REAR) | |
| 60 | 1A,3A | | J02-0441-05 | FOOT (SIDE) | |
| 61 | 3A | * | J02-0474-05 | FOOT (FRONT) | |
| 62 | 2G | | J21-4326-03 | HARDWARE FIXTURE (FAN) | |
| 63 | 1D | * | J21-4496-05 | HARDWARE FIXTURE (PHONE JACK) | |
| 64 | 2D | | J31-0141-04 | COLLAR (MIC) | |
| 65 | 2H | * | J32-0923-04 | HEXAGON BOSS | |
| - | | | J61-0307-05 | BAND | |
| 70 | 1B | | K01-0416-05 | HANDLE ASSY | |
| 71 | 2C | * | K21-1102-04 | KNOB (MAIN : WITH SCREW) | |
| 72 | 2C | * | K29-4966-04 | KNOB RING (MAIN) | |
| 73 | 2D | * | K29-4967-03 | KNOB (FILTER) | |
| 74 | 2C | * | K29-4968-03 | KNOB (M.CH,RIT : WITH SPRING) | |
| 75 | 2C | * | K29-4969-03 | KNOB (INSIDE) | |
| 76 | 2C | * | K29-4970-03 | KNOB (OUTSIDE) | |
| 77 | 1C | * | K29-4978-03 | KNOB (POWER) | |
| 78 | 1D | * | K29-4979-03 | KNOB (UP/DOWN) | |

TS-870S

PARTS LSIT

TS-870S

RF UNIT (X44-3210-00)

| Ref. No. | Address | New parts | Parts No. | Description | Desti-nation |
|----------|---------|-----------|-------------|------------------------------|--------------|
| 79 | 1C | * | K29-4980-03 | KNOB (ANT, etc.) | |
| 80 | 1D | * | K29-4981-03 | KNOB (LED) | |
| 81 | 1C,1D | * | K29-4982-03 | KNOB (AT TUNE, etc.) | |
| 82 | 1D | * | K29-4983-03 | KNOB (LED) | |
| 83 | 1C | * | K29-4984-03 | KNOB (QUICK MEMO) | |
| 84 | 1C | * | K29-4985-03 | KNOB (LSB/USB) | |
| 85 | 1C | * | K29-4986-03 | KNOB (CW/-R) | |
| 86 | 1C | * | K29-4987-03 | KNOB (FSK/-R) | |
| 87 | 1C | * | K29-4988-03 | KNOB (FM/AM) | |
| 88 | 1D | * | K29-4989-03 | KNOB (AUTO NOTCH) | |
| 89 | 1D | * | K29-4990-03 | KNOB (BEAT CANCEL) | |
| 90 | 1D | * | K29-4991-03 | KNOB (N.R) | |
| 91 | 1D | * | K29-4992-03 | KNOB (TX EQ.) | |
| A | 1H | | N09-0372-04 | SCREW (DC) | |
| B | 1H | | N09-0682-04 | SCREW (GND) | |
| C | 3F | | N09-2051-05 | SCREW | X |
| D | 1H | | N11-0040-46 | FLANGE NUT (GND) | |
| E | 1H | | N14-0509-05 | NUT (GND) | |
| F | 1H | | N15-1040-46 | FLAT WASHER (GND) | |
| G | 1D,1E | | N32-2606-46 | FLAT HEAD SCREW | |
| H | 2A,3A | | N32-3006-46 | FLAT HEAD SCREW (SUB PANEL) | |
| I | 1B,3B | | N33-3006-41 | OVAL HEAD SCREW (CASE) | |
| J | 2A,2F | | N87-2606-46 | BRAZIER HEAD SCREW (UNIT,RL) | |
| K | 1A,1H | | N87-3006-46 | BRAZIER HEAD SCREW (AT,FAN) | |
| L | 2G,2H | | N87-3008-46 | BRAZIER HEAD SCREW | |
| M | 2B,1G | | N88-2608-46 | FLAT HEAD SCREW (FINAL) | |
| N | 2D | | N90-3008-46 | TP HEAD MACHIN SCREW (PANEL) | |
| P | 3A,3B | | N91-3010-46 | TP HEAD TAPPING SCREW (FOOT) | |
| SP | 1A | | T07-0252-15 | LOUDSPEAKER (8 ohm 1W) | |
| MIC | 1N | | T91-0352-15 | MICROPHONE ACSY | |
| 93 | 1E | | W02-1836-05 | ENCODER | |
| BATT | 2A | * | W09-0873-05 | LITHIUM CELL (3V 220MAh) | |

RF UNIT (X44-3210-00)

| | | | | | | | |
|--------|--|--|---------------|---------|---------|------|--|
| C1 | | | CK73FB1H103K | CHIP C | 0.010UF | K | |
| C2 | | | CC73FCH1H121J | CHIP C | 120PF | J | |
| C3 | | | CK73FF1C105Z | CHIP C | 1.0UF | Z | |
| C4,5 | | | CK73FB1H103K | CHIP C | 0.010UF | K | |
| C6 | | | CK73FB1E103K | CHIP C | 0.010UF | K | |
| C7 | | | CK73FB1H103K | CHIP C | 0.010UF | K | |
| C8 | | | CK73FB1H102K | CHIP C | 1000PF | K | |
| C10 | | | CK73FB1H103K | CHIP C | 0.010UF | K | |
| C14 | | | CK73FB1E103K | CHIP C | 0.010UF | K | |
| C15 | | | CK73FF1C105Z | CHIP C | 1.0UF | Z | |
| C16 | | | CK73FF1E104Z | CHIP C | 0.10UF | Z | |
| C17 | | | CK73FF1C105Z | CHIP C | 1.0UF | Z | |
| C18 | | | CK73FB1E103K | CHIP C | 0.010UF | K | |
| C19 | | | CK73FB1H182K | CHIP C | 1800PF | K | |
| C21 | | | CK73FB1H682K | CHIP C | 6800PF | K | |
| C22 | | | CK73FB1H182K | CHIP C | 1800PF | K | |
| C23 | | | CK73FF1E104Z | CHIP C | 0.10UF | Z | |
| C27 | | | CK73FF1E104Z | CHIP C | 0.10UF | Z | |
| C28 | | | CE04EW1C100M | ELECTRO | 10UF | 16WV | |
| C29-31 | | | CK73FF1E104Z | CHIP C | 0.10UF | Z | |
| C32 | | | CE04EW1C100M | ELECTRO | 10UF | 16WV | |
| C33 | | | CK73FF1C105Z | CHIP C | 1.0UF | Z | |

| Ref. No. | Address | New parts | Parts No. | Description | Desti-nation | |
|----------|---------|-----------|---------------|-------------|--------------|---|
| C34 | | | CK73FF1E104Z | CHIP C | 0.10UF | Z |
| C35 | | | CC73FCH1H050C | CHIP C | 5.0PF | C |
| C36 | | | CK73FB1H103K | CHIP C | 0.010UF | K |
| C39,40 | | | CK73FB1E103K | CHIP C | 0.010UF | K |
| C47 | | | CK73FB1H103K | CHIP C | 0.010UF | K |
| C48 | | | CK73FB1H223K | CHIP C | 0.022UF | K |
| C49 | | | CK73FB1H103K | CHIP C | 0.010UF | K |
| C50 | | | CK73FF1E104Z | CHIP C | 0.10UF | Z |
| C51 | | | CK73FF1C105Z | CHIP C | 1.0UF | Z |
| C52 | | | CK73FB1H222K | CHIP C | 2200PF | K |
| C53 | | | CK73FB1H682K | CHIP C | 6800PF | K |
| C54 | | | CK73FB1H222K | CHIP C | 2200PF | K |
| C55 | | | CK73FF1E104Z | CHIP C | 0.10UF | Z |
| C56 | | | CK73FF1C105Z | CHIP C | 1.0UF | Z |
| C57 | | | CK73FB1H472K | CHIP C | 4700PF | K |
| C58 | | | CK73FF1E104Z | CHIP C | 0.10UF | Z |
| C59 | | | CK73FF1C105Z | CHIP C | 1.0UF | Z |
| C60 | | | CC73FSL1H821J | CHIP C | 820PF | J |
| C61 | | | CK73FF1C105Z | CHIP C | 1.0UF | Z |
| C62 | | | CK73FB1H472K | CHIP C | 4700PF | K |
| C63 | | | CK73FF1E104Z | CHIP C | 0.10UF | Z |
| C64 | | | CK73FB1H222K | CHIP C | 2200PF | K |
| C65 | | | CK73FF1E104Z | CHIP C | 0.10UF | Z |
| C66 | | | CK73FF1C105Z | CHIP C | 1.0UF | Z |
| C67 | | | CK73FB1H561K | CHIP C | 560PF | K |
| C68 | | | CK73FF1C105Z | CHIP C | 1.0UF | Z |
| C69 | | | CK73FB1H222K | CHIP C | 2200PF | K |
| C70 | | | CK73FF1E104Z | CHIP C | 0.10UF | Z |
| C71 | | | CK73FB1H102K | CHIP C | 1000PF | K |
| C72 | | | CK73FF1E104Z | CHIP C | 0.10UF | Z |
| C73 | | | CK73FF1C105Z | CHIP C | 1.0UF | Z |
| C74 | | | CC73FSL1H271J | CHIP C | 270PF | J |
| C75 | | | CK73FF1C105Z | CHIP C | 1.0UF | Z |
| C76 | | | CK73FB1H102K | CHIP C | 1000PF | K |
| C77,78 | | | CK73FF1E104Z | CHIP C | 0.10UF | Z |
| C80 | | | CK73FF1C105Z | CHIP C | 1.0UF | Z |
| C81 | | | CC73FCH1H050C | CHIP C | 5.0PF | C |
| C83 | | | CC73FCH1H050C | CHIP C | 5.0PF | C |
| C85 | | | CC73FCH1H050C | CHIP C | 5.0PF | C |
| C87 | | | CK73FF1C105Z | CHIP C | 1.0UF | Z |
| C88 | | | CK73FF1E104Z | CHIP C | 0.10UF | Z |
| C89 | | | CK73FB1H102K | CHIP C | 1000PF | K |
| C90 | | | CK73FF1E104Z | CHIP C | 0.10UF | Z |
| C91 | | | CK73FF1C105Z | CHIP C | 1.0UF | Z |
| C92 | | | CC73FCH1H21J | CHIP C | 120PF | J |
| C93 | | | CK73FF1C105Z | CHIP C | 1.0UF | Z |
| C94 | | | CK73FB1H102K | CHIP C | 1000PF | K |
| C95 | | | CK73FF1E104Z | CHIP C | 0.10UF | Z |
| C96 | | | CK73FB1H102K | CHIP C | 1000PF | K |
| C97 | | | CK73FF1E104Z | CHIP C | 0.10UF | Z |
| C98 | | | CK73FF1C105Z | CHIP C | 1.0UF | Z |
| C99 | | | CC73FCH1H820J | CHIP C | 82PF | J |
| C100 | | | CK73FF1C105Z | CHIP C | 1.0UF | Z |
| C101 | | | CK73FB1H102K | CHIP C | 1000PF | K |
| C102,103 | | | CK73FF1E104Z | CHIP C | 0.10UF | Z |
| C105 | | | CK73FF1C105Z | CHIP C | 1.0UF | Z |
| C106 | | | CC73FCH1H040C | CHIP C | 4.0PF | C |
| C108 | | | CC73FCH1H040C | CHIP C | 4.0PF | C |
| C110 | | | CK73FF1C105Z | CHIP C | 1.0UF | Z |

TS-870S

PARTS LIST

RF UNIT (X44-3210-00)

| Ref. No. | Address | New parts | Parts No. | Description | Desti-nation | Ref. No. | Address | New parts | Parts No. | Description | Desti-nation |
|----------|---------|-----------|---------------|-------------------|--------------|----------|---------|-----------|---------------|--------------------|--------------|
| C111 | | | CK73FF1E104Z | CHIP C 0.10UF Z | | C181 | | | CC73FCH1H050C | CHIP C 5.0PF C | |
| C112 | | | CC73FSL1H391J | CHIP C 390PF J | | C182 | | | CK73FB1E103K | CHIP C 0.010UF K | |
| C113 | | | CK73FF1E104Z | CHIP C 0.10UF Z | | C184 | | | CC73FCH1H050C | CHIP C 5.0PF C | |
| C114 | | | CK73FF1C105Z | CHIP C 1.0UF Z | | C185 | | | CC73FCH1H220J | CHIP C 22PF J | |
| C115 | | | CC73FCH1H680J | CHIP C 68PF J | | C186 | | | CC73FCH1H050C | CHIP C 5.0PF C | |
| C116 | | | CK73FF1C105Z | CHIP C 1.0UF Z | | C187 | | | CC73FCH1H1R5C | CHIP C 1.5PF C | |
| C117 | | | CC73FSL1H151J | CHIP C 150PF J | | C188 | | | CC73FCH1H220J | CHIP C 22PF J | |
| C118,119 | | | CK73FF1E104Z | CHIP C 0.10UF Z | | C189 | | | CC73FCH1H0R5C | CHIP C 0.5PF C | |
| C121 | | | CK73FF1C105Z | CHIP C 1.0UF Z | | C190 | | | CK73FB1E103K | CHIP C 0.010UF K | |
| C122 | | | CC73FCH1H050C | CHIP C 5.0PF C | | C191 | | | CC73FSL1H681J | CHIP C 680PF J | |
| C124 | | | CC73FCH1H050C | CHIP C 5.0PF C | | C192,193 | | | CK73FB1H102K | CHIP C 1000PF K | |
| C126 | | | CK73FF1C105Z | CHIP C 1.0UF Z | | C194 | | | CC73FSL1H331J | CHIP C 330PF J | |
| C127 | | | CK73FF1E104Z | CHIP C 0.10UF Z | | C195 | | | CC73FSL1H471J | CHIP C 470PF J | |
| C128 | | | CC73FCH1H221J | CHIP C 220PF J | | C196 | | | CK73FB1H102K | CHIP C 1000PF K | |
| C129 | | | CK73FF1E104Z | CHIP C 0.10UF Z | | C197 | | | CK73FB1E103K | CHIP C 0.010UF K | |
| C130 | | | CK73FF1C105Z | CHIP C 1.0UF Z | | C198 | | | CC73FCH1H020C | CHIP C 2.0PF C | |
| C131 | | | CC73FCH1H330J | CHIP C 33PF J | | C199 | | | CK73FB1E103K | CHIP C 0.010UF K | |
| C132 | | | CK73FF1C105Z | CHIP C 1.0UF Z | | C201-206 | | | CK73FB1E103K | CHIP C 0.010UF K | |
| C133 | | | CK73FF1E104Z | CHIP C 0.10UF Z | | C207 | | | CC73FCH1H470J | CHIP C 47PF J | |
| C134 | | | CK73FB1H103K | CHIP C 0.010UF K | | C208 | | | CK73FF1E104Z | CHIP C 0.10UF Z | |
| C135 | | | CC73FCH1H121J | CHIP C 120PF J | | C209 | | | CK73FB1H102K | CHIP C 1000PF K | |
| C136 | | | CK73FF1E104Z | CHIP C 0.10UF Z | | C211,212 | | | CK73FF1E104Z | CHIP C 0.10UF Z | |
| C137 | | | CC73FSL1H221J | CHIP C 220PF J | | C214 | | | CK73FB1E103K | CHIP C 0.010UF K | |
| C138 | | | CK73FB1E103K | CHIP C 0.010UF K | | C215 | | | CK73FF1E104Z | CHIP C 0.10UF Z | |
| C139 | | | CK73FF1E104Z | CHIP C 0.10UF Z | | C216 | | | CE04EW1C100M | ELECTRO 10UF 16WV | |
| C140,141 | | | CK73FB1E103K | CHIP C 0.010UF K | | C217 | | | CK73FF1E104Z | CHIP C 0.10UF Z | |
| C142 | | | CK73FF1E104Z | CHIP C 0.10UF Z | | C218 | | | CC73FCH1H470J | CHIP C 47PF J | |
| C143 | | | CC73FCH1H390J | CHIP C 39PF J | | C219 | | | CK73FB1E104Z | CHIP C 0.10UF Z | |
| C144,145 | | | CK73FB1E103K | CHIP C 0.010UF K | | C220 | | | CE04EW1H010M | ELECTRO 1.0UF 50WV | |
| C146,147 | | | CK73FF1E104Z | CHIP C 0.10UF Z | | C221-223 | | | CK73FF1E104Z | CHIP C 0.10UF Z | |
| C148 | | | CK73FB1E103K | CHIP C 0.010UF K | | C224 | | | CK73FB1E103K | CHIP C 0.010UF K | |
| C149 | | | CK73FF1E104Z | CHIP C 0.10UF Z | | C225 | | | CK73FB1H102K | CHIP C 1000PF K | |
| C150,151 | | | CK73FF1C105Z | CHIP C 1.0UF Z | | C226-228 | | | CK73FB1E103K | CHIP C 0.010UF K | |
| C152,153 | | | CK73FF1E104Z | CHIP C 0.10UF Z | | C229 | | | CC73FCH1H050C | CHIP C 5.0PF C | |
| C154 | | | CC73FCH1H101J | CHIP C 100PF J | | C230 | | | CK73FB1E103K | CHIP C 0.010UF K | |
| C155 | | | CC73FCH1H150J | CHIP C 15PF J | | C231 | | | CC73FCH1H220J | CHIP C 22PF J | |
| C156 | | | CK73FB1E103K | CHIP C 0.010UF K | | C232 | | | CK73FF1E104Z | CHIP C 0.10UF Z | |
| C157 | | | CC73FSL1H221J | CHIP C 220PF J | | C233 | | | CK73FB1H102K | CHIP C 1000PF K | |
| C158 | | | CK73FB1H471K | CHIP C 470PF K | | C234 | | | CK73FF1E104Z | CHIP C 0.10UF Z | |
| C159 | | | CK73FB1H102K | CHIP C 1000PF K | | C236 | | | CK73FB1E103K | CHIP C 0.010UF K | |
| C160 | | | CC73FCH1H470J | CHIP C 47PF J | | C237 | | | CC73FCH1H220J | CHIP C 22PF J | |
| C161 | | | CC73FCH1H820J | CHIP C 82PF J | | C238 | | | CK73FB1E103K | CHIP C 0.010UF K | |
| C162 | | | CK73FF1E104Z | CHIP C 0.10UF Z | | C239 | | | CK73FB1H471K | CHIP C 470PF K | |
| C163 | | | CK73FB1E103K | CHIP C 0.010UF K | | C240,241 | | | CK73FB1E103K | CHIP C 0.010UF K | |
| C164 | | | CC73FSL1H471J | CHIP C 470PF J | | C242 | | | CC73FSL1H471J | CHIP C 470PF J | |
| C165 | | | CK73FB1E103K | CHIP C 0.010UF K | | C243,244 | | | CK73FB1E103K | CHIP C 0.010UF K | |
| C166,167 | | | CK73FF1E104Z | CHIP C 0.10UF Z | | C245 | | | CC73FSL1H471J | CHIP C 470PF J | |
| C168 | | | CK73FB1E103K | CHIP C 0.010UF K | | C246 | | | CC73FCH1H010C | CHIP C 1.0PF C | |
| C169 | | | CC73FCH1H680J | CHIP C 68PF J | | C247 | | | CC73FSL1H471J | CHIP C 470PF J | |
| C170 | | | CK73FF1E104Z | CHIP C 0.10UF Z | | C248 | | | CK73FB1E103K | CHIP C 0.010UF K | |
| C171 | | | CC73FCH1H470J | CHIP C 47PF J | | C249 | | | CC73FCH1H0R5C | CHIP C 0.5PF C | |
| C172,173 | | | CK73FB1E103K | CHIP C 0.010UF K | | C250 | | | CC73FCH1H010C | CHIP C 1.0PF C | |
| C174 | | | CC73FSL1H471J | CHIP C 470PF J | | C251-253 | | | CK73FB1E103K | CHIP C 0.010UF K | |
| C175 | | | CC73FCH1H470J | CHIP C 47PF J | | C254 | | | CK73FF1E104Z | CHIP C 0.10UF Z | |
| C176 | | | CE04EW1C470M | ELECTRO 47UF 16WV | | C256,257 | | | CK73FB1E103K | CHIP C 0.010UF K | |
| C177 | | | CC73FCH1H050C | CHIP C 5.0PF C | | C260 | | | CK73FB1E103K | CHIP C 0.010UF K | |
| C178 | | | CC73FCH1H680J | CHIP C 68PF J | | C262,263 | | | CK73FB1E103K | CHIP C 0.010UF K | |
| C179 | | | CK73FF1E104Z | CHIP C 0.10UF Z | | C265-273 | | | CK73FB1E103K | CHIP C 0.010UF K | |
| C180 | | | CC73FCH1H020C | CHIP C 2.0PF C | | C274 | | | CC73FCH1H180J | CHIP C 18PF J | |

TS-870S

PARTS LSIT

RF UNIT (X44-3210-00)

| Ref. No. | Address | New parts | Parts No. | Description | Desti-nation | Ref. No. | Address | New parts | Parts No. | Description | Desti-nation |
|----------|---------|-----------|---------------|---------------------|--------------|----------|---------|-----------|---------------|----------------------|--------------|
| C275 | | | CC73FCH1H150J | CHIP C 15PF J | | C521 | | | CE04EW1C100M | ELECTRO 10UF 16WV | |
| C276 | | | CC73FCH1H180J | CHIP C 18PF J | | C522 | | | CK73FB1E103K | CHIP C 0.010UF K | |
| C277-279 | | | CK73FB1E103K | CHIP C 0.010UF K | | C523 | | | CC73FCH1H121J | CHIP C 120PF J | |
| C280 | | | CC73FCH1H101J | CHIP C 100PF J | | C524 | | | CC73FSL1H181J | CHIP C 180PF J | |
| C281,282 | | | CC73FCH1H220J | CHIP C 22PF J | | C525 | | | CC73FCH1H121J | CHIP C 120PF J | |
| C283 | | | CC73FCH1H330J | CHIP C 33PF J | | C526-530 | | | CK73FB1E103K | CHIP C 0.010UF K | |
| C285 | | | CK73FB1E223K | CHIP C 0.022UF K | | C531 | | | CC73FCH1H560J | CHIP C 56PF J | |
| C286 | | | CE04EW1H010M | ELECTRO 1.0UF 50WV | | C532 | | | CC73FSL1H391J | CHIP C 390PF J | |
| C287 | | | CE04EW1C100M | ELECTRO 10UF 16WV | | C533 | | | CC73FCH1H390J | CHIP C 39PF J | |
| C288 | | | CK73FB1H473K | CHIP C 0.047UF K | | C534 | | | CC73FCH1H680J | CHIP C 68PF J | |
| C289 | | | CE04EW1C100M | ELECTRO 10UF 16WV | | C535 | | | CC73FCH1H390J | CHIP C 39PF J | |
| C290 | | | CK73FB1E103K | CHIP C 0.010UF K | | C536 | | | CC73FCH1H101J | CHIP C 100PF J | |
| C291 | | | CE04EW1HR47M | ELECTRO 0.47UF 50WV | | C537 | | | CC73FCH1H680J | CHIP C 68PF J | |
| C292 | | | CK73FB1E103K | CHIP C 0.010UF K | | C538 | | | CC73FCH1H390J | CHIP C 39PF J | |
| C293 | | | CC73FCH1H101J | CHIP C 100PF J | | C539 | | | CC73FCH1H070D | CHIP C 7.0PF D | |
| C294 | | | CK73FF1E104Z | CHIP C 0.10UF Z | | C540 | | | CC73FCH1H680J | CHIP C 68PF J | |
| C295-298 | | | CK73FB1E103K | CHIP C 0.010UF K | | C541 | | | CC73FCH1H220J | CHIP C 22PF J | |
| C299,300 | | | CK73FB1H103K | CHIP C 0.010UF K | | C542 | | | CC73FCH1H330J | CHIP C 33PF J | |
| C301 | | | CK73FB1H102K | CHIP C 1000PF K | | C543-545 | | | CK73FB1E103K | CHIP C 0.010UF K | |
| C302 | | | CK73FB1H103K | CHIP C 0.010UF K | | C546 | | | CC73FCH1H121J | CHIP C 120PF J | |
| C303 | | | CK73FB1H102K | CHIP C 1000PF K | | C547 | | | CE04EW1C470M | ELECTRO 47UF 16WV | |
| C304 | | | CK45FE2H222P | CERAMIC 2200PF P | | C548-555 | | | CK73FB1E103K | CHIP C 0.010UF K | |
| C305 | | | CK73FB1H103K | CHIP C 0.010UF K | | C556 | | | CK73FB1H102K | CHIP C 1000PF K | |
| C306,307 | | | CK73FB1H102K | CHIP C 1000PF K | | C557 | | | CC73FCH1H330J | CHIP C 33PF J | |
| C308 | | | CK73FB1H103K | CHIP C 0.010UF K | | C558 | | | CC73FCH1H0R5C | CHIP C 0.5PF C | |
| C310 | | | CK73FB1H103K | CHIP C 0.010UF K | | C560 | | | CC73FCH1H0R5C | CHIP C 0.5PF C | |
| C312 | | | CE04EW1C100M | ELECTRO 10UF 16WV | | C561 | | | CC73FCH1H330J | CHIP C 33PF J | |
| C313,314 | | | CK73FB1H103K | CHIP C 0.010UF K | | C562-564 | | | CK73FB1E103K | CHIP C 0.010UF K | |
| C315 | | | CE04EW1C100M | ELECTRO 10UF 16WV | | C565 | | | C92-0516-05 | CHIP-TAN 4.7UF 16WV | |
| C316-327 | | | CK73FB1H102K | CHIP C 1000PF K | | C566,567 | | | CC73FCH1H470J | CHIP C 47PF J | |
| C328-331 | | | CK73FB1E103K | CHIP C 0.010UF K | | C568 | | | CC73FCH1H101J | CHIP C 100PF J | |
| C332 | | | CK73FB1H102K | CHIP C 1000PF K | | C569 | | | CE04EW1C100M | ELECTRO 10UF 16WV | |
| C333 | | | CK73FB1E103K | CHIP C 0.010UF K | | C570,571 | | | CK73FB1E103K | CHIP C 0.010UF K | |
| C334 | | | CC73FCH1H330J | CHIP C 33PF J | | C572 | | | CC73FCH1H00D | CHIP C 10PF D | |
| C335 | | | CK73FB1E103K | CHIP C 0.010UF K | | C573 | | | CC73FCH1H050C | CHIP C 5.0PF C | |
| C338 | | | CC73FSL1H221J | CHIP C 220PF J | | C574-576 | | | CK73FB1E103K | CHIP C 0.010UF K | |
| C339,340 | | | CC73FCH1H220J | CHIP C 22PF J | | C577 | | | CK73FB1H331K | CHIP C 330PF K | |
| C341-346 | | | CK73FB1E103K | CHIP C 0.010UF K | | C578 | | | CC73FCH1H620J | CHIP C 62PF J | |
| C347,348 | | | CC73FCH1H100D | CHIP C 10PF D | | C579 | | | CK73FB1H331K | CHIP C 330PF K | |
| C350 | | | C92-0004-05 | CHIP-TAN 1.0UF 16WV | | C581 | | | CC73FCH1H820J | CHIP C 82PF J | |
| C500 | | | CK73FB1E103K | CHIP C 0.010UF K | | C583 | | | CK73FB1H103K | CHIP C 0.010UF K | |
| C501 | | | CE04NW1C100M | ELECTRO 10UF 16WV | | C584 | | | CE04EW1C100M | ELECTRO 10UF 16WV | |
| C502 | | | CK73FB1E103K | CHIP C 0.010UF K | | C585 | | | CK73FB1H103K | CHIP C 0.010UF K | |
| C503 | | | CE04NW1C100M | ELECTRO 10UF 16WV | | C586 | | | CK73FB1H682K | CHIP C 6800PF K | |
| C504 | | | CK73FB1E103K | CHIP C 0.010UF K | | C587 | | | CK73FB1H123K | CHIP C 0.012UF K | |
| C505 | | | CE04EW1C100M | ELECTRO 10UF 16WV | | C588 | | | CK73FB1H682K | CHIP C 6800PF K | |
| C506 | | | CK73FB1E103K | CHIP C 0.010UF K | | C591 | | | CK73FB1H103K | CHIP C 0.010UF K | |
| C507 | | | CE04NW1C100M | ELECTRO 10UF 16WV | | C593 | | | CK73FB1H102K | CHIP C 1000PF K | |
| C508 | | | CK73FB1E103K | CHIP C 0.010UF K | | C594 | | | CC73FSL1H221J | CHIP C 220PF J | |
| C509 | | | CE04NW1C100M | ELECTRO 10UF 16WV | | C595 | | | CK73FB1H103K | CHIP C 0.010UF K | |
| C510 | | | CK73FB1E103K | CHIP C 0.010UF K | | C596 | | | CC73FCH1H0R5C | CHIP C 0.5PF C | |
| C511 | | | CE04EW1C100M | ELECTRO 10UF 16WV | | C597 | | | CC73FCH1H270J | CHIP C 27PF J | |
| C512,513 | | | CK73FB1E103K | CHIP C 0.010UF K | | C598-602 | | | CK73FB1H103K | CHIP C 0.010UF K | |
| C514 | | | C92-0516-05 | CHIP-TAN 4.7UF 16WV | | C603 | | | CK73FB1H102K | CHIP C 1000PF K | |
| C515 | | | CC73FSL1H271J | CHIP C 270PF J | | C604 | | | CK73FB1H103K | CHIP C 0.010UF K | |
| C516 | | | CC73FSL1H561J | CHIP C 560PF J | | C606 | | | CC73FCH1H270J | CHIP C 27PF J | |
| C517 | | | CK73FB1E103K | CHIP C 0.010UF K | | C618 | | | CE04EW1C101M | ELECTRO 100UF 16WV | |
| C518 | | | CC73FSL1H271J | CHIP C 270PF J | | C619 | | | C92-0001-05 | CHIP-TAN 0.10UF 35WV | |
| C519,520 | | | CK73FB1E103K | CHIP C 0.010UF K | | C620-623 | | | CK73FB1H102K | CHIP C 1000PF K | |

TS-870S

PARTS LIST

RF UNIT (X44-3210-00)

| Ref. No. | Address | New parts | Parts No. | Description | Desti-nation | Ref. No. | Address | New parts | Parts No. | Description | Desti-nation |
|----------|---------|-----------|---------------|---------------------|--------------|-----------|---------|-------------|---------------------|-------------------------|--------------|
| C624 | | | CK73FB1E103K | CHIP C 0.010UF K | | C690 | | | CC73FCH1H470J | CHIP C 47PF J | |
| C625-628 | | | CK73FB1H102K | CHIP C 1000PF K | | C691 | | | CC73FCH1H270J | CHIP C 27PF J | |
| C629 | | | CE04EW1C101M | ELECTRO 100UF 16WV | | C692-696 | | | CK73FB1E103K | CHIP C 0.010UF K | |
| C630,631 | | | CK73FB1E103K | CHIP C 0.010UF K | | C697 | | | CE04EW1C100M | ELECTRO 10UF 16WV | |
| C630,631 | | | CK73FB1E103K | CHIP C 0.010UF K | | C698 | | | CK73FB1H102K | CHIP C 1000PF K | |
| C632 | | | CE04EW1C101M | ELECTRO 100UF 16WV | | C699 | | | CK73FB1E103K | CHIP C 0.010UF K | |
| C633 | | | CC73FCH1H101J | CHIP C 100PF J | | C700 | | | CK73FB1H102K | CHIP C 1000PF K | |
| C634 | | | CC73FCH1H180J | CHIP C 18PF J | | C701 | | | CC73FCH1H330J | CHIP C 33PF J | |
| C635 | | | CK73FB1H102K | CHIP C 1000PF K | | C702 | | | CC73FCH1H100D | CHIP C 10PF D | |
| C636 | | | CC73FCH1H330J | CHIP C 33PF J | | C703 | | | CC73FCH1H680J | CHIP C 68PF J | |
| C637 | | | CC73FCH1H080D | CHIP C 8.0PF D | | C704,705 | | | CK73FB1H103K | CHIP C 0.010UF K | |
| C638 | | | CK73FCH1H120J | CHIP C 12PF J | | C706 | | | CE04EW1C470M | ELECTRO 47UF 16WV | |
| C639 | | | CK73FCH1H560J | CHIP C 56PF J | | C707 | | | CK73FB1H103K | CHIP C 0.010UF K | |
| C640 | | | CK73FB1H183K | CHIP C 0.018UF K | | C708 | | | CE04EW1C101M | ELECTRO 100UF 16WV | |
| C641 | | | CK73FCH1H120J | CHIP C 12PF J | | C710 | | | CK73FB1H102K | CHIP C 1000PF K | |
| C642 | | | CK73FB1H102K | CHIP C 1000PF K | | C711 | | | CQ92M1H333K | MYLAR 0.033UF K | |
| C643 | | | CK73FCH1H330J | CHIP C 33PF J | | C712 | | | C91-1083-05 | FILM 0.47UF 63WV | |
| C644 | | | CK73FCH1H120J | CHIP C 12PF J | | C713 | | | CK73FB1H103K | CHIP C 0.010UF K | |
| C645 | | | CK73FCH1H150J | CHIP C 15PF J | | C714 | | | C92-0516-05 | CHIP-TAN 4.7UF 16WV | |
| C646 | | | CK73FCH1H390J | CHIP C 39PF J | | C715,716 | | | CK73FB1H102K | CHIP C 1000PF K | |
| C647 | | | CC73FCH1H100D | CHIP C 10PF D | | C717 | | | CE04EW1C101M | ELECTRO 100UF 16WV | |
| C648 | | | CK73FB1H102K | CHIP C 1000PF K | | C719 | | | CC73FCH1H020C | CHIP C 2.0PF C | |
| C649 | | | CK73FCH1H160J | CHIP C 16PF J | | C721-726 | | | CC73FCH1H270J | CHIP C 27PF J | |
| C650 | | | CK73FCH1H240J | CHIP C 24PF J | | C727,728 | | | CC73FCH1H100D | CHIP C 10PF D | |
| C651 | | | CK73FCH1H150J | CHIP C 15PF J | | C729 | | | CC73FCH1H020C | CHIP C 2.0PF C | |
| C652 | | | CK73FCH1H390J | CHIP C 39PF J | | C730-732 | | | CK73FB1H102K | CHIP C 1000PF K | |
| C653 | | | CK73FB1H183K | CHIP C 0.018UF K | | C744 | | | CK73FB1H102K | CHIP C 1000PF K | |
| C654 | | | CC73FCH1H040C | CHIP C 4.0PF C | | C750-757 | | | CC73FCH1H101J | CHIP C 100PF J | |
| C655 | | | CK73FB1H102K | CHIP C 1000PF K | | C758-761 | | | CK73FB1H102K | CHIP C 1000PF K | |
| C656 | | | CK73FCH1H150J | CHIP C 15PF J | | C762 | | | CC73FCH1H101J | CHIP C 100PF J | |
| C657 | | | CC73FCH1H200J | CHIP C 20PF J | | C770 | | | CE04EW1C470M | ELECTRO 47UF 16WV | |
| C658 | | | CK73FCH1H160J | CHIP C 16PF J | | C771 | | | CK73FB1H103K | CHIP C 0.010UF K | |
| C659,660 | | | CK73FB1H102K | CHIP C 1000PF K | | C780 | | | CE04EW1E470M | ELECTRO 47UF 25WV | |
| C661 | | | CC73FCH1H100D | CHIP C 10PF D | | C781,782 | | | CK73FF1E104Z | CHIP C 0.10UF Z | |
| C662 | | | CK73FCH1H030C | CHIP C 3.0PF C | | C783 | | | CE04EW1C470M | ELECTRO 47UF 16WV | |
| C663 | | | CC73FCH1H020C | CHIP C 2.0PF C | | C784 | | | CE04EW1E470M | ELECTRO 47UF 25WV | |
| C664 | | | CK73FCH1H040C | CHIP C 4.0PF C | | C785,786 | | | CK73FF1E104Z | CHIP C 0.10UF Z | |
| C665,666 | | | CK73FB1H102K | CHIP C 1000PF K | | C787 | | | CE04EW1C470M | ELECTRO 47UF 16WV | |
| C667 | | | CK73FB1E103K | CHIP C 0.010UF K | | C800 | | | CC73FCH1H390J | CHIP C 39PF J | |
| C668 | | | CK73FB1H102K | CHIP C 1000PF K | | C801 | | | CC73FCH1H151J | CHIP C 150PF J | |
| C669 | | | CK73FB1E103K | CHIP C 0.010UF K | | C802 | | | CC73FCH1H390J | CHIP C 39PF J | |
| C670 | | | CK73FB1H102K | CHIP C 1000PF K | | C803 | | | CC73FCH1H050C | CHIP C 5.0PF C | |
| C671 | | | CK73FCH1H240J | CHIP C 24PF J | | C804 | | | CK73FB1H103K | CHIP C 0.010UF K | |
| C672 | | | CK73FB1H102K | CHIP C 1000PF K | | C805 | | | CC73FCH1H020C | CHIP C 2.0PF C | |
| C673 | | | CK73FCH1H010C | CHIP C 1.0PF C | | C806,807 | | | CK73FB1H103K | CHIP C 0.010UF K | |
| C674 | | | CC73FCH1H240J | CHIP C 24PF J | | C808 | | | C92-0004-05 | CHIP-TAN 1.0UF 16WV | |
| C675 | | | CK73FB1E103K | CHIP C 0.010UF K | | C907-912 | | | CK73FB1H102K | CHIP C 1000PF K | |
| C676 | | | C92-0004-05 | CHIP-TAN 1.0UF 16WV | | C914-926 | | | CK73FB1H102K | CHIP C 1000PF K | |
| C677 | | | CE04EW1C221M | ELECTRO 220UF 16WV | | TC506,507 | | | C05-0377-05 | TRIMMER CAPACITOR 10PF | |
| C678 | | | CK73FB1E103K | CHIP C 0.010UF K | | TC508,509 | | | C05-0376-05 | TRIMMER CAPACITOR 6PF | |
| C679 | | | CQ92M1H822K | MYLAR 8200PF K | | TC800 | | | C05-0344-05 | TRIMMER CAPACITOR 30PF | |
| C680 | | | C91-1083-05 | FILM 0.47UF 63WV | | | | | | | |
| C681 | | | CK73FB1H102K | CHIP C 1000PF K | | CN2 | | | E04-0154-05 | RF COAXIAL CABLE SOCKET | |
| C682,683 | | | CK73FB1E103K | CHIP C 0.010UF K | | CN4 | | | E04-0154-05 | RF COAXIAL CABLE SOCKET | |
| C684 | | | CK73FB1H103K | CHIP C 0.010UF K | | CN5,6 | | | E04-0191-05 | RF COAXIAL CABLE SOCKET | |
| C685,686 | | | CK73FB1E103K | CHIP C 0.010UF K | | CN7 | | | E40-3238-05 | PIN CONNECTOR (3P) | |
| C687 | | | CC73FCH1H020C | CHIP C 2.0PF C | | CN10 | | | E40-0154-05 | RF COAXIAL CABLE SOCKET | |
| C688 | | | CC73FCH1H1R5C | CHIP C 1.5PF C | | CN13 | * | E40-5741-05 | PIN CONNECTOR (8P) | | |
| C689 | | | CC73FCH1H030C | CHIP C 3.0PF C | | CN14 | * | E40-5740-05 | PIN CONNECTOR (20P) | | |

TS-870S

PARTS LSIT

RF UNIT (X44-3210-00)

| Ref. No. | Address | New parts | Parts No. | Description | Desti-nation | Ref. No. | Address | New parts | Parts No. | Description | Desti-nation |
|-----------|---------|-----------|-------------|------------------------------|--------------|----------|---------|-----------|-------------|------------------------------|--------------|
| CN15-17 | | * | E04-0154-05 | RF COAXIAL CABLE SOCKET | | L49 | | | L40-2282-14 | SMALL FIXED INDUCTOR | |
| CN500 | | * | E40-5740-05 | PIN CONNECTOR (2P) | | L50 | | | L34-4264-05 | COIL | |
| CN501 | | | E40-3237-05 | PIN CONNECTOR (2P) | | L51 | | | L40-1021-14 | SMALL FIXED INDUCTOR | |
| CN502-505 | | | E04-0154-05 | RF COAXIAL CABLE SOCKET (2P) | | L52 | | | L34-4265-05 | COIL | |
| CN506 | | | E40-3238-05 | PIN CONNECTOR (3P) | | L53 | | | L19-0324-05 | TROIDAL COIL | |
| CN508 | | | E40-5606-05 | PIN CONNECTOR (3P) | | L54 | | | L40-4785-48 | SMALL FIXED INDUCTOR (470NH) | |
| CN509 | | | E40-5607-05 | PIN CONNECTOR (4P) | | L55 | | | L19-0324-05 | TROIDAL COIL | |
| CN510 | | | E23-0996-05 | TERMINAL (TEST) | | L56 | | | L40-4705-48 | SMALL FIXED INDUCTOR (47UH) | |
| CN800 | | | E40-4463-05 | PIN CONNECTOR | | L57 | | | L40-2785-48 | SMALL FIXED INDUCTOR (270NH) | |
| CN801 | | | E40-4464-05 | PIN CONNECTOR | | L58 | | | L40-2285-48 | SMALL FIXED INDUCTOR (220NH) | |
| CN901 | | * | E40-3300-05 | PIN CONNECTOR (3P) | | L59 | | | L19-0324-05 | TROIDAL COIL | |
| CN903-907 | | * | E40-5743-05 | FLAT CABLE CONNECTOR (6P) | | L60 | | | L39-1255-05 | COIL | |
| J1 | | | E06-0752-05 | DIN SOCKET | | L61 | | | L40-1285-48 | SMALL FIXED INDUCTOR (120NH) | |
| J2,3 | | | E13-0166-05 | PIN JACK | | L62 | | | L39-1255-05 | COIL | |
| J901 | | * | E11-0462-05 | PHONE JACK | | L63 | | | L40-1015-48 | SMALL FIXED INDUCTOR (100NH) | |
| W1 | | * | E37-0546-05 | LEAD WIRE WITH CONNECTOR | | L64 | | | L39-1255-05 | COIL | |
| W2 | | * | E37-0517-05 | LEAD WIRE WITH MINIPIN PLUG | | L65 | | | L34-4222-05 | COIL | |
| 101 | 2F | | F11-1141-04 | SHIELDING COVER | | L68 | | | L40-1015-48 | SMALL FIXED INDUCTOR (100UH) | |
| A502 | 2F | | F11-1140-04 | SHIELDING CASE | | L69 | | | L40-2285-48 | SMALL FIXED INDUCTOR (220NH) | |
| - | | | J30-0545-05 | SPACER (TO XF1) | | L70 | | * | L34-4393-05 | COIL | |
| - | | | J30-0563-05 | SPACER (TO XF3, X800) | | L71 | | | L40-3395-48 | SMALL FIXED INDUCTOR (3.3UH) | |
| CF500,501 | | * | L72-0343-05 | CERAMIC FILTER (8.4MHZ) | | L73 | | * | L34-4394-05 | COIL | |
| L1 | | * | L39-1254-05 | COIL | | L74 | | | L40-2295-48 | SMALL FIXED INDUCTOR (2.2UH) | |
| L2 | | | L19-0324-05 | TROIDAL COIL | | | | | L40-2285-48 | SMALL FIXED INDUCTOR (220NH) | |
| L3 | | | L40-1021-14 | SMALL FIXED INDUCTOR | | L75 | | | L34-4209-05 | COIL | |
| L7 | | | L40-2701-14 | SMALL FIXED INDUCTOR | | L76 | | | L40-3395-48 | SMALL FIXED INDUCTOR (3.3UH) | |
| L8 | | | L40-4791-14 | SMALL FIXED INDUCTOR | | L77 | | | L34-0943-05 | COIL | |
| L9 | | | L40-2701-14 | SMALL FIXED INDUCTOR | | L78 | | | L40-4785-48 | SMALL FIXED INDUCTOR (470NH) | |
| L10 | | | L40-1015-48 | SMALL FIXED INDUCTOR (100UH) | | L79 | | | L40-3395-48 | SMALL FIXED INDUCTOR (3.3UH) | |
| L11 | | | L19-0324-05 | TROIDAL COIL | | L81 | | | L34-0535-05 | COIL | |
| L12 | | | L40-1005-48 | SMALL FIXED INDUCTOR (10UH) | | L82 | | | L34-0536-05 | COIL | |
| L13 | | | L40-4705-48 | SMALL FIXED INDUCTOR (47UH) | | L83,84 | | | L40-1015-48 | SMALL FIXED INDUCTOR (100UH) | |
| L14,15 | | | L40-1501-14 | SMALL FIXED INDUCTOR | | L86 | | | L40-2285-48 | SMALL FIXED INDUCTOR (220NH) | |
| L16 | | | L40-1021-14 | SMALL FIXED INDUCTOR | | L87 | | | L40-4705-48 | SMALL FIXED INDUCTOR (47UH) | |
| L17,18 | | | L40-5691-14 | SMALL FIXED INDUCTOR | | L88 | | | L19-0324-05 | TROIDAL COIL | |
| L19 | | | L40-1292-14 | SMALL FIXED INDUCTOR | | L89 | | * | L34-4395-05 | COIL | |
| L20 | | | L40-8291-14 | SMALL FIXED INDUCTOR | | L90 | | * | L39-1255-05 | COIL | |
| L21,22 | | | L40-1292-14 | SMALL FIXED INDUCTOR | | L91 | | * | L34-4395-05 | COIL | |
| L23 | | | L40-5691-14 | SMALL FIXED INDUCTOR | | L92 | | | L34-4211-05 | COIL | |
| L24 | | | L40-1292-14 | SMALL FIXED INDUCTOR | | L93 | | | L40-1015-48 | SMALL FIXED INDUCTOR (100UH) | |
| L25 | | | L40-1092-14 | SMALL FIXED INDUCTOR | | L94 | | * | L34-4395-05 | COIL | |
| L26 | | | L40-3391-14 | SMALL FIXED INDUCTOR | | L95 | | | L34-4207-05 | COIL | |
| L27 | | | L40-1092-14 | SMALL FIXED INDUCTOR | | L98 | | | L34-0943-05 | COIL | |
| L28-31 | | | L34-4262-05 | COIL | | L99 | | | L34-0781-05 | COIL | |
| L32 | | | L40-3382-14 | SMALL FIXED INDUCTOR | | L100 | | | L34-0536-05 | COIL | |
| L33 | | | L40-2792-14 | SMALL FIXED INDUCTOR | | L101 | | | L40-4705-48 | SMALL FIXED INDUCTOR (47UH) | |
| L34 | | | L40-3382-14 | SMALL FIXED INDUCTOR | | L102 | | | L40-3395-48 | SMALL FIXED INDUCTOR (3.3UH) | |
| L35 | | | L40-2282-14 | SMALL FIXED INDUCTOR | | L107 | | | L40-1015-48 | SMALL FIXED INDUCTOR (100UH) | |
| L36 | | | L40-2292-14 | SMALL FIXED INDUCTOR | | L108 | | | L40-1005-48 | SMALL FIXED INDUCTOR (10UH) | |
| L37 | | | L40-2282-14 | SMALL FIXED INDUCTOR | | L110,111 | | * | L40-1805-48 | SMALL FIXED INDUCTOR (18UH) | |
| L38-40 | | | L34-4289-05 | COIL | | L112,113 | | * | L40-1081-42 | SMALL FIXED INDUCTOR (0.1UH) | |
| L41 | | | L40-2282-14 | SMALL FIXED INDUCTOR | | L301 | | * | L40-1001-42 | SMALL FIXED INDUCTOR (10UH) | |
| L42 | | | L40-1292-14 | SMALL FIXED INDUCTOR | | L304-310 | | * | L40-1001-42 | SMALL FIXED INDUCTOR (10UH) | |
| L43 | | | L40-2282-14 | SMALL FIXED INDUCTOR | | L314-318 | | * | L40-1001-42 | SMALL FIXED INDUCTOR (10UH) | |
| L44-46 | | * | L34-4392-05 | COIL | | L500-505 | | | L40-1005-48 | SMALL FIXED INDUCTOR (10UH) | |
| L47 | | | L40-2282-14 | SMALL FIXED INDUCTOR | | L506,507 | | * | L40-6805-48 | SMALL FIXED INDUCTOR (68UH) | |
| L48 | | | L40-1292-14 | SMALL FIXED INDUCTOR | | L508 | | | L40-1005-48 | SMALL FIXED INDUCTOR (10UH) | |
| | | | | | | L509,510 | | * | L40-2705-48 | SMALL FIXED INDUCTOR (27UH) | |

TS-870S

PARTS LIST

RF UNIT (X44-3210-00)

| Ref. No. | Address | New parts | Parts No. | Description | Desti-nation | Ref. No. | Address | New parts | Parts No. | Description | Desti-nation |
|-----------|---------|-----------|--------------|------------------------------|--------------|----------|---------|-----------|--------------|-------------|--------------|
| L511 | | * | L40-1805-48 | SMALL FIXED INDUCTOR (18UH) | | R14 | | | RK73FB2A222J | CHIP R 2.2K | J 1/10W |
| L512,513 | | * | L40-2705-48 | SMALL FIXED INDUCTOR (27UH) | | R18 | | | RK73FB2A103J | CHIP R 10K | J 1/10W |
| L514 | | | L40-2205-48 | SMALL FIXED INDUCTOR (22UH) | | R19 | | | RK73FB2A330J | CHIP R 33 | J 1/10W |
| L515 | | * | L40-1805-48 | SMALL FIXED INDUCTOR (18UH) | | R20 | | | RK73FB2A102J | CHIP R 1.0K | J 1/10W |
| L516 | | | L40-5695-48 | SMALL FIXED INDUCTOR (5.6UH) | | R21,22 | | | RK73FB2A330J | CHIP R 33 | J 1/10W |
| L517 | | | L40-1005-48 | SMALL FIXED INDUCTOR (10UH) | | R23 | | | RK73FB2A101J | CHIP R 100 | J 1/10W |
| L518 | | | L34-4222-05 | COIL | | R24 | | | RK73FB2A222J | CHIP R 2.2K | J 1/10W |
| L519 | | * | L34-4421-05 | COIL | | R25 | | | RK73FB2A551J | CHIP R 560 | J 1/10W |
| L520 | | | L34-4222-05 | COIL | | R27 | | | RK73FB2A181J | CHIP R 180 | J 1/10W |
| L521,522 | | | L40-2285-48 | SMALL FIXED INDUCTOR (220NH) | | R28 | | | RK73FB2A680J | CHIP R 68 | J 1/10W |
| L523 | | | L40-1005-48 | SMALL FIXED INDUCTOR (10UH) | | R31 | | | RK73FB2A103J | CHIP R 10K | J 1/10W |
| L524 | | | L40-1095-48 | SMALL FIXED INDUCTOR (1UH) | | R44-55 | | | RK73FB2A223J | CHIP R 22K | J 1/10W |
| L525,526 | | | L40-2205-48 | SMALL FIXED INDUCTOR (22UH) | | R56 | | | RK73FB2A121J | CHIP R 120 | J 1/10W |
| L528 | | * | L34-4396-05 | COIL | | R58 | | | RK73FB2A680J | CHIP R 68 | J 1/10W |
| L529,530 | | | L34-4222-05 | COIL | | R59,60 | | | RK73FB2A560J | CHIP R 56 | J 1/10W |
| L531-534 | | | L40-1015-48 | SMALL FIXED INDUCTOR (100UH) | | R61 | | | RK73FB2A680J | CHIP R 68 | J 1/10W |
| L535 | | | L33-0664-05 | CHOKE COIL | | R62 | | | RK73FB2A220J | CHIP R 22 | J 1/10W |
| L536 | | | L34-2354-05 | COIL | | R63 | | | RK73FB2A121J | CHIP R 120 | J 1/10W |
| L537 | | | L40-4795-48 | SMALL FIXED INDUCTOR (4.7UH) | | R65 | | | RK73FB2A220J | CHIP R 22 | J 1/10W |
| L538 | | | L33-0664-05 | CHOKE COIL | | R66 | | | RK73FB2A121J | CHIP R 120 | J 1/10W |
| L539 | | | L34-2354-05 | COIL | | R68 | | | RK73FB2A220J | CHIP R 22 | J 1/10W |
| L540 | | | L40-4795-48 | SMALL FIXED INDUCTOR (4.7UH) | | R69 | | | RK73FB2A121J | CHIP R 120 | J 1/10W |
| L541 | | | L33-0664-05 | CHOKE COIL | | R71 | | | RK73FB2A220J | CHIP R 22 | J 1/10W |
| L542 | | | L34-2354-05 | COIL | | R72 | | | RK73FB2A121J | CHIP R 120 | J 1/10W |
| L543 | | | L40-4795-48 | SMALL FIXED INDUCTOR (4.7UH) | | R74 | | | RK73FB2A220J | CHIP R 22 | J 1/10W |
| L544 | | | L33-0664-05 | CHOKE COIL | | R75 | | | RK73FB2A121J | CHIP R 120 | J 1/10W |
| L545 | | | L34-2354-05 | COIL | | R77 | | | RK73FB2A220J | CHIP R 22 | J 1/10W |
| L546 | | | L40-4795-48 | SMALL FIXED INDUCTOR (4.7UH) | | R78 | | | RK73FB2A121J | CHIP R 120 | J 1/10W |
| L547 | | | L40-3385-48 | SMALL FIXED INDUCTOR (330NH) | | R79 | | | RK73FB2A220J | CHIP R 22 | J 1/10W |
| L548 | | | L40-1295-48 | SMALL FIXED INDUCTOR (1.2UH) | | R81 | | | RK73FB2A121J | CHIP R 120 | J 1/10W |
| L549 | | | L40-3385-48 | SMALL FIXED INDUCTOR (330NH) | | R83 | | | RK73FB2A220J | CHIP R 22 | J 1/10W |
| L550 | | | L40-2285-48 | SMALL FIXED INDUCTOR (220NH) | | R84 | | | RK73FB2A121J | CHIP R 120 | J 1/10W |
| L551 | | | L40-1015-48 | SMALL FIXED INDUCTOR (100NH) | | R86 | | | RK73FB2A220J | CHIP R 22 | J 1/10W |
| L552 | | * | L40-2795-48 | SMALL FIXED INDUCTOR (2.7UH) | | R87 | | | RK73FB2A121J | CHIP R 120 | J 1/10W |
| L553 | | | L40-1595-48 | SMALL FIXED INDUCTOR (1.5UH) | | R89 | | | RK73FB2A220J | CHIP R 22 | J 1/10W |
| L554 | | | L40-2295-48 | SMALL FIXED INDUCTOR (2.2UH) | | R90 | | | RK73FB2A121J | CHIP R 120 | J 1/10W |
| L555 | | | L40-3395-48 | SMALL FIXED INDUCTOR (3.3UH) | | R92 | | | RK73FB2A151J | CHIP R 150 | J 1/10W |
| L556 | | | L40-2285-48 | SMALL FIXED INDUCTOR (220NH) | | R93 | | | RK73FB2A223J | CHIP R 22K | J 1/10W |
| L557-559 | | | L40-1015-48 | SMALL FIXED INDUCTOR (100UH) | | R94 | | | RK73FB2A104J | CHIP R 100K | J 1/10W |
| L580,581 | | | L40-1005-48 | SMALL FIXED INDUCTOR (10UH) | | R95 | | | RK73FB2A393J | CHIP R 39K | J 1/10W |
| L601 | | | L40-3395-48 | SMALL FIXED INDUCTOR (3.3UH) | | R96,97 | | | RK73FB2A330J | CHIP R 33 | J 1/10W |
| L603 | | | L40-2785-48 | SMALL FIXED INDUCTOR (270NH) | | R98 | | | RK73FB2A473J | CHIP R 47K | J 1/10W |
| L604 | | | L40-1015-48 | SMALL FIXED INDUCTOR (100UH) | | R99 | | | RK73FB2A151J | CHIP R 150 | J 1/10W |
| X800 | | | L77-1521-15 | CRYSTAL RESONATOR (20MHZ) | | R100 | | | RK73FB2A331J | CHIP R 330 | J 1/10W |
| XF1 | | | L71-0401-05 | CRYSTAL FILTER (73.05MHZ) | | R101 | | | RK73FB2A221J | CHIP R 220 | J 1/10W |
| XF2 | | | L71-0235-05 | CRYSTAL FILTER | | R102 | | | RK73FB2A101J | CHIP R 100 | J 1/10W |
| XF3 | | | L71-0266-05 | CRYSTAL FILTER (8830KHZ) | | R103 | | | RK73FB2A473J | CHIP R 47K | J 1/10W |
| Q | 2F | | N38-2640-46 | PAN HEAD MACHINE SCREW | | R104,105 | | | RK73FB2A151J | CHIP R 150 | J 1/10W |
| CP500-505 | | | R90-0721-05 | MULTI-COMP 4.7K X 16 | | R106 | | | RK73FB2A152J | CHIP R 1.5K | J 1/10W |
| R1 | | | RD14BB2E470J | RD 47 J 1/4W | | R107 | | | RK73FB2A680J | CHIP R 68 | J 1/10W |
| R2 | | | RD14BB2E151J | RD 150 J 1/4W | | R108 | | | RK73FB2A220J | CHIP R 22 | J 1/10W |
| R3 | | | RK73FB2A101J | CHIP R 100 J 1/10W | | R109 | | | RK73FB2A100J | CHIP R 10 | J 1/10W |
| R5 | | | RD14BB2E101J | RD 100 J 1/4W | | R110 | | | RK73FB2A151J | CHIP R 150 | J 1/10W |
| R7 | | | RD14BB2E820J | RD 82 J 1/4W | | R111 | | | RK73FB2A471J | CHIP R 470 | J 1/10W |
| R9 | | | RK73FB2A221J | CHIP R 220 J 1/10W | | R112 | | | RK73FB2A102J | CHIP R 1.0K | J 1/10W |
| R10 | | | RK73FB2A181J | CHIP R 180 J 1/10W | | R113 | | | RK73FB2A471J | CHIP R 470 | J 1/10W |
| R11,12 | | | RK73FB2A331J | CHIP R 330 J 1/10W | | R114 | | | RK73FB2A562J | CHIP R 5.6K | J 1/10W |
| R13 | | | RK73FB2A470J | CHIP R 47 J 1/10W | | R115 | | | RK73FB2A220J | CHIP R 22 | J 1/10W |
| | | | | | | R116 | | | RK73FB2A150J | CHIP R 15 | J 1/10W |

TS-870S

PARTS LSIT

RF UNIT (X44-3210-00)

| Ref. No. | Address | New parts | Parts No. | Description | Desti-nation | Ref. No. | Address | New parts | Parts No. | Description | Desti-nation |
|----------|---------|-----------|---------------|---------------------|--------------|----------|---------|-----------|--------------|---------------------|--------------|
| R117 | | | RK73FB2A471J | CHIP R 470 J 1/10W | | R195,196 | | | RK73FB2A330J | CHIP R 33 J 1/10W | |
| R118 | | | RK73FB2A680J | CHIP R 68 J 1/10W | | R197 | | | RK73FB2A273J | CHIP R 27K J 1/10W | |
| R119,120 | | | RK73FB2A331J | CHIP R 330 J 1/10W | | R198 | | | RK73FB2A103J | CHIP R 10K J 1/10W | |
| R121 | | | RK73FB2A102J | CHIP R 1.0K J 1/10W | | R199,200 | | | RK73FB2A221J | CHIP R 220 J 1/10W | |
| R122,123 | | | RK73FB2A100J | CHIP R 10 J 1/10W | | R201 | | | RK73FB2A473J | CHIP R 47K J 1/10W | |
| R124 | | | RK73FB2A471J | CHIP R 470 J 1/10W | | R202,203 | | | RK73FB2A680J | CHIP R 68 J 1/10W | |
| R125,126 | | | RK73FB2A100J | CHIP R 10 J 1/10W | | R204 | | | RK73FB2A101J | CHIP R 100 J 1/10W | |
| R127 | | | RK73FB2A180J | CHIP R 18 J 1/10W | | R205,206 | | | RK73FB2A471J | CHIP R 470 J 1/10W | |
| R128 | | | RK73FB2A331J | CHIP R 330 J 1/10W | | R207,208 | | | RK73FB2A330J | CHIP R 33 J 1/10W | |
| R130 | | | RK73FB2A331J | CHIP R 330 J 1/10W | | R209 | | | RK73FB2A471J | CHIP R 470 J 1/10W | |
| R131 | | | RK73FB2A101J | CHIP R 100 J 1/10W | | R210 | | | RK73FB2A102J | CHIP R 1.0K J 1/10W | |
| R132 | | | RK73FB2A223J | CHIP R 22K J 1/10W | | R211 | | | RK73FB2A472J | CHIP R 4.7K J 1/10W | |
| R133 | | | RK73FB2A333J | CHIP R 33K J 1/10W | | R212,213 | | | RK73FB2A330J | CHIP R 33 J 1/10W | |
| R134 | | | RK73FB2A122J | CHIP R 1.2K J 1/10W | | R214 | | | RK73FB2A103J | CHIP R 10K J 1/10W | |
| R139 | | | RK73FB2A104J | CHIP R 100K J 1/10W | | R215 | | | RK73FB2A823J | CHIP R 82K J 1/10W | |
| R140 | | | RK73FB2A473J | CHIP R 47K J 1/10W | | R216 | | | RK73FB2A681J | CHIP R 680 J 1/10W | |
| R142 | | | RK73FB2A473J | CHIP R 47K J 1/10W | | R217 | | | RK73FB2A151J | CHIP R 150 J 1/10W | |
| R143 | | | RK73FB2A471J | CHIP R 470 J 1/10W | | R218 | | | RK73FB2A332J | CHIP R 3.3K J 1/10W | |
| R144 | | | RK73FB2A221J | CHIP R 220 J 1/10W | | R219 | | | RK73FB2A103J | CHIP R 10K J 1/10W | |
| R145 | | | RK73FB2A330J | CHIP R 33 J 1/10W | | R220 | | | RK73FB2A101J | CHIP R 100 J 1/10W | |
| R146 | | | RK73FB2A471J | CHIP R 470 J 1/10W | | R221 | | | RK73FB2A102J | CHIP R 1.0K J 1/10W | |
| R147 | | | RK73FB2A562J | CHIP R 5.6K J 1/10W | | R222 | | | RK73FB2A103J | CHIP R 10K J 1/10W | |
| R148 | | | RK73FB2A223J | CHIP R 22K J 1/10W | | R223 | | | RK73FB2A392J | CHIP R 3.9K J 1/10W | |
| R150 | | | RK73FB2A181J | CHIP R 180 J 1/10W | | R224 | | | RK73FB2A332J | CHIP R 3.3K J 1/10W | |
| R154 | | | RK73FB2A471J | CHIP R 470 J 1/10W | | R225 | | | RK73FB2A223J | CHIP R 22K J 1/10W | |
| R156 | | | RK73FB2A330J | CHIP R 33 J 1/10W | | R226 | | | RK73FB2A562J | CHIP R 5.6K J 1/10W | |
| R157 | | | RK73FB2A182J | CHIP R 1.8K J 1/10W | | R229 | | | RK73FB2A103J | CHIP R 10K J 1/10W | |
| R158 | | | RK73FB2A330J | CHIP R 33 J 1/10W | | R230 | | | RK73FB2A152J | CHIP R 1.5K J 1/10W | |
| R159 | | | RK73FB2A101J | CHIP R 100 J 1/10W | | R231,232 | | | RK73FB2A221J | CHIP R 220 J 1/10W | |
| R160,161 | | | RK73FB2A222J | CHIP R 2.2K J 1/10W | | R233 | | | RK73FB2A152J | CHIP R 1.5K J 1/10W | |
| R162 | | | RK73FB2A101J | CHIP R 100 J 1/10W | | R234 | | | RK73FB2A101J | CHIP R 100 J 1/10W | |
| R163 | | | RK73FB2A332J | CHIP R 3.3K J 1/10W | | R235 | | | RK73FB2A152J | CHIP R 1.5K J 1/10W | |
| R164 | | | RK73FB2A152J | CHIP R 1.5K J 1/10W | | R236,237 | | | RK73FB2A101J | CHIP R 100 J 1/10W | |
| R165 | | | RK73FB2A4473J | CHIP R 47K J 1/10W | | R238 | | | RK73FB2A152J | CHIP R 1.5K J 1/10W | |
| R166 | | | RK73FB2A222J | CHIP R 2.2K J 1/10W | | R239 | | | RK73FB2A101J | CHIP R 100 J 1/10W | |
| R167 | | | RK73FB2A101J | CHIP R 100 J 1/10W | | R240 | | | RK73FB2A152J | CHIP R 1.5K J 1/10W | |
| R168 | | | RK73FB2A393J | CHIP R 39K J 1/10W | | R241,242 | | | RK73FB2A331J | CHIP R 330 J 1/10W | |
| R169 | | | RK73FB2A102J | CHIP R 1.0K J 1/10W | | R243 | | | RK73FB2A152J | CHIP R 1.5K J 1/10W | |
| R170 | | | RK73FB2A223J | CHIP R 22K J 1/10W | | R244 | | | RK73FB2A101J | CHIP R 100 J 1/10W | |
| R171,172 | | | RK73FB2A101J | CHIP R 100 J 1/10W | | R245 | | | RK73FB2A152J | CHIP R 1.5K J 1/10W | |
| R173 | | | RK73FB2A393J | CHIP R 39K J 1/10W | | R246 | | | RK73FB2A221J | CHIP R 220 J 1/10W | |
| R174 | | | RK73FB2A223J | CHIP R 22K J 1/10W | | R248 | | | RK73FB2A822J | CHIP R 8.2K J 1/10W | |
| R175 | | | RK73FB2A102J | CHIP R 1.0K J 1/10W | | R249 | | | RK73FB2A222J | CHIP R 2.2K J 1/10W | |
| R176 | | | RK73FB2A103J | CHIP R 10K J 1/10W | | R250 | | | RK73FB2A103J | CHIP R 10K J 1/10W | |
| R177 | | | RK73FB2A153J | CHIP R 15K J 1/10W | | R251 | | | RK73FB2A153J | CHIP R 15K J 1/10W | |
| R178 | | | RK73FB2A563J | CHIP R 56K J 1/10W | | R252 | | | RK73FB2A102J | CHIP R 1.0K J 1/10W | |
| R179 | | | RK73FB2A103J | CHIP R 10K J 1/10W | | R253 | | | RK73FB2A472J | CHIP R 4.7K J 1/10W | |
| R180 | | | RK73FB2A104J | CHIP R 100K J 1/10W | | R256 | | | RK73FB2A472J | CHIP R 4.7K J 1/10W | |
| R181 | | | RK73FB2A222J | CHIP R 2.2K J 1/10W | | R257 | | | RK73FB2A101J | CHIP R 100 J 1/10W | |
| R182 | | | RK73FB2A103J | CHIP R 10K J 1/10W | | R258 | | | RK73FB2A331J | CHIP R 330 J 1/10W | |
| R183 | | | RK73FB2A470J | CHIP R 47 J 1/10W | | R259 | | | RK73FB2A104J | CHIP R 100K J 1/10W | |
| R184 | | | RK73FB2A121J | CHIP R 120 J 1/10W | | R260 | | | RK73FB2A102J | CHIP R 1.0K J 1/10W | |
| R185 | | | RK73FB2A103J | CHIP R 10K J 1/10W | | R261 | | | RK73FB2A331J | CHIP R 330 J 1/10W | |
| R186 | | | RK73FB2A562J | CHIP R 5.6K J 1/10W | | R262 | | | RK73FB2A102J | CHIP R 1.0K J 1/10W | |
| R188 | | | RK73FB2A470J | CHIP R 47 J 1/10W | | R263 | | | RK73FB2A332J | CHIP R 3.3K J 1/10W | |
| R189 | | | RK73FB2A152J | CHIP R 1.5K J 1/10W | | R264 | | | RK73FB2A222J | CHIP R 2.2K J 1/10W | |
| R190 | | | RK73FB2A103J | CHIP R 10K J 1/10W | | R265 | | | RK73FB2A272J | CHIP R 2.7K J 1/10W | |
| R191 | | | RK73FB2A151J | CHIP R 150 J 1/10W | | R266 | | | RK73FB2A332J | CHIP R 3.3K J 1/10W | |
| R192 | | | RK73FB2A102J | CHIP R 1.0K J 1/10W | | R267 | | | RK73FB2A822J | CHIP R 8.2K J 1/10W | |

TS-870S

PARTS LIST

RF UNIT (X44-3210-00)

| Ref. No. | Address | New parts | Parts No. | Description | Desti-nation | Ref. No. | Address | New parts | Parts No. | Description | Desti-nation |
|----------|---------|-----------|--------------|---------------------|--------------|----------|---------|-----------|--------------|---------------------|--------------|
| R268 | | | RK73FB2A273J | CHIP R 27K J 1/10W | | R517-519 | | | RK73FB2A470J | CHIP R 47 J 1/10W | |
| R269 | | | RK73FB2A103J | CHIP R 10K J 1/10W | | R520 | | | RK73FB2A101J | CHIP R 100 J 1/10W | |
| R271 | | | RK73FB2A224J | CHIP R 220K J 1/10W | | R521 | | | RK73FB2A223J | CHIP R 22K J 1/10W | |
| R272 | | | RK73FB2A104J | CHIP R 100K J 1/10W | | R522 | | | RK73FB2A331J | CHIP R 330 J 1/10W | |
| R276 | | | RK73FB2A474J | CHIP R 470K J 1/10W | | R523 | | | RK73FB2A470J | CHIP R 47 J 1/10W | |
| R277 | | | RK73FB2A103J | CHIP R 10K J 1/10W | | R524,525 | | | RK73FB2A102J | CHIP R 1.0K J 1/10W | |
| R278 | | | RK73FB2A224J | CHIP R 220K J 1/10W | | R526 | | | RK73FB2A331J | CHIP R 330 J 1/10W | |
| R279 | | | RK73FB2A473J | CHIP R 47K J 1/10W | | R527 | | | RK73FB2A680J | CHIP R 68 J 1/10W | |
| R280 | | | RK73FB2A223J | CHIP R 22K J 1/10W | | R528 | | | RK73FB2A391J | CHIP R 390 J 1/10W | |
| R281 | | | RK73FB2A222J | CHIP R 2.2K J 1/10W | | R529 | | | RK73FB2A680J | CHIP R 68 J 1/10W | |
| R284 | | | RK73FB2A224J | CHIP R 220K J 1/10W | | R530 | | | RK73FB2A103J | CHIP R 10K J 1/10W | |
| R285 | | | RK73FB2A103J | CHIP R 10K J 1/10W | | R531 | | | RK73FB2A222J | CHIP R 2.2K J 1/10W | |
| R286 | | | RK73FB2A101J | CHIP R 100 J 1/10W | | R532 | | | RK73FB2A151J | CHIP R 150 J 1/10W | |
| R287 | | | RK73FB2A103J | CHIP R 10K J 1/10W | | R533 | | | RK73FB2A680J | CHIP R 68 J 1/10W | |
| R288 | | | RK73FB2A472J | CHIP R 4.7K J 1/10W | | R534 | | | RK73FB2A101J | CHIP R 100 J 1/10W | |
| R289 | | | RK73FB2A103J | CHIP R 10K J 1/10W | | R535 | | | RK73FB2A471J | CHIP R 470 J 1/10W | |
| R290,291 | | | RK73FB2A472J | CHIP R 4.7K J 1/10W | | R536 | | | RK73FB2A470J | CHIP R 47 J 1/10W | |
| R292,293 | | | RK73FB2A681J | CHIP R 680 J 1/10W | | R537 | | | RK73FB2A220J | CHIP R 22 J 1/10W | |
| R294-297 | | | RK73FB2A224J | CHIP R 220K J 1/10W | | R545 | | | RK73FB2A103J | CHIP R 10K J 1/10W | |
| R298 | | | RK73FB2A472J | CHIP R 4.7K J 1/10W | | R546 | | | RK73FB2A821J | CHIP R 820 J 1/10W | |
| R320 | | | RK73FB2A472J | CHIP R 4.7K J 1/10W | | R547 | | | RK73FB2A331J | CHIP R 330 J 1/10W | |
| R322,323 | | | RK73FB2A223J | CHIP R 22K J 1/10W | | R548,549 | | | RK73FB2A470J | CHIP R 47 J 1/10W | |
| R324 | | | RK73FB2A101J | CHIP R 100 J 1/10W | | R550 | | | RK73FB2A181J | CHIP R 180 J 1/10W | |
| R325 | | | RK73FB2A102J | CHIP R 1.0K J 1/10W | | R551 | | | RK73FB2A221J | CHIP R 220 J 1/10W | |
| R329 | | | RK73FB2A224J | CHIP R 220K J 1/10W | | R552 | | | RK73FB2A101J | CHIP R 100 J 1/10W | |
| R330 | | | RK73FB2A104J | CHIP R 100K J 1/10W | | R553 | | | RK73FB2A333J | CHIP R 33K J 1/10W | |
| R331 | | | RK73FB2A684J | CHIP R 680K J 1/10W | | R554 | | | RK73FB2A682J | CHIP R 6.8K J 1/10W | |
| R332 | | | RK73FB2A103J | CHIP R 10K J 1/10W | | R555,556 | | | RK73FB2A101J | CHIP R 100 J 1/10W | |
| R333 | | | RK73FB2A680J | CHIP R 68 J 1/10W | | R557 | | | RK73FB2A221J | CHIP R 220 J 1/10W | |
| R334 | | | RK73FB2A391J | CHIP R 390 J 1/10W | | R558 | | | RK73FB2A101J | CHIP R 100 J 1/10W | |
| R335 | | | RK73FB2A272J | CHIP R 2.7K J 1/10W | | R559,560 | | | RK73FB2A473J | CHIP R 47K J 1/10W | |
| R336,337 | | | RK73FB2A104J | CHIP R 100K J 1/10W | | R561,562 | | | RK73FB2A101J | CHIP R 100 J 1/10W | |
| R338 | | | RK73FB2A154J | CHIP R 150K J 1/10W | | R563 | | | RK73FB2A102J | CHIP R 1.0K J 1/10W | |
| R339 | | | RK73FB2A224J | CHIP R 220K J 1/10W | | R564 | | | RK73FB2A681J | CHIP R 680 J 1/10W | |
| R340 | | | RK73FB2A101J | CHIP R 100 J 1/10W | | R565 | | | RK73FB2A101J | CHIP R 100 J 1/10W | |
| R351-362 | | | RK73FB2A103J | CHIP R 10K J 1/10W | | R566 | | | RK73FB2A471J | CHIP R 470 J 1/10W | |
| R363 | | | R92-0670-05 | CHIP R 0 OHM | | R567 | | | RK73FB2A221J | CHIP R 220 J 1/10W | |
| R380 | | | RK73FB2A682J | CHIP R 6.8K J 1/10W | | R570,571 | | | RK73FB2A222J | CHIP R 2.2K J 1/10W | |
| R381 | | | RK73FB2A183J | CHIP R 18K J 1/10W | | R572 | | | RK73FB2A272J | CHIP R 2.7K J 1/10W | |
| R382 | | | RK73FB2A181J | CHIP R 180 J 1/10W | | R580-583 | | | RK73FB2A223J | CHIP R 22K J 1/10W | |
| R383-385 | | | R92-0670-05 | CHIP R 0 OHM | | R584 | | | RK73FB2A101J | CHIP R 100 J 1/10W | |
| R386 | | | RK73FB2A330J | CHIP R 33 J 1/10W | | R586 | | | RK73FB2A682J | CHIP R 6.8K J 1/10W | |
| R500 | | | RK73FB2A103J | CHIP R 10K J 1/10W | | R587 | | | RK73FB2A473J | CHIP R 47K J 1/10W | |
| R501 | | | RK73FB2A470J | CHIP R 47 J 1/10W | | R588,589 | | | RK73FB2A101J | CHIP R 100 J 1/10W | |
| R502 | | | RK73FB2A331J | CHIP R 330 J 1/10W | | R591 | | | RK73FB2A682J | CHIP R 6.8K J 1/10W | |
| R503 | | | RK73FB2A472J | CHIP R 4.7K J 1/10W | | R592 | | | RK73FB2A473J | CHIP R 47K J 1/10W | |
| R504 | | | RK73FB2A681J | CHIP R 680 J 1/10W | | R593,594 | | | RK73FB2A101J | CHIP R 100 J 1/10W | |
| R505 | | | RK73FB2A561J | CHIP R 560 J 1/10W | | R596 | | | RK73FB2A682J | CHIP R 6.8K J 1/10W | |
| R506 | | | RK73FB2A333J | CHIP R 33K J 1/10W | | R597 | | | RK73FB2A473J | CHIP R 47K J 1/10W | |
| R507 | | | RK73FB2A101J | CHIP R 100 J 1/10W | | R598,599 | | | RK73FB2A101J | CHIP R 100 J 1/10W | |
| R508 | | | RK73FB2A272J | CHIP R 2.7K J 1/10W | | R601 | | | RK73FB2A682J | CHIP R 6.8K J 1/10W | |
| R509 | | | RK73FB2A681J | CHIP R 680 J 1/10W | | R602 | | | RK73FB2A473J | CHIP R 47K J 1/10W | |
| R510 | | | RK73FB2A470J | CHIP R 47 J 1/10W | | R603 | | | RK73FB2A101J | CHIP R 100 J 1/10W | |
| R511 | | | RK73FB2A122J | CHIP R 1.2K J 1/10W | | R604 | | | RK73FB2A470J | CHIP R 47 J 1/10W | |
| R512 | | | RK73FB2A472J | CHIP R 4.7K J 1/10W | | R605 | | | RK73FB2A392J | CHIP R 3.9K J 1/10W | |
| R513 | | | RK73FB2A103J | CHIP R 10K J 1/10W | | R606 | | | RK73FB2A103J | CHIP R 10K J 1/10W | |
| R514 | | | RK73FB2A220J | CHIP R 22 J 1/10W | | R608 | | | RK73FB2A471J | CHIP R 470 J 1/10W | |
| R515 | | | RK73FB2A331J | CHIP R 330 J 1/10W | | R609,610 | | | RK73FB2A103J | CHIP R 10K J 1/10W | |
| R516 | | | RK73FB2A560J | CHIP R 56 J 1/10W | | R611 | | | RK73FB2A102J | CHIP R 1.0K J 1/10W | |

TS-870S

PARTS LSIT

RF UNIT (X44-3210-00)

| Ref. No. | Address | New parts | Parts No. | Description | | | Desti-nation | Ref. No. | Address | New parts | Parts No. | Description | | | Desti-nation |
|----------|---------|-----------|--------------|---------------|------|---|--------------|-----------|---------|-----------|-------------|-------------------|------|--|--------------|
| R612 | | | RK73FB2A021J | CHIP R | 820 | J | 1/10W | VR3 | | | R12-6427-05 | TRIMMING POT. | 47K | | |
| R613 | | | RK73FB2A271J | CHIP R | 270 | J | 1/10W | VR901-904 | * | | R31-0605-05 | VARIABLE RESISTOR | 100K | | |
| R614 | | | RK73FB2A101J | CHIP R | 100 | J | 1/10W | VR905,906 | * | | R31-0606-05 | VARIABLE RESISTOR | 10K | | |
| R615 | | | RK73FB2A220J | CHIP R | 22 | J | 1/10W | K1-3 | | | S51-1428-05 | RELAY | | | |
| R616 | | | RK73FB2A470J | CHIP R | 47 | J | 1/10W | K4 | | | S51-1420-05 | RELAY | | | |
| R617 | | | RK73FB2A392J | CHIP R | 3.9K | J | 1/10W | S800 | | | S31-2420-05 | SLIDE SWITCH | | | |
| R618 | | | RK73FB2A103J | CHIP R | 10K | J | 1/10W | D1-3 | | | LFB01 | DIODE | | | |
| R619 | | | RK73FB2A220J | CHIP R | 22 | J | 1/10W | D4-7 | | | RLS245 | DIODE | | | |
| R620 | | | RK73FB2A471J | CHIP R | 470 | J | 1/10W | D8 | | | 1SV128 | DIODE | | | |
| R621 | | | RK73FB2A183J | CHIP R | 18K | J | 1/10W | D10 | | | LFB01 | DIODE | | | |
| R622 | | | RK73FB2A122J | CHIP R | 1.2K | J | 1/10W | D11 | | | 1SV128 | DIODE | | | |
| R623 | | | RK73FB2A102J | CHIP R | 1.0K | J | 1/10W | D12 | | | RLS135 | DIODE | | | |
| R624 | | | RK73FB2A334J | CHIP R | 330K | J | 1/10W | D13 | | | 1SV128 | DIODE | | | |
| R625 | | | RK73FB2A182J | CHIP R | 1.8K | J | 1/10W | D14 | | | RLS135 | DIODE | | | |
| R626 | | | RK73FB2A331J | CHIP R | 330 | J | 1/10W | D15 | | | 1SV128 | DIODE | | | |
| R627 | | | RK73FB2A102J | CHIP R | 1.0K | J | 1/10W | D16 | | | RLS135 | DIODE | | | |
| R628 | | | RK73FB2A101J | CHIP R | 100 | J | 1/10W | D17 | | | 1SV128 | DIODE | | | |
| R629 | | | RK73FB2A821J | CHIP R | 820 | J | 1/10W | D18 | | | RLS135 | DIODE | | | |
| R630 | | | RK73FB2A822J | CHIP R | 8.2K | J | 1/10W | D19 | | | 1SV128 | DIODE | | | |
| R631 | | | RK73FB2A103J | CHIP R | 10K | J | 1/10W | D20 | | | RLS135 | DIODE | | | |
| R632 | | | RK73FB2A102J | CHIP R | 1.0K | J | 1/10W | D21 | | | 1SV128 | DIODE | | | |
| R633 | | | RK73FB2A181J | CHIP R | 180 | J | 1/10W | D22 | | | RLS135 | DIODE | | | |
| R634 | | | RK73FB2A331J | CHIP R | 330 | J | 1/10W | D23 | | | 1SV128 | DIODE | | | |
| R635 | | | RK73FB2A823J | CHIP R | 82K | J | 1/10W | D24 | | | RLS135 | DIODE | | | |
| R636 | | | RK73FB2A333J | CHIP R | 33K | J | 1/10W | D25 | | | 1SV128 | DIODE | | | |
| R637 | | | RK73FB2A101J | CHIP R | 100 | J | 1/10W | D26 | | | RLS135 | DIODE | | | |
| R638 | | | RK73FB2A470J | CHIP R | 47 | J | 1/10W | D27 | | | 1SV128 | DIODE | | | |
| R639 | | | RK73FB2A682J | CHIP R | 6.8K | J | 1/10W | D28 | | | RLS135 | DIODE | | | |
| R640 | | | RK73FB2A102J | CHIP R | 1.0K | J | 1/10W | D29 | | | 1SV128 | DIODE | | | |
| R641 | | | RK73FB2A151J | CHIP R | 150 | J | 1/10W | D30 | | | RLS135 | DIODE | | | |
| R642 | | | RK73FB2A150J | CHIP R | 15 | J | 1/10W | D31 | | | 1SV128 | DIODE | | | |
| R643 | | | RK73FB2A447J | CHIP R | 470 | J | 1/10W | D32 | | | RLS135 | DIODE | | | |
| R644 | | | RK73FB2A103J | CHIP R | 10K | J | 1/10W | D33 | | | 1SV128 | DIODE | | | |
| R645 | | | RK73FB2A392J | CHIP R | 3.9K | J | 1/10W | D35 | | | RLS135 | DIODE | | | |
| R646 | | | RK73FB2A822J | CHIP R | 8.2K | J | 1/10W | D36 | | | 1SV128 | DIODE | | | |
| R647 | | | RK73FB2A102J | CHIP R | 1.0K | J | 1/10W | D37 | | | RLS135 | DIODE | | | |
| R648 | | | RK73FB2A684J | CHIP R | 680K | J | 1/10W | D38,39 | | | 1SV128 | DIODE | | | |
| R649 | | | RK73FB2A182J | CHIP R | 1.8K | J | 1/10W | D40 | | | RLS135 | DIODE | | | |
| R650 | | | RK73FB2A103J | CHIP R | 10K | J | 1/10W | D41 | | | 1SV128 | DIODE | | | |
| R651 | | | RK73FB2A472J | CHIP R | 4.7K | J | 1/10W | D42,43 | | | DAN235K | DIODE | | | |
| R652 | | | RK73FB2A103J | CHIP R | 10K | J | 1/10W | D46 | | | HSM88ASR | DIODE | | | |
| R653 | | | RK73FB2A104J | CHIP R | 100K | J | 1/10W | D47 | | | LFB01 | DIODE | | | |
| R655-656 | | | RK73FB2A103J | CHIP R | 10K | J | 1/10W | D49 | | | 1SV172 | DIODE | | | |
| R657 | | | RK73FB2A471J | CHIP R | 470 | J | 1/10W | D50 | | | RD6.2M(B1) | ZENER DIODE | | | |
| R658 | | | RK73FB2A101J | CHIP R | 100 | J | 1/10W | D51 | | | B30-2004-05 | LED | | | |
| R659 | | | RK73FB2A470J | CHIP R | 47 | J | 1/10W | D52 | | | RD12M(B2) | ZENER DIODE | | | |
| R690-697 | | | RK73FB2A221J | CHIP R | 220 | J | 1/10W | D53,54 | | | 1SS355 | DIODE | | | |
| R699 | | | RK73FB2A102J | CHIP R | 1.0K | J | 1/10W | D55 | | | RD3.0M(B2) | ZENER DIODE | | | |
| R710-712 | | | RK73FB2A103J | CHIP R | 10K | J | 1/10W | D56 | | | 1SS355 | DIODE | | | |
| R800 | | | RK73FB2A223J | CHIP R | 22K | J | 1/10W | D57 | | | B30-2004-05 | LED | | | |
| R801 | | | RK73FB2A103J | CHIP R | 10K | J | 1/10W | D58 | | | LFB01 | DIODE | | | |
| R802 | | | RK73FB2A222J | CHIP R | 2.2K | J | 1/10W | D59 | | | 1SS355 | DIODE | | | |
| R803 | | | RK73FB2A271J | CHIP R | 270 | J | 1/10W | D60,61 | | | DAN202K | DIODE | | | |
| R804 | | | RK73FB2A101J | CHIP R | 100 | J | 1/10W | D62-69 | | | 1SV128 | DIODE | | | |
| R901-902 | | | RK73FB2A101J | CHIP R | 100 | J | 1/10W | D70 | | | RD6.2M(B1) | ZENER DIODE | | | |
| R903-906 | | | RK73FB2A101J | CHIP R | 100 | J | 1/10W | D71 | | | RD4.7M(B2) | ZENER DIODE | | | |
| R908-920 | | | RK73FB2A101J | CHIP R | 100 | J | 1/10W | D72 | | | 1SS355 | DIODE | | | |
| R925-928 | | | RK73FB2B221J | CHIP R | 220 | J | 1/8W | D500 | | | 1SV166 | DIODE | | | |
| VR2 | | | R12-6417-05 | TRIMMING POT. | 1K | | | | | | | | | | |

TS-870S

PARTS LIST

RF UNIT (X44-3210-00)
FINAL UNIT (X45-351X-XX)

| Ref. No. | Address | New parts | Parts No. | Description | Desti-nation | Ref. No. | Address | New parts | Parts No. | Description | Desti-nation |
|-----------|---------|-----------|--------------|----------------------------|--------------|----------|---------|-----------|---------------|-----------------------|--------------|
| D501 | | | RLS73 | DIODE | | Q65 | | | 2SA1162(Y) | TRANSISTOR | |
| D502 | | | 1SV166 | DIODE | | Q66 | | | DTC114EK | DIGITAL TRANSISTOR | |
| D503 | | | RLS73 | DIODE | | Q70 | | | DTC114EK | DIGITAL TRANSISTOR | |
| D504 | | | 1SV166 | DIODE | | Q71 | | | DTA114EK | DIGITAL TRANSISTOR | |
| D505 | | | RLS73 | DIODE | | Q500-503 | | | 2SC2712(Y) | TRANSISTOR | |
| D506 | | | 1SV166 | DIODE | | Q504-505 | | | 2SK508NV(K53) | FET | |
| D507 | | | RLS73 | DIODE | | Q506-508 | | | 2SC2712(Y) | TRANSISTOR | |
| D508 | | | 1SS181 | DIODE | | Q510,511 | | | 2SC2712(Y) | TRANSISTOR | |
| IC1,2 | | | TG9174F | IC (CMOS I/O EXTENSION) | | Q512-514 | | | 2SC2714(Y) | TRANSISTOR | |
| IC6 | | | NJM2904M | IC (OP AMP X2) | | Q515 | | | 2SC2712(Y) | TRANSISTOR | |
| IC7 | | | M62363FP | IC (8bit D/A CONVERTER) | | Q516-519 | | | DTC114EK | DIGITAL TRANSISTOR | |
| IC8 | | | NJM2902M | IC (OP AMP X4) | | Q520-523 | | | 2SK508NV(K53) | FET | |
| IC9 | | | NJM2903M | IC (COMPARATOR X2) | | Q524,525 | | | 2SC2714(Y) | TRANSISTOR | |
| IC10 | | | NJM78L05UA | IC (VOLTAGE REGULATOR/+5V) | | Q526 | | | 2SC2996(Y,D) | TRANSISTOR | |
| IC500-502 | | | F71022 | IC (DDS) | | Q527-529 | | | 2SC3722(KR) | TRANSISTOR | |
| IC503 | | | UPD74HC390G | IC (DUAL DECADE COUNTER) | | Q530 | | | 2SC2712(Y) | TRANSISTOR | |
| IC505,506 | | | SN16913P | IC (DUBLE BALANCED MIXERS) | | Q531 | | | 2SC2714(Y) | TRANSISTOR | |
| IC507 | | | MB86001PF | IC | | Q532 | | | 2SC2954 | TRANSISTOR | |
| IC508 | | | SN76514N | IC (MIXER) | | Q533 | | | DTA124EK | DIGITAL TRANSISTOR | |
| IC509 | | | MB86001PF | IC | | Q534-536 | | | 2SC3722(KR) | TRANSISTOR | |
| IC510 | | | TA78L09F | IC (VOLTAGE REGULATOR/+9V) | | Q537 | | | 2SD1757K | TRANSISTOR | |
| IC511 | * | | TA78DS09F | IC | | Q539 | | | 2SC2714(Y) | TRANSISTOR | |
| PL1,2 | * | | B30-2134-05 | LAMP | | Q800 | | | 2SC2714(Y) | TRANSISTOR | |
| Q1 | | | DTA124EK | DIGITAL TRANSISTOR | | TH1 | | | 157-101-53019 | THERMISTOR 100 | |
| Q2 | | | DTC124EK | DIGITAL TRANSISTOR | | TH2 | | | 157-302-53008 | THERMISTOR 3K | |
| Q3 | | | FMA1 | TRANSISTOR | | TH3 | | | 157-101-53019 | THERMISTOR 100 | |
| Q5 | | | 2SC2954 | TRANSISTOR | | TH4 | | | 157-302-53008 | THERMISTOR 3K | |
| Q6 | | | 2SC2712(Y) | TRANSISTOR | | S901,902 | | * | W02-1687-15 | ENCODER (FILTER) | |
| Q7-12 | | | FMG4 | TRANSISTOR | | S903 | | * | W02-1861-05 | ENCODER (RIT/XIT) | |
| Q13 | | | 3SK131(M) | FET | | S904 | | * | W02-1660-15 | ENCODER (M.CH/VFO.CH) | |
| Q14,15 | * | | 2SK2218(5) | FET | | A501 | 2F | | X58-3390-03 | SUB UNIT (VC02) | |
| Q16 | | | 2SC2954 | TRANSISTOR | | | | | | | |
| Q17-20 | | | 2SK520(K44) | FET | | | | | | | |
| Q21 | | | 2SD1624(S) | TRANSISTOR | | | | | | | |
| Q22 | | | 2SC2714(Y) | TRANSISTOR | | | | | | | |
| Q23,24 | | | 3SK131(M) | FET | | | | | | | |
| Q26,27 | | | 2SK520(K43) | FET | | | | | | | |
| Q28-32 | | | 2SC2712(Y) | TRANSISTOR | | | | | | | |
| Q33 | | | 3SK131(M) | FET | | | | | | | |
| Q35,36 | | | 3SK184(R) | FET | | | | | | | |
| Q37-39 | | | 3SK131(M) | FET | | | | | | | |
| Q42 | | | DTC124EK | DIGITAL TRANSISTOR | | | | | | | |
| Q43,44 | | | 2SC2712(Y) | TRANSISTOR | | | | | | | |
| Q45,46 | | | DTC143TK | DIGITAL TRANSISTOR | | | | | | | |
| Q47 | | | 2SC2712(Y) | TRANSISTOR | | | | | | | |
| Q48 | | | DTA124EK | DIGITAL TRANSISTOR | | | | | | | |
| Q49 | | | 2SC2712(Y) | TRANSISTOR | | | | | | | |
| Q50 | | | 2SK208(Y) | FET | | | | | | | |
| Q51 | | | DTC124EK | DIGITAL TRANSISTOR | | | | | | | |
| Q52 | | | 2SC2712(Y) | TRANSISTOR | | | | | | | |
| Q54 | | | 2SC2712(Y) | TRANSISTOR | | | | | | | |
| Q55 | | | 2SB1188(Q,R) | TRANSISTOR | | | | | | | |
| Q56 | | | DTC124EK | DIGITAL TRANSISTOR | | | | | | | |
| Q57,58 | | | 2SB1188(Q,R) | TRANSISTOR | | | | | | | |
| Q59,60 | | | DTC143EK | DIGITAL TRANSISTOR | | | | | | | |
| Q61 | | | FMC3 | TRANSISTOR | | | | | | | |
| Q62 | | | DTA143EK | DIGITAL TRANSISTOR | | | | | | | |
| Q63 | | | FMC3 | TRANSISTOR | | | | | | | |
| Q64 | | | DTA143EK | DIGITAL TRANSISTOR | | | | | | | |

FINAL UNIT (X45-351X-XX) 0-00 : K,P,M,M2,X 2-71 : E,E2,E3,E9

| | | | | | |
|----------|---|---------------|---------|---------|------|
| C1 | | CK73FF1H473Z | CHIP C | 0.047UF | Z |
| C2 | | CC73FC1H101J | CHIP C | 100PF | J |
| C3 | | CC45FC2H030C | CERAMIC | 3.0PF | C |
| C4 | | CC73FC1H560J | CHIP C | 56PF | J |
| C5 | | CK73FF1H473Z | CHIP C | 0.047UF | Z |
| C6 | | CE04EW1H010M | ELECTRO | 1.0UF | 50WV |
| C7 | | CK73FB1H103K | CHIP C | 0.010UF | K |
| C8-18 | | CK73FB1H102K | CHIP C | 1000PF | K |
| C19-33 | | CK73FB1H103K | CHIP C | 0.010UF | K |
| C101 | | CM93D2H102J | MICA | 1000PF | J |
| C102 | | CC45FSL2H331J | CERAMIC | 330PF | J |
| C103 | | CC45FSL2H271J | CERAMIC | 270PF | J |
| C104,105 | | CM93D2H102J | MICA | 1000PF | J |
| C106 | | CC45FSL2H151J | CERAMIC | 150PF | J |
| C107 | | CM93D2H222J | MICA | 2200PF | J |
| C108 | * | CC45FSL2H181J | CERAMIC | 180PF | J |
| C109 | * | CC45FSL2H101J | CERAMIC | 100PF | J |
| C110 | | CM93D2H102J | MICA | 1000PF | J |
| C111 | | CM93D2H561J | MICA | 560PF | J |
| C112 | | CC45FSL2H471J | CERAMIC | 470PF | J |
| C113,114 | * | CC45FSL2H181J | CERAMIC | 180PF | J |
| C115 | | CC45FSL2H391J | CERAMIC | 390PF | J |
| C116 | | CC45FSL2H471J | CERAMIC | 470PF | J |

TS-870S

PARTS LSIT

FINAL UNIT (X45-351X-XX)

| Ref. No. | Address | New parts | Parts No. | Description | Desti-nation | Ref. No. | Address | New parts | Parts No. | Description | Desti-nation |
|----------|---------|-----------|---------------|--------------------|--------------|----------|---------|-----------|---------------|---------------------|--------------|
| C117 | | | CC45FSL2H271J | CERAMIC 270PF J | | C436 | | | CK73FB1H102K | CHIP C 1000PF K | |
| C118 | | | CC45FSL2H391J | CERAMIC 390PF J | | C437 | | | CK73FB1H103K | CHIP C 0.010UF K | |
| C119 | * | | CC45FSL2H471J | CERAMIC 470PF J | | C438 | | | CE04EW1H010M | ELECTRO 1.0UF 50WV | |
| C120 | | | CC45FSL2H181J | CERAMIC 180PF J | | C439 | | | CK73FB1H103K | CHIP C 0.010UF K | |
| C121 | | | CC45FSL2H331J | CERAMIC 330PF J | | C450 | | | CK73FB1H103K | CHIP C 0.010UF K | |
| C122 | | | CC45FSL2H820J | CERAMIC 82PF J | | C452-454 | | | CK73FB1H103K | CHIP C 0.010UF K | |
| C123 | | | CC45FSL2H331J | CERAMIC 330PF J | | C455 | | | CK73FB1H102K | CHIP C 1000PF K | |
| C124 | | | CC45FSL2H121J | CERAMIC 120PF J | | C456-458 | | | CK73FB1H103K | CHIP C 0.010UF K | |
| C125 | | | CC45FSL2H270J | CERAMIC 27PF J | | C461 | | | CC73FSL1H221J | CHIP C 220PF J | |
| C126 | | | CC45FSL2H151J | CERAMIC 150PF J | | C465 | | | CK73FB1E104K | CHIP C 0.10UF K | |
| C127 | | | CC45FSL2H471J | CERAMIC 470PF J | | C466-471 | | | CK73FF1C105Z | CHIP C 1.0UF Z | |
| C128 | | | CC45FSL2H270J | CERAMIC 27PF J | | C472,473 | | | CK73FB1E104K | CHIP C 0.10UF K | |
| C129 | | | CC45FSL2H220J | CERAMIC 22PF J | | C479 | | | CE04EW1H010M | ELECTRO 1.0UF 50WV | |
| C130 | | | CC45FSL2H331J | CERAMIC 330PF J | | C480-485 | | | CK73FB1H103K | CHIP C 0.010UF K | |
| C131 | | | CC45FSL2H471J | CERAMIC 470PF J | | C486-488 | | | CK73FB1E104K | CHIP C 0.10UF K | |
| C132 | | | CC45FSL2H680J | CERAMIC 68PF J | | C489 | | | CC73FCH1H470J | CHIP C 47PF J | |
| C133 | | | CC45FSL2H560J | CERAMIC 56PF J | | C490,491 | | | CK73FB1H103K | CHIP C 0.010UF K | |
| C134 | | | CC45FSL2H151J | CERAMIC 150PF J | | C492 | | | CK73FB1E104K | CHIP C 0.10UF K | |
| C135 | | | CC45FSL2H471J | CERAMIC 470PF J | | C493 | | | CK73FB1H103K | CHIP C 0.010UF K | |
| C136 | | | CC45FSL2H560J | CERAMIC 56PF J | | C494-496 | | | CK73FB1E104K | CHIP C 0.10UF K | |
| C137 | | | CC45FSL2H151J | CERAMIC 150PF J | | C497-499 | | | CK73FB1H103K | CHIP C 0.010UF K | |
| C138 | | | CC45FSL2H331J | CERAMIC 330PF J | | C502 | | | CK73FB1E473K | CHIP C 0.047UF K | |
| C139 | | | CC45FSL2H330J | CERAMIC 33PF J | | C503 | | | CK73FB1H102K | CHIP C 1000PF K | |
| C140,141 | | | CC45FSL2H221J | CERAMIC 220PF J | | C504,505 | | | CK73FB1E473K | CHIP C 0.047UF K | |
| C142 | | | CC45FSL2H101J | CERAMIC 100PF J | | C506 | | | CK73FB1E223K | CHIP C 0.022UF K | |
| C143,144 | | | CC45FSL2H151J | CERAMIC 150PF J | | C507 | | | CK73FB1H681K | CHIP C 680PF K | |
| C145 | | | CC45FSL2H210J | CERAMIC 12PF J | | C508,509 | | | CK73FB1E473K | CHIP C 0.047UF K | |
| C146 | | | CC45FSL2H271J | CERAMIC 270PF J | | C510,511 | | | CK73FB1E223K | CHIP C 0.022UF K | |
| C147 | | | CC45FSL2H390J | CERAMIC 39PF J | | C512 | | | CE04EW1C100M | ELECTRO 10UF 16WV | |
| C148,149 | | | CC45FSL2H820J | CERAMIC 82PF J | | C513 | | | CC45FSL2H151J | CERAMIC 150PF J | |
| C150 | | | CC45FSL2H100D | CERAMIC 10PF D | | C514,515 | | | CK73FB1E223K | CHIP C 0.022UF K | |
| C151 | | | CC45FSL2H121J | CERAMIC 120PF J | | C516 | | | CE04EW1E101M | ELECTRO 100UF 25WV | |
| C152 | | | CC45FSL2H470J | CERAMIC 47PF J | | C517 | | | CM93D2H681J | MICA 680PF J | |
| C153 | | | CC45FSL2H330J | CERAMIC 33PF J | | C518,519 | | | C91-1004-05 | CHIP C 6800PF J | |
| C154 | | | CC45FSL2H820J | CERAMIC 82PF J | | C520 | | | CK73FB1H102K | CHIP C 1000PF K | |
| C161 | | | CC45FSL2H100D | CERAMIC 10PF D | | C521 | | | CK73FB1E473K | CHIP C 0.047UF K | |
| C162 | | | CC45FSL2H090D | CERAMIC 9.0PF D | | C522 | | | CE04EW1C100M | ELECTRO 10UF 16WV | |
| C163 | | | CC45FSL2H270J | CERAMIC 27PF J | | C523 | | | CK73FB1E223K | CHIP C 0.022UF K | |
| C301,302 | | | CK73FB1H103K | CHIP C 0.010UF K | | C524 | | | CE04EW1E470M | ELECTRO 47UF 25WV | |
| C304 | | | CK73FCH1H101J | CHIP C 100PF J | | C525 | | | CM73F2H122J | CHIP C 1200PF J | |
| C305 | | | CC73FCH1H181J | CHIP C 180PF J | | C526 | | | CC45FSL2H151J | CERAMIC 150PF J | |
| C306 | | | CC73FCH1H390J | CHIP C 39PF J | | C527 | | | CE04EW1E101M | ELECTRO 100UF 25WV | |
| C401 | | | CE04EW1C470M | ELECTRO 47UF 16WV | | C528,529 | | | CK73FB1E104K | CHIP C 0.10UF K | |
| C402 | | | CE04EW1C100M | ELECTRO 10UF 16WV | | C533 | | | CM73F2H561J | CHIP C 560PF J | |
| C405 | | | CE04EW1E470M | ELECTRO 47UF 25WV | | C550 | | | CK73FB1E104K | CHIP C 0.10UF K | |
| C406,407 | | | CK73FB1E104K | CHIP C 0.10UF K | | C551 | | | CK73FB1H103K | CHIP C 0.010UF K | |
| C408 | | | CE04EW1E470M | ELECTRO 47UF 25WV | | C552,553 | | | CK73FB1H102K | CHIP C 1000PF K | |
| C409 | | | CK73FB1E104K | CHIP C 0.10UF K | | C554 | | | CK73FB1H223K | CHIP C 0.022UF K | |
| C410 | | | CE04EW1C470M | ELECTRO 47UF 16WV | | C557 | | | CK73FB1H102K | CHIP C 1000PF K | |
| C411 | | | CK73FB1H103K | CHIP C 0.010UF K | | C558 | | | CK73FB1H103K | CHIP C 0.010UF K | |
| C412,413 | | | CK73FB1H222K | CHIP C 2200PF K | | C559 | | | CK73FB1E104K | CHIP C 0.10UF K | |
| C414 | | | CE04EW1C330M | ELECTRO 33UF 16WV | | C560-563 | | * | C91-1171-05 | HVC 0.01UF 1KWV | |
| C415,416 | | | CE04EW1C101M | ELECTRO 100UF 16WV | | C601 | | | CK73FB1H103K | CHIP C 0.010UF K | |
| C417 | | | CK73FB1H103K | CHIP C 0.010UF K | | C602 | | | CE04EW1E102M | ELECTRO 1000UF 25WV | |
| C418-420 | | | CK73FB1H102K | CHIP C 1000PF K | | C603 | | | CK73FB1H103K | CHIP C 0.010UF K | |
| C421 | | | CK73FB1H103K | CHIP C 0.010UF K | | C605,606 | | | CK73FB1H103K | CHIP C 0.010UF K | |
| C422 | | | CE04EW1E470M | ELECTRO 47UF 25WV | | C608,609 | | | CK73FB1E104K | CHIP C 0.10UF K | |
| C431-433 | | | CK73FB1H103K | CHIP C 0.010UF K | | C610,611 | | | CK73FB1E473K | CHIP C 0.047UF K | |
| C435 | | | CK73FB1E104K | CHIP C 0.10UF K | | C612,613 | | | CE04EW1E470M | ELECTRO 47UF 25WV | |

TS-870S

PARTS LIST

FINAL UNIT (X45-351X-XX)

| Ref. No. | Address | New parts | Parts No. | Description | Desti-nation | Ref. No. | Address | New parts | Parts No. | Description | Desti-nation |
|-----------|---------|-----------|---------------|-----------------------------------|--------------|----------|---------|-----------|--------------|-----------------------------------|--------------|
| C614 | | | CE04EW1E102M | ELECTRO | 1000UF 25WV | L108 | | | L39-1223-05 | TROIDAL COIL (CORE : L92-0107-05) | |
| C620 | | | CK73FF1E104Z | CHIP C | 0.10UF Z | L109,110 | | | L39-1221-05 | TROIDAL COIL (CORE : L92-0108-05) | |
| C621,622 | | | CE04EW1E470M | ELECTRO | 47UF 25WV | L111 | | | L34-1279-05 | COIL | |
| C623 | | | CK73FF1E104Z | CHIP C | 0.10UF Z | L112 | | | L34-1281-05 | COIL | |
| C701-711 | | | CK73FB1H103K | CHIP C | 0.010UF K | L113 | | | L34-1279-05 | COIL | |
| C712 | | | CE04EW1C471M | ELECTRO | 470UF 16WV | L114 | | | L34-1280-05 | COIL | |
| C713 | | | CK73FB1E103K | CHIP C | 0.010UF K | L115 | | | L34-1281-05 | COIL | |
| C901 | | | CK73FB1H103K | CHIP C | 0.010UF K | L116 | | | L34-1282-05 | COIL | |
| C903 | | | CE04EWV1H2R2M | ELECTRO | 2.2UF 50WV | L301,302 | | | L40-1015-48 | SMALL FIXED INDUCTOR (100UH) | |
| TC1 | | | C05-0030-15 | TRIMMER CAPACITOR | 20PF | L303,304 | | | L34-1035-05 | COIL | |
| CN1,2 | | | E04-0191-05 | RF COAXIAL CABLE SOCKET | | L401 | | | L40-1015-48 | SMALL FIXED INDUCTOR (100UH) | |
| CN3 | | | E40-5469-05 | FLAT CABLE CONNECTOR (12P) | | L450 | | | L40-2215-48 | SMALL FIXED INDUCTOR (220UH) | |
| CN4 | | | E40-5068-05 | PIN CONNECTOR (11P) | | L451 | | | L34-0943-05 | COIL | |
| CN5 | | | E23-0996-05 | TERMINAL (TEST) | | L452 | | | L34-4255-05 | COIL | |
| CN301 | | | E40-3238-05 | PIN CONNECTOR (3P) | | L453 | * | | L40-4711-15 | SMALL FIXED INDUCTOR | |
| CN302-305 | | | E04-0191-05 | RF COAXIAL CABLE SOCKET | | L454 | | | L40-2221-33 | SMALL FIXED INDUCTOR | |
| CN306,307 | | | E23-0996-05 | TERMINAL (TEST) | | L455,456 | | | L34-4254-05 | COIL | |
| CN401 | | | E23-5745-05 | FLAT CABLE CONNECTOR (20P) | | L457,458 | | | L34-4255-05 | COIL | |
| CN402 | | | E40-5469-05 | FLAT CABLE CONNECTOR (12P) | | L460 | | | L40-3395-48 | SMALL FIXED INDUCTOR (3.3UH) | |
| CN403 | | | E40-3242-05 | PIN CONNECTOR (7P) | | L461-465 | | | L40-1092-12 | SMALL FIXED INDUCTOR | |
| CN404 | | | E40-3237-05 | PIN CONNECTOR (2P) | | L466 | | | L40-1592-15 | SMALL FIXED INDUCTOR | |
| CN405 | | | E40-3239-05 | PIN CONNECTOR (4P) | | L501 | * | | L40-1505-48 | SMALL FIXED INDUCTOR (15UH) | |
| CN406 | | | E40-5470-05 | FLAT CABLE CONNECTOR (13P) | | L502 | | | L40-3395-48 | SMALL FIXED INDUCTOR (3.3UH) | |
| CN407 | | | E40-3240-05 | PIN CONNECTOR (5P) | | L503 | | | L39-0481-05 | TROIDAL COIL | |
| CN410 | | | E04-0154-05 | RF COAXIAL CABLE SOCKET | | L504 | | | L33-0617-15 | CHOKE COIL | |
| CN411 | | | E40-3239-05 | PIN CONNECTOR (4P) | | L505,506 | | | L33-0699-05 | CHOKE COIL | |
| CN412 | | | E04-0154-05 | RF COAXIAL CABLE SOCKET | | L507 | | | L39-1257-05 | TROIDAL COIL | |
| CN413 | | | E40-3238-05 | PIN CONNECTOR (3P) | | L508,509 | | | L33-0617-15 | CHOKE COIL | |
| CN501,502 | | | E04-0191-05 | RF COAXIAL CABLE SOCKET | | L510 | | | L39-0482-05 | TROIDAL COIL | |
| CN503 | | | E40-3240-05 | PIN CONNECTOR (5P) | | L511 | | | L33-0651-05 | CHOKE COIL | |
| CN504 | | | E40-3238-05 | PIN CONNECTOR (3P) | | L512 | | | L33-0617-15 | CHOKE COIL | |
| CN505-507 | | | E23-0996-05 | TERMINAL (TEST) | | L513 | | | L39-1209-25 | TROIDAL COIL | |
| CN601 | | | E40-3238-05 | PIN CONNECTOR (3P) | | L514 | * | | L40-1505-48 | SMALL FIXED INDUCTOR (15UH) | |
| CN602 | | | E40-3239-05 | PIN CONNECTOR (4P) | | L515,516 | * | | L92-0150-05 | TROIDAL CORE (W501) | |
| CN603 | | | E40-5470-05 | FLAT CABLE CONNECTOR (13P) | | L520 | | | L40-3985-48 | SMALL FIXED INDUCTOR (390NH) | |
| CN604 | | | E40-3240-05 | PIN CONNECTOR (5P) | | L601 | | | L40-1005-48 | SMALL FIXED INDUCTOR (10UH) | |
| CN605 | | | E40-3237-05 | PIN CONNECTOR (2P) | | L602 | | | L40-1092-12 | SMALL FIXED INDUCTOR | |
| W1 | 1J,2K | * | E37-0539-05 | LEAD WIRE WITH CONNECTOR | | R | 2G,2H | | N67-3010-46 | PAN HEAD SEMS SCREW | |
| W501 | 1J,2J | * | E37-0525-05 | LEAD WIRE WITH TERMINALR | | K | 2G,2H | | N87-3006-46 | BRAZIER HEAD TAPITIE SCREW | |
| W502 | 2J | * | E37-0067-05 | LEAD WIRE WITH MINIPIN PLUG | | | | | | | |
| 202 | 2G | | F29-0014-05 | INSULATING BUSH | | R1 | | | RK73FB2A100J | CHIP R 10 J 1/10W | |
| F401 | | | F06-4029-05 | FUSE (4A 250V) : C/5 | | R2-5 | | | RK73FB2A330J | CHIP R 33 J 1/10W | |
| F601 | | | F53-0093-05 | FUSE (5A 125V) : D/5 | | R6-9 | | | RK73FB2A270J | CHIP R 27 J 1/10W | |
| A401,402 | | | J13-0075-05 | FUSE CLIP : C/5 | | R10 | | | RK73FB2A181J | CHIP R 180 J 1/10W | |
| | | | | | | R11-13 | | | RK73FB2A101J | CHIP R 100 J 1/10W | |
| CF451 | | | L72-0319-05 | CERAMIC FILTER (455KHZ) | | R14 | | | RK73FB2A473J | CHIP R 47K J 1/10W | |
| CF452 | | | L72-0333-05 | CERAMIC FILTER (455KHZ) | | R15 | | | RK73FB2A103J | CHIP R 10K J 1/10W | |
| CF453 | | | L72-0366-05 | CERAMIC FILTER (455KHZ) | | R20 | | | RK73FB2A393J | CHIP R 39K J 1/10W | |
| L1 | | | L40-2221-33 | SMALL FIXED INDUCTOR | | R21 | | | RK73FB2A223J | CHIP R 22K J 1/10W | |
| L2 | | | L39-0480-15 | TROIDAL COIL | | R22 | | | RK73FB2A104J | CHIP R 100K J 1/10W | |
| L3 | | | L40-2221-33 | SMALL FIXED INDUCTOR | | R301-304 | | | RK73FB2A104J | CHIP R 100K J 1/10W | |
| L4-10 | | | L40-1015-48 | SMALL FIXED INDUCTOR (100UH) | | R305 | | | RK73FB2A473J | CHIP R 47K J 1/10W | |
| L101 | | | L39-0491-05 | TROIDAL COIL (CORE : L92-0107-05) | | R401 | | | RK73FB2A100J | CHIP R 10 J 1/10W | |
| L102 | | | L39-0492-05 | TROIDAL COIL (CORE : L92-0107-05) | | R402 | | | RK73FB2A272J | CHIP R 2.7K J 1/10W | |
| L103 | | | L39-0493-05 | TROIDAL COIL (CORE : L92-0107-05) | | R403,404 | | | RK73FB2A273J | CHIP R 27K J 1/10W | |
| L104 | | | L39-1223-05 | TROIDAL COIL (CORE : L92-0107-05) | | R405 | | | RK73FB2A473J | CHIP R 47K J 1/10W | |
| L105 | | | L39-1224-05 | TROIDAL COIL (CORE : L92-0107-05) | | R406 | | | RK73FB2A150J | CHIP R 15 J 1/10W | |
| L106 | | | L39-1225-05 | TROIDAL COIL (CORE : L92-0107-05) | | R407 | | | RK73FB2A221J | CHIP R 220 J 1/10W | |
| L107 | | | L39-1222-05 | TROIDAL COIL (CORE : L92-0107-05) | | R408 | | | RK73FB2A101J | CHIP R 100 J 1/10W | |

TS-870S

PARTS LSIT

FINAL UNIT (X45-351X-XX)

| Ref. No. | Address | New parts | Parts No. | Description | Desti-nation | Ref. No. | Address | New parts | Parts No. | Description | Desti-nation |
|----------|---------|-----------|--------------|---------------------|--------------|-----------|---------|-----------|--------------|-----------------------------|--------------|
| R409,410 | | | R92-1332-05 | CHIP R 160 J 1W | | R511 | | | RK73FB2A151J | CHIP R 150 J 1/10W | |
| R411 | | | RK73FB2A182J | CHIP R 1.8K J 1/10W | | R512,513 | | | R92-1318-05 | CHIP R 100 J 1W | |
| R415 | | | RK73FB2A101J | CHIP R 100 J 1/10W | | R514-517 | | | RS14DB3A5R6J | FL-PROOF RS 5.6 J 1W | |
| R416 | | | RK73FB2A220J | CHIP R 22 J 1/10W | | R518,519 | | | RS14DB3A150J | FL-PROOF RS 15 J 1W | |
| R417 | | | RK73FB2A101J | CHIP R 100 J 1/10W | | R520 | | | RK73FB2A561J | CHIP R 560 J 1/10W | |
| R418 | | | RK73FB2A102J | CHIP R 1.0K J 1/10W | | R521,522 | | * | RS14DB3A5R6J | FL-PROOF RS 5.6 J 1W | |
| R419 | | | RK73FB2A104J | CHIP R 100K J 1/10W | | R530 | | * | R92-2543-05 | FIXED RESISTOR 6.8 1/2W | |
| R420 | | | RK73FB2A102J | CHIP R 1.0K J 1/10W | | R601 | | | RK73FB2A472J | CHIP R 4.7K J 1/10W | |
| R421 | | | RK73FB2A393J | CHIP R 39K J 1/10W | | R701 | | | RK73FB2A103J | CHIP R 10K J 1/10W | |
| R422 | | | RK73FB2A220J | CHIP R 22 J 1/10W | | R702 | | | RK73FB2A101J | CHIP R 100 J 1/10W | |
| R423,424 | | | RK73FB2A331J | CHIP R 330 J 1/10W | | R703-705 | | | RK73FB2A562J | CHIP R 5.6K J 1/10W | |
| R425 | | | RK73FB2A220J | CHIP R 22 J 1/10W | | R706 | | | RK73FB2A472J | CHIP R 4.7K J 1/10W | |
| R426 | | | RK73FB2A103J | CHIP R 10K J 1/10W | | R707 | | | RK73FB2A821J | CHIP R 820 J 1/10W | |
| R427 | | | RK73FB2A102J | CHIP R 1.0K J 1/10W | | R708 | | | RK73FB2A272J | CHIP R 2.7K J 1/10W | |
| R428 | | | RK73FB2A222J | CHIP R 2.2K J 1/10W | | R709 | | | RK73FB2A333J | CHIP R 33K J 1/10W | |
| R429 | | | RK73FB2A102J | CHIP R 1.0K J 1/10W | | R710 | | | R92-1282-05 | CHIP R 10 J 1W | |
| R439 | | | RK73FB2A470J | CHIP R 47 J 1/10W | | R712 | | | R92-1316-05 | CHIP R 39 J 1W | |
| R440 | | | RK73FB2A152J | CHIP R 1.5K J 1/10W | | R713 | | | RK73FB2A471J | CHIP R 470 J 1/10W | |
| R441,442 | | | RK73FB2A332J | CHIP R 3.3K J 1/10W | | R714 | | | RK73FB2A153J | CHIP R 15K J 1/10W | |
| R443,444 | | | RK73FB2A101J | CHIP R 100 J 1/10W | | VR1 | | | R12-6730-05 | TRIMMING POT. 220 | |
| R445,446 | | | RK73FB2A472J | CHIP R 4.7K J 1/10W | | VR501,502 | | | R12-6734-05 | TRIMMING POT. 1K | |
| R447,448 | | | RK73FB2A101J | CHIP R 100 J 1/10W | | W301 | | | R92-0150-05 | JUMPER REST 0 OHM (ANT1) | |
| R449,450 | | | RK73FB2A222J | CHIP R 2.2K J 1/10W | | W303 | | | R92-0150-05 | JUMPER REST 0 OHM (ANT2) | |
| R451,452 | | | RK73FB2A101J | CHIP R 100 J 1/10W | | K1-14 | | | S51-1420-05 | RELAY | |
| R453 | | | RK73FB2A152J | CHIP R 1.5K J 1/10W | | K301 | | | S51-2417-05 | RELAY | |
| R454,455 | | | RK73FB2A332J | CHIP R 3.3K J 1/10W | | K302 | | | S51-1429-05 | RELAY | |
| R456 | | | RK73FB2A333J | CHIP R 33K J 1/10W | | K601 | | | S51-2423-05 | RELAY | |
| R457,458 | | | RK73FB2A104J | CHIP R 100K J 1/10W | | D1,2 | | | 1SS101 | DIODE | |
| R459 | | | RK73FB2A471J | CHIP R 470 J 1/10W | | D3 | | | RLZJ5.1B | ZENER DIODE | |
| R460 | | | RK73FB2A220J | CHIP R 22 J 1/10W | | D4-10 | | | LFB01 | DIODE | |
| R461 | | | RK73FB2A102J | CHIP R 1.0K J 1/10W | | D11 | | | DAP202K | DIODE | |
| R462 | | | RK73FB2A101J | CHIP R 100 J 1/10W | | D301,302 | | | DSA301LA | DIODE | |
| R463,464 | | | RK73FB2A151J | CHIP R 150 J 1/10W | | D303,304 | | | LFB01 | DIODE | |
| R465,466 | | | RK73FB2A471J | CHIP R 470 J 1/10W | | D401 | | | 1SS226 | DIODE | |
| R467-470 | | | RK73FB2A330J | CHIP R 33 J 1/10W | | D402 | | * | RD9.1M(B2) | ZENER DIODE | |
| R471 | | | RK73FB2A102J | CHIP R 1.0K J 1/10W | | D450 | | | DAN235K | DIODE | |
| R472 | | | RK73FB2A104J | CHIP R 100K J 1/10W | | D451-456 | | | 1SV128 | DIODE | |
| R473 | | | RK73FB2A473J | CHIP R 47K J 1/10W | | D457 | | | DAN235K | DIODE | |
| R474 | | | RK73FB2A104J | CHIP R 100K J 1/10W | | D501 | | | MA27T-B | DIODE | |
| R475 | | | RK73FB2A473J | CHIP R 47K J 1/10W | | D502,503 | | | SV03YS | DIODE | |
| R476 | | | RK73FB2A472J | CHIP R 4.7K J 1/10W | | D504 | | | SG-5L(R) | DIODE | |
| R480 | | | RK73FB2A470J | CHIP R 47 J 1/10W | | D601 | | | LFB01 | DIODE | |
| R481 | | | RK73FB2A471J | CHIP R 470 J 1/10W | | D701 | | | DAN202K | DIODE | |
| R482 | | | RK73FB2A330J | CHIP R 33 J 1/10W | | D702 | | | LF801 | DIODE | |
| R483 | | | RK73FB2A221J | CHIP R 220 J 1/10W | | IC1 | | | TC9174F | IC (CMOS I/O EXTENSION) | |
| R484 | | | RK73FB2A223J | CHIP R 22K J 1/10W | | IC402 | | | UPC7805H | IC (VOLTAGE REGULATOR/ +5V) | |
| R485 | | | RK73FB2A822J | CHIP R 8.2K J 1/10W | | IC601,602 | | | UPC7808H | IC (VOLTAGE REGULATOR/ +8V) | |
| R486 | | | RK73FB2A560J | CHIP R 56 J 1/10W | | IC701 | | | NJM2904M | IC (OP AMP X2) | |
| R487-489 | | | RK73FB2A223J | CHIP R 22K J 1/10W | | Q1-4 | | | FMA7 | TRANSISTOR | |
| R490 | | | RK73FB2A681J | CHIP R 680 J 1/10W | | Q5 | | | DTC114EK | DIGITAL TRANSISTOR | |
| R491,492 | | | RK73FB2A471J | CHIP R 470 J 1/10W | | Q6 | | | FMC2 | TRANSISTOR | |
| R501 | | | RK73FB2A101J | CHIP R 100 J 1/10W | | Q10-16 | | | DTB143EK | DIGITAL TRANSISTOR | |
| R502 | | | RK73FB2A331J | CHIP R 330 J 1/10W | | Q401 | | | 2SA1162(Y) | TRANSISTOR | |
| R503 | | | RK73FB2A681J | CHIP R 680 J 1/10W | | Q402,403 | | | 2SC2712(Y) | TRANSISTOR | |
| R504 | | | RK73FB2A331J | CHIP R 330 J 1/10W | | Q404 | | | 2SD1624(S) | TRANSISTOR | |
| R505,506 | | | RK73FB2A6R8J | CHIP R 6.8 J 1/10W | | Q405 | | | 2SD1406(Y) | TRANSISTOR | |
| R507 | | | RK73FB2A681J | CHIP R 680 J 1/10W | | Q460,461 | | | 3SK131(M) | FET | |
| R508,509 | | | R92-0696-05 | CHIP R 33 J 1/4W | | Q470,471 | | | | | |
| R510 | | | RK73FB2A331J | CHIP R 330 J 1/10W | | | | | | | |

TS-870S

PARTS LIST

FINAL UNIT (X45-351X-XX)
AT UNIT (X53-3340-02)

| Ref. No. | Address | New parts | Parts No. | Description | Desti-nation | Ref. No. | Address | New parts | Parts No. | Description | Desti-nation |
|------------------------------|---------|---------------|---------------|-------------------------|--------------|-----------|---------|---------------|----------------------------------|----------------------|--------------|
| Q472 | | | 2SC2712(Y) | TRANSISTOR | | L105-108 | | | L40-1011-14 | SMALL FIXED INDUCTOR | |
| Q475 | | | 3SK131(M) | FET | | L109 | | | L34-1276-15 | COIL | |
| Q501 | | | 2SC1971 | TRANSISTOR | | L110 | | | L39-0479-05 | COIL | |
| Q502,503 | | | 2SC3133 | TRANSISTOR | | L111 | | | L39-0495-05 | COIL | |
| Q504 | | | 2SD1406(Y) | TRANSISTOR | | L112 | | | L39-0494-15 | COIL | |
| Q505,506 | | | 2SC2879 | TRANSISTOR | | T110-112 | | | L92-0117-05 | TROIDAL CORE | |
| Q507 | | | 2SD1406(Y) | TRANSISTOR | | K | 1M,2M | N87-3006-46 | BRAZIER HEAD TAPTITE SCREW | | |
| Q601 | | | DTC143TK | DIGITAL TRANSISTOR | | S | 1M,2M | N88-3006-46 | FLAT HEAD TAPTITE SCREW | | |
| Q701 | | | DTC114TK | DIGITAL TRANSISTOR | | R1,2 | | RD14BB2E101J | RD 100 J 1/4W | | |
| Q702,703 | | | DTD114EK | DIGITAL TRANSISTOR | | R3 | | RK73FB2A102J | CHIP.R. 1.0K J 1/10W | | |
| TH452 | | 157-502-53002 | THERMISTOR | 5K | | R4 | | RD14BB2E560J | RD 56 J 1/4W | | |
| TH701 | | 5TP-41S | THERMISTOR | | | R5,6 | | RK73FB2A181J | CHIP R 180 J 1/10W | | |
| | | | | | | R7-10 | | RK73FB2A103J | CHIP R 10K J 1/10W | | |
| AT UNIT (X53-3340-02) | | | | | | R11 | | RK73FB2A563J | CHIP R 56K J 1/10W | | |
| C1 | | | CC45FSL2H330J | CERAMIC | 33PF J | R12 | | RK73FB2A121J | CHIP R 120 J 1/10W | | |
| C2-8 | | | CK73FB1E103K | CHIP C | 0.010UF K | R13 | | RK73FB2A101J | CHIP R 100 J 1/10W | | |
| C9,10 | | | CK73FB1H102K | CHIP C | 1000PF K | R14 | | RK73FB2A563J | CHIP R 56K J 1/10W | | |
| C11 | | | CK73FB1E103K | CHIP C | 0.010UF K | R15 | | RK73FB2A121J | CHIP R 120 J 1/10W | | |
| C12 | | | CE04EW1C470M | ELECTRO | 47UF 16WV | R16 | | RK73FB2A101J | CHIP R 100 J 1/10W | | |
| C13-15 | | | CK73FB1E103K | CHIP C | 0.010UF K | R17 | | RK73FB2A330J | CHIP R 33 J 1/10W | | |
| C16 | | | CK73EF1E474Z | CHIP C | 0.47UF Z | R18 | | RK73FB2A103J | CHIP R 10K J 1/10W | | |
| C17-19 | | | CK73FB1E103K | CHIP C | 0.010UF K | R19 | | RK73FB2A330J | CHIP R 33 J 1/10W | | |
| C20 | | | CE04EW1C101M | ELECTRO | 100UF 16WV | R20-23 | | RK73FB2A103J | CHIP R 10K J 1/10W | | |
| C21-23 | | | CK73FB1E103K | CHIP C | 0.010UF K | R24,25 | | RD14BB2E100J | RD 10 J 1/4W | | |
| C24 | | | CK73EF1E474Z | CHIP C | 0.47UF Z | R26-30 | | RK73FB2A103J | CHIP R 10K J 1/10W | | |
| C25 | | | CK73FB1E103K | CHIP C | 0.010UF K | R31 | | RK73FB2A472J | CHIP R 4.7K J 1/10W | | |
| C26 | | | CE04EW1C101M | ELECTRO | 100UF 16WV | R32 | | RK73FB2A103J | CHIP R 10K J 1/10W | | |
| C27-37 | | | CK73FB1E103K | CHIP C | 0.010UF K | R33 | | RD14BB2E101J | RD 100 J 1/4W | | |
| C38 | | | CK73FB1H103K | CHIP C | 0.010UF K | R34 | | RK73FB2A472J | CHIP R 4.7K J 1/10W | | |
| C101-103 | | | CK73FB1H103K | CHIP C | 0.010UF K | VR101,102 | 3L | R01-3435-05 | POTENTIOMETER 10K | | |
| C105-108 | | | CK73FB1H103K | CHIP C | 0.010UF K | W12-17 | | R92-0679-05 | CHIP R 0 OHM | | |
| TC1 | | | C05-0031-15 | TRIMMER CAPACITOR | 10PF | W18-28 | | R92-0670-05 | CHIP R 0 OHM | | |
| VC1,2 | 2L | | C02-0023-05 | VARIABLE CAPACITOR | 300PF | W29-31 | | R92-0679-05 | CHIP R 0 OHM | | |
| A5 | 3L | | D40-0633-15 | GEAR ASSY | | W32 | | R92-0670-05 | CHIP R 0 OHM | | |
| CN1,2 | | | E04-0157-05 | RF COAXIAL CABLE SOCKET | | W34 | | R92-0670-05 | CHIP R 0 OHM | | |
| CN3 | | | E40-3239-05 | PIN CONNECTOR (4P) | | W35,36 | | R92-0679-05 | CHIP R 0 OHM | | |
| CN4 | | | E40-3240-05 | PIN CONNECTOR (5P) | | W40 | 2B | * E33-1984-05 | PROCESSED WIRE KIT (to FIL:CN4) | | |
| CN5 | | | E40-3238-05 | PIN CONNECTOR (3P) | | W40 | 2B | * E33-1984-05 | PROCESSED WIRE KIT (to CONT:CN4) | | |
| CN6 | | | E40-3237-05 | PIN CONNECTOR (2P) | | W40 | 2B | * E33-1984-05 | PROCESSED WIRE KIT (to RL:AT1) | | |
| CN7 | | | E40-5068-05 | PIN CONNECTOR (11P) | | K1 | | S51-2407-05 | RELAY | | |
| CN101 | | | E40-5066-05 | PIN CONNECTOR (9P) | | K101-103 | | S76-0401-05 | RELAY | | |
| - | | | F20-1081-04 | INSULATING SHEET | | K105-108 | | S76-0401-05 | RELAY | | |
| A1 | 2M | | F11-1142-22 | SHIELDING CASE | | M1,2 | 3L | T42-0453-05 | DC MOTOR | | |
| A2 | 2M | | F10-1401-23 | SHIELDING PLATE | | D1,2 | | 1SS101 | DIODE | | |
| A3 | 1M | | F11-1143-14 | SHIELDING COVER | | D3-8 | | 1SS226 | DIODE | | |
| A4 | 2M | | F11-1144-14 | SHIELDING COVER | | D10 | | 1S1555 | DIODE | | |
| A6 | 1M | * | F10-2192-04 | SHIELDING COVER | | D101-103 | | 1S1555 | DIODE | | |
| - | | | J61-0307-05 | BAND | | D105-108 | | 1S1555 | DIODE | | |
| L1 | | | L39-0496-05 | COIL | | D109,110 | | RLS73 | DIODE | | |
| L2 | | | L39-0415-25 | COIL | | IC1 | | SN74S74N | IC (ONE SHOT MULTI) | | |
| L3-6 | | | L40-1011-13 | SMALL FIXED INDUCTOR | | IC2,3 | | TC4066BP | IC (ANALOG/DIGITAL SW) | | |
| L7-11 | | | L40-1011-14 | SMALL FIXED INDUCTOR | | IC4,5 | | BA6109U2 | IC (MOTOR DRIVER) | | |
| L12-14 | | | L40-1011-13 | SMALL FIXED INDUCTOR | | IC6 | | NJM2903S | IC (DUAL COMPALATOR) | | |
| L101-103 | | | L40-1011-14 | SMALL FIXED INDUCTOR | | IC7 | | MC78L05M | IC (VOLTAGE REGULATOR/ +5V) | | |

TS-870S

PARTS LSIT

AT UNIT (X53-3340-02)

CONTROL UNIT (X53-356X-XX)

| Ref. No. | Address | New parts | Parts No. | Description | Desti-nation |
|---|---------|-----------|---------------|---------------------|--------------|
| Q1,2 | | | 2SC2714(Y) | TRANSISTOR | |
| Q3 | | | DTC114EK | DIGITAL TRANSISTOR | |
| Q4 | | | 2SA1204(Y) | TRANSISTOR | |
| Q5 | | | DTC114EK | DIGITAL TRANSISTOR | |
| CONTROL UNIT (X53-356X-XX) 0-11 : K,P 0-21 : M 0-22 : M2 0-71 : X 2-71 : E 2-72 : E2 2-73 : E3 2-74 : E9 | | | | | |
| C1,2 | | | CK73GB1H102K | CHIP C 1000PF K | |
| C3 | | | C92-0044-05 | CHIP-ELE 47UF 10WV | |
| C4 | | | CK73GB1H102K | CHIP C 1000PF K | |
| C5 | | | C92-0032-05 | CHIP-ELE 4.7UF 25WV | |
| C6,7 | | | CK73GF1E104Z | CHIP C 0.10UF Z | |
| C8 | | | C92-0037-05 | CHIP-ELE 10UF 16WV | |
| C9 | | | C92-0032-05 | CHIP-ELE 4.7UF 25WV | |
| C10,11 | | | CK73GF1E104Z | CHIP C 0.10UF Z | |
| C12 | | | C92-0037-05 | CHIP-ELE 10UF 16WV | |
| C13 | | | C92-0032-05 | CHIP-ELE 4.7UF 25WV | |
| C14,15 | | | CK73GF1E104Z | CHIP C 0.10UF Z | |
| C16 | | | C92-0037-05 | CHIP-ELE 10UF 16WV | |
| C17-41 | | | CK73GB1H102K | CHIP C 1000PF K | |
| C42 | | | CK73GB1H103K | CHIP C 0.010UF K | |
| C43,44 | | | CK73GB1H102K | CHIP C 1000PF K | |
| C45 | | | C92-0044-05 | CHIP-ELE 47UF 10WV | |
| C46,47 | | | CK73GB1H103K | CHIP C 0.010UF K | |
| C48,49 | | | CC73GCH1H330J | CHIP C 33PF J | |
| C50-54 | | | CK73GB1H103K | CHIP C 0.010UF K | |
| C55 | | | C92-0044-05 | CHIP-ELE 47UF 10WV | |
| C56,57 | | | CK73GF1E104Z | CHIP C 0.10UF Z | |
| C58 | | | CK73GB1H103K | CHIP C 0.010UF K | |
| C59 | | | C92-0044-05 | CHIP-ELE 47UF 10WV | |
| C60 | | | CK73GB1H103K | CHIP C 0.010UF K | |
| C61 | | | C92-0044-05 | CHIP-ELE 47UF 10WV | |
| C62-77 | | | CC73GCH1H101J | CHIP C 100PF J | |
| C78-80 | | | CK73GB1H103K | CHIP C 0.010UF K | |
| C81-88 | | | CC73GCH1H101J | CHIP C 100PF J | |
| C89-93 | | | CK73GB1H103K | CHIP C 0.010UF K | |
| C94-96 | | | C92-0037-05 | CHIP-ELE 10UF 16WV | |
| C97 | | | C92-0044-05 | CHIP-ELE 47UF 10WV | |
| C98-102 | | | CK73GB1H103K | CHIP C 0.010UF K | |
| C103,104 | | | CC73GCH1H220J | CHIP C 22PF J | |
| C105-107 | | | CK73GB1H103K | CHIP C 0.010UF K | |
| C108 | | | C92-0044-05 | CHIP-ELE 47UF 10WV | |
| C109,110 | | | CK73GB1H103K | CHIP C 0.010UF K | |
| C111-113 | | | C92-0023-05 | CHIP-ELE 1.0UF 50WV | |
| C114 | | | CK73GB1H103K | CHIP C 0.010UF K | |
| C115 | | | C92-0023-05 | CHIP-ELE 1.0UF 50WV | |
| C116,117 | | | CK73GB1H103K | CHIP C 0.010UF K | |
| C118-124 | | | CK73GB1H102K | CHIP C 1000PF K | |
| C125,126 | | | CK73GB1H103K | CHIP C 0.010UF K | |
| C127-141 | | | CC73GCH1H101J | CHIP C 100PF J | |
| C142-147 | | | CK73GB1H102K | CHIP C 1000PF K | |
| C148-150 | | | CC73GCH1H101J | CHIP C 100PF J | |
| C152 | | | CC73GCH1H101J | CHIP C 100PF J | |
| C153-175 | | | CK73GB1H102K | CHIP C 1000PF K | |
| C177-183 | | | CK73GB1H102K | CHIP C 1000PF K | |
| C184-187 | | | CK73GB1H103K | CHIP C 0.010UF K | |
| C188-223 | | | CK73GB1H102K | CHIP C 1000PF K | |
| C224,225 | | | CC73GSL1H471J | CHIP C 470PF J | |

| Ref. No. | Address | New parts | Parts No. | Description | Desti-nation |
|----------|---------|-----------|--------------|---------------------------------|--------------|
| C226,227 | | | CK73GB1H103K | CHIP C 0.010UF K | |
| C228,229 | | | CK73GB1H102K | CHIP C 1000PF K | |
| C230 | | | CK73GB1H103K | CHIP C 0.010UF K | |
| C231-233 | | | CK73GB1H102K | CHIP C 1000PF K | |
| C501-509 | | | CK73GB1H103K | CHIP C 0.010UF K | |
| C511-521 | | | CK73GB1H103K | CHIP C 0.010UF K | |
| C522 | | | CK73GB1H102K | CHIP C 1000PF K | |
| C523 | | | CK73GF1E104Z | CHIP C 0.10UF Z | |
| C601-604 | | | CK73GB1H103K | CHIP C 0.010UF K | |
| C605 | | | CK73GF1E104Z | CHIP C 0.10UF Z | |
| C606 | | | CK73GB1H102K | CHIP C 1000PF K | |
| 401 | | 1D | E23-0623-04 | EARTH LUG | |
| CN1,2 | | * | E40-5744-05 | FLAT CABLE CONNECTOR (20P) | |
| CN3 | | * | E40-3239-05 | PIN CONNECTOR (4P) | |
| CN4 | | * | E40-5763-05 | PIN CONNECTOR (12P) | |
| CN5 | | * | E40-5744-05 | FLAT CABLE CONNECTOR (20P) | |
| CN6 | | * | E40-5761-05 | FLAT CABLE CONNECTOR (26P) | |
| CN7 | | * | E40-5742-05 | FLAT CABLE CONNECTOR (13P) | |
| CN8 | | * | E40-5739-05 | FLAT CABLE CONNECTOR (10P) | |
| CN9,10 | | * | E40-5740-05 | FLAT CABLE CONNECTOR (20P) | |
| CN11 | | * | E40-5744-05 | FLAT CABLE CONNECTOR (20P) | |
| CN12 | | * | E02-2015-05 | SOCKET FOR IC | |
| CN501 | | * | E40-5740-05 | FLAT CABLE CONNECTOR (20P) | |
| CN601 | | * | E40-3251-05 | PIN CONNECTOR (7P) | |
| J601 | | * | E06-0858-15 | CYLINDRICAL RECEPTACLE (8P MIC) | |
| A1 | | 3G | F01-1007-04 | HEAT SINK | |
| 402 | | 3G | G02-0574-04 | FLAT SPRING | |
| 403 | | 2A | J19-1570-05 | HOLDER (BATT) | |
| L1-3 | | | L40-4705-48 | SMALL FIXED INDUCTOR (47UH) | |
| L4,5 | | | L40-1292-18 | SMALL FIXED INDUCTOR | |
| L6,7 | | | L40-4705-48 | SMALL FIXED INDUCTOR (47UH) | |
| L8 | | | L40-1292-18 | SMALL FIXED INDUCTOR | |
| L11-25 | | | L40-4705-48 | SMALL FIXED INDUCTOR (47UH) | |
| L26,27 | | | L40-1005-48 | SMALL FIXED INDUCTOR (10UH) | |
| L28 | | | L40-4705-48 | SMALL FIXED INDUCTOR (47UH) | |
| X1 | | * | L77-1589-05 | CRYSTAL RESONATOR (11.0592MHZ) | |
| X2 | | * | L78-0325-05 | RESONATOR (2.0MHZ) | |
| G | | 3G | N32-2606-46 | FLAT HEAD MACHIN SCREW | |
| R1,2 | | | RK73GB1J101J | CHIP R 100 J 1/16W | |
| R3,4 | | | RK73GB1J102J | CHIP R 1.0K J 1/16W | |
| R5 | | | RK73GB1J101J | CHIP R 100 J 1/16W | |
| R6 | | | RK73GB1J473J | CHIP R 47K J 1/16W | |
| R7-9 | | | RK73GB1J102J | CHIP R 1.0K J 1/16W | |
| R10-28 | | | RK73GB1J101J | CHIP R 100 J 1/16W | |
| R29 | | | RK73GB1J105J | CHIP R 1.0M J 1/16W | |
| R30-37 | | | RK73GB1J101J | CHIP R 100 J 1/16W | |
| R39 | | | RK73GB1J102J | CHIP R 1.0K J 1/16W | |
| R40 | | | RK73GB1J471J | CHIP R 470 J 1/16W | |
| R41 | | | RK73GB1J103J | CHIP R 10K J 1/16W | |
| R42 | | | RK73GB1J222J | CHIP R 2.2K J 1/16W | |
| R43,44 | | | RK73GB1J104J | CHIP R 100K J 1/16W | |
| R45 | | | RK73GB1J472J | CHIP R 4.7K J 1/16W | |
| R46 | | | RK73GB1J102J | CHIP R 1.0K J 1/16W | |
| R47 | | | RK73GB1J473J | CHIP R 47K J 1/16W | |
| R48 | | | RK73GB1J102J | CHIP R 1.0K J 1/16W | X |

TS-870S

PARTS LIST

CONTROL UNIT (X53-356X-XX)

| Ref. No. | Address | New parts | Parts No. | Description | Desti-nation | Ref. No. | Address | New parts | Parts No. | Description | Desti-nation |
|----------|---------|-----------|--------------|---------------------|--------------|----------|---------|-----------|--------------|-----------------------------|--------------|
| R49 | | | RK73GB1J473J | CHIP R 47K J 1/16W | | R505 | | | RK73GB1J391J | CHIP R 390 J 1/16W | |
| R51 | | | RK73GB1J473J | CHIP R 47K J 1/16W | | R506 | | | RK73GB1J271J | CHIP R 270 J 1/16W | |
| R52 | | | RK73GB1J103J | CHIP R 10K J 1/16W | | R507 | | | RK73GB1J473J | CHIP R 47K J 1/16W | |
| R53 | | | RK73GB1J102J | CHIP R 1.0K J 1/16W | E3E9M | R508 | | | RK73GB1J391J | CHIP R 390 J 1/16W | |
| R54 | | | RK73GB1J473J | CHIP R 47K J 1/16W | | R509 | | | RK73GB1J271J | CHIP R 270 J 1/16W | |
| R55,56 | | | RK73GB1J103J | CHIP R 10K J 1/16W | | R510 | | | RK73GB1J391J | CHIP R 390 J 1/16W | |
| R57 | | | RK73GB1J102J | CHIP R 1.0K J 1/16W | EE2E3E9 | R511 | | | RK73GB1J271J | CHIP R 270 J 1/16W | |
| R58 | | | RK73GB1J473J | CHIP R 47K J 1/16W | | R512 | | | RK73GB1J391J | CHIP R 390 J 1/16W | |
| R59-68 | | | RK73GB1J103J | CHIP R 10K J 1/16W | | R513 | | | RK73GB1J271J | CHIP R 270 J 1/16W | |
| R69 | | | RK73GB1J102J | CHIP R 1.0K J 1/16W | E2MM2 | R514 | | | RK73GB1J473J | CHIP R 47K J 1/16W | |
| R70 | | | RK73GB1J473J | CHIP R 47K J 1/16W | | R515 | | | RK73GB1J391J | CHIP R 390 J 1/16W | |
| R71,72 | | | RK73GB1J103J | CHIP R 10K J 1/16W | | R516 | | | RK73GB1J271J | CHIP R 270 J 1/16W | |
| R73 | | | RK73GB1J102J | CHIP R 1.0K J 1/16W | E | R517 | | | RK73GB1J391J | CHIP R 390 J 1/16W | |
| R74 | | | RK73GB1J473J | CHIP R 47K J 1/16W | | R518 | | | RK73GB1J271J | CHIP R 270 J 1/16W | |
| R75-85 | | | RK73GB1J103J | CHIP R 10K J 1/16W | | R519 | | | RK73GB1J391J | CHIP R 390 J 1/16W | |
| R86,87 | | | RK73GB1J472J | CHIP R 4.7K J 1/16W | | R520 | | | RK73GB1J271J | CHIP R 270 J 1/16W | |
| R88 | | | RK73GB1J153J | CHIP R 15K J 1/16W | | R521-523 | | | RK73GB1J473J | CHIP R 47K J 1/16W | |
| R89 | | | RK73GB1J334J | CHIP R 330K J 1/16W | | R524 | | | RK73GB1J102J | CHIP R 1.0K J 1/16W | |
| R90-92 | | | RK73GB1J153J | CHIP R 15K J 1/16W | | R525 | | | RK73GB1J473J | CHIP R 47K J 1/16W | |
| R93 | | | RK73GB1J103J | CHIP R 10K J 1/16W | | R526-527 | | | RK73GB1J101J | CHIP R 100 J 1/16W | |
| R94,95 | | | RK73GB1J153J | CHIP R 15K J 1/16W | | R528 | | | RK73GB1J391J | CHIP R 390 J 1/16W | |
| R96 | | | RK73GB1J105J | CHIP R 1.0M J 1/16W | | R529 | | | RK73GB1J271J | CHIP R 270 J 1/16W | |
| R97 | | | RK73GB1J102J | CHIP R 1.0K J 1/16W | | R530 | | | RK73GB1J391J | CHIP R 390 J 1/16W | |
| R98 | | | RK73GB1J473J | CHIP R 47K J 1/16W | | R531 | | | RK73GB1J271J | CHIP R 270 J 1/16W | |
| R99 | | | RK73GB1J102J | CHIP R 1.0K J 1/16W | | R532 | | | RK73GB1J391J | CHIP R 390 J 1/16W | |
| R100-105 | | | RK73GB1J105J | CHIP R 1.0M J 1/16W | | R533 | | | RK73GB1J271J | CHIP R 270 J 1/16W | |
| R107 | | | RK73GB1J105J | CHIP R 1.0M J 1/16W | | R534 | | | RK73GB1J391J | CHIP R 390 J 1/16W | |
| R108-119 | | | RK73GB1J104J | CHIP R 100K J 1/16W | | R535 | | | RK73GB1J271J | CHIP R 270 J 1/16W | |
| R120-130 | | | RK73GB1J101J | CHIP R 100 J 1/16W | | R536-539 | | | RK73GB1J101J | CHIP R 100 J 1/16W | |
| R131 | | | RK73GB1J102J | CHIP R 1.0K J 1/16W | | R540 | | | RK73GB1J473J | CHIP R 47K J 1/16W | |
| R132,133 | | | RK73GB1J103J | CHIP R 10K J 1/16W | | R541,542 | | | RK73GB1J101J | CHIP R 100 J 1/16W | |
| R134-137 | | | RK73GB1J101J | CHIP R 100 J 1/16W | | R543-546 | | | RK73GB1J473J | CHIP R 47K J 1/16W | |
| R138-140 | | | RK73GB1J101J | CHIP R 100 J 1/16W | | R547,548 | | | RK73GB1J103J | CHIP R 10K J 1/16W | |
| R141-144 | | | RK73GB1J102J | CHIP R 1.0K J 1/16W | | R549-555 | | | RK73GB1J473J | CHIP R 47K J 1/16W | |
| R145 | | | RK73GB1J223J | CHIP R 22K J 1/16W | | R556 | | | RK73GB1J103J | CHIP R 10K J 1/16W | |
| R146,147 | | | RK73GB1J473J | CHIP R 47K J 1/16W | | S1 | | | RK73GB1J101J | CHIP R 100 J 1/16W | |
| R148-150 | | | RK73GB1J101J | CHIP R 100 J 1/16W | | S501-545 | * | | RK73GB1J473J | CHIP R 47K J 1/16W | |
| R152-169 | | | RK73GB1J101J | CHIP R 100 J 1/16W | | S546-551 | * | | RK73GB1J103J | CHIP R 10K J 1/16W | |
| R170 | | | RK73GB1J474J | CHIP R 470K J 1/16W | | D1-3 | | | RK73GB1J473J | CHIP R 47K J 1/16W | |
| R171 | | | RK73GB1J102J | CHIP R 1.0K J 1/16W | | D4 | * | | RK73GB1J103J | CHIP R 10K J 1/16W | |
| R172-177 | | | RK73GB1J101J | CHIP R 100 J 1/16W | | D5-12 | | | S1 | SLIDE SWITCH | |
| R179-201 | | | RK73GB1J101J | CHIP R 100 J 1/16W | | D501 | * | | S70-0439-05 | TACT SWITCH | |
| R202 | | | RK73GB1J473J | CHIP R 47K J 1/16W | | D502 | * | | S70-0439-05 | TACT SWITCH | |
| R203-214 | | | RK73GB1J101J | CHIP R 100 J 1/16W | | D510-519 | | | D1-3 | DIODE | |
| R215 | | | RK73GB1J473J | CHIP R 47K J 1/16W | | IC1,2 | | | D4 | ZENER DIODE | |
| R216-222 | | | RK73GB1J101J | CHIP R 100 J 1/16W | | IC3 | | | D5-12 | DIODE | |
| R223 | | | RK73GB1J333J | CHIP R 33K J 1/16W | | IC4 | | | IC3S355 | DIODE | |
| R224 | | | RK73GB1J101J | CHIP R 100 J 1/16W | | IC5 | | | D501 | LED (RED) | |
| R225 | | | RK73GB1J473J | CHIP R 47K J 1/16W | | IC6 | * | | D502 | LED (ORANGE) | |
| R226 | | | RK73GB1J104J | CHIP R 100K J 1/16W | | IC7 | * | | D510-519 | LED (ORANGE) | |
| R227-234 | | | RK73GB1J103J | CHIP R 10K J 1/16W | | IC8 | | | IC1,2 | LED (ORANGE) | |
| R235-237 | | | RK73GB1J102J | CHIP R 1.0K J 1/16W | | IC9 | | | IC3S355 | IC (VOLTAGE REGULATOR/ +5V) | |
| R238-240 | | | RK73GB1J101J | CHIP R 100 J 1/16W | | IC10 | | | D501 | IC (VOLTAGE REGULATOR) | |
| R241 | | | RK73GB1J473J | CHIP R 47K J 1/16W | | IC11 | * | | IC4 | IC (2kbit SERIAL EEPROM) | |
| R242,243 | | | RK73GB1J102J | CHIP R 1.0K J 1/16W | | IC12 | * | | IC5 | IC (BATTERY BACKUP) | |
| R244 | | | RK73GB1J101J | CHIP R 100 J 1/16W | KPMXE | IC13 | | | IC6 | IC (2CH NAND GATE) | |
| R244 | | | RK73GB1J101J | CHIP R 100 J 1/16W | E2E3E9 | IC14 | * | | IC7 | IC (2CH NAND GATE) | |
| R245 | | | RK73GB1J473J | CHIP R 47K J 1/16W | | IC15 | * | | IC8 | IC (4CH MPX/DE-MPX) | |
| R501-504 | | | RK73GB1J473J | CHIP R 47K J 1/16W | | IC9 | * | | IC9 | IC (4CH MPX/DE-MPX) | |
| | | | RK73GB1J473J | CHIP R 47K J 1/16W | | IC10 | * | | TC4052BF | IC (4CH MPX/DE-MPX) | |
| | | | RK73GB1J473J | CHIP R 47K J 1/16W | | IC11 | * | | TC74VHC08F | IC (4CH MPX/DE-MPX) | |
| | | | RK73GB1J473J | CHIP R 47K J 1/16W | | IC12 | * | | TC74VHC24F | IC (4CH MPX/DE-MPX) | |
| | | | RK73GB1J473J | CHIP R 47K J 1/16W | | IC13 | * | | TC74VHC32F | IC (4CH MPX/DE-MPX) | |
| | | | RK73GB1J473J | CHIP R 47K J 1/16W | | IC14 | * | | 27C512RJLVC | IC (4CH MPX/DE-MPX) | |
| | | | RK73GB1J473J | CHIP R 47K J 1/16W | | IC15 | * | | TC74VHC45F | IC (4CH MPX/DE-MPX) | |

TS-870S

PARTS LSIT

CONTROL UNIT (X53-356X-XX)

TX-RX UNIT (X57-4620-00)

| Ref. No. | Address | New parts | Parts No. | Description | Desti-nation |
|-----------|---------|-----------|----------------|------------------------|--------------|
| IC16 | | | CXD1095Q | IC (I/O EXPANDER) | |
| IC17,18 | | * | TC74VHC138F | IC | |
| IC19 | | * | TC74VHC573F | IC | |
| IC20,21 | | | LZ92K371 | IC (ENCODER PROCESSOR) | |
| IC22,23 | | | CXD1095Q | IC (I/O EXPANDER) | |
| IC24 | | * | 68HC05G2419553 | IC | |
| IC25,26 | | | TC4584BF | IC (BUFF) | |
| IC27 | | * | ADM232LAR | IC | |
| IC28 | | | NJM2904M | IC (OP AMP X2) | |
| IC29 | | | TC7S32F | IC (2CH NAND GATE) | |
| IC501-504 | | | UPD6345GS | IC | |
| Q1 | | | DTA143EK | DIGITAL TRANSISTOR | |
| Q2 | | | DTC143EK | DIGITAL TRANSISTOR | |
| Q3,4 | | | DTC114EK | DIGITAL TRANSISTOR | |
| Q5 | | | DTC143EK | DIGITAL TRANSISTOR | |
| Q6-11 | | | DTC114EK | DIGITAL TRANSISTOR | |
| Q12,13 | | | DTA143EK | DIGITAL TRANSISTOR | |
| Q14-22 | | | DTC143EK | DIGITAL TRANSISTOR | |
| Q23,24 | | | DTA143EK | DIGITAL TRANSISTOR | |
| Q27,28 | | | DTC114EK | DIGITAL TRANSISTOR | |
| Q29-31 | | | DTC143TK | DIGITAL TRANSISTOR | |
| Q33 | | | DTC143EK | DIGITAL TRANSISTOR | |
| Q501,502 | | | DTC114EK | DIGITAL TRANSISTOR | |

TX-RX UNIT (X57-4620-00)

| | | | | | | | |
|--------|--|--|---------------|---------|---------|------|--|
| C1 | | | C90-2045-05 | ELECTRO | 2.2UF | 25WV | |
| C2,3 | | | CK73FF1E104Z | CHIP C | 0.10UF | Z | |
| C4,5 | | | CC73FCH1H330J | CHIP C | 33PF | J | |
| C6 | | | C90-2045-05 | ELECTRO | 2.2UF | 25WV | |
| C7,8 | | | CK73FF1E104Z | CHIP C | 0.10UF | Z | |
| C9-14 | | | CC73FCH1H330J | CHIP C | 33PF | J | |
| C15 | | | CC73FSL1H152J | CHIP C | 1500PF | J | |
| C16 | | | CC73FCH1H101J | CHIP C | 100PF | J | |
| C17 | | | CC73FSL1H152J | CHIP C | 1500PF | J | |
| C18 | | | CC73FCH1H101J | CHIP C | 100PF | J | |
| C19-22 | | | CK73FF1E104Z | CHIP C | 0.10UF | Z | |
| C23 | | | C90-2045-05 | ELECTRO | 2.2UF | 25WV | |
| C24 | | | CK73FB1H223K | CHIP C | 0.022UF | K | |
| C25 | | | CK73FF1E104Z | CHIP C | 0.10UF | Z | |
| C26,27 | | | CK73FB1H223K | CHIP C | 0.022UF | K | |
| C28 | | | C90-2045-05 | ELECTRO | 2.2UF | 25WV | |
| C29 | | | CK73FF1E104Z | CHIP C | 0.10UF | Z | |
| C30 | | | CK73GB1H102K | CHIP C | 1000PF | K | |
| C31 | | | CK73FB1H471K | CHIP C | 470PF | K | |
| C32 | | | CK73FF1E104Z | CHIP C | 0.10UF | Z | |
| C33 | | | CK73GB1H102K | CHIP C | 1000PF | K | |
| C34 | | | C90-2045-05 | ELECTRO | 2.2UF | 25WV | |
| C36 | | | CC73GCH1H330J | CHIP C | 33PF | J | |
| C37 | | | CK73GB1H102K | CHIP C | 1000PF | K | |
| C38 | | | CK73GB1H103K | CHIP C | 0.010UF | K | |
| C39,40 | | | CK73FB1H102K | CHIP C | 1000PF | K | |
| C41 | | | C90-2045-05 | ELECTRO | 2.2UF | 25WV | |
| C42 | | | CK73FB1H103K | CHIP C | 0.010UF | K | |
| C44 | | | CK73GB1H102K | CHIP C | 1000PF | K | |
| C45 | | | CC73FCH1H21J | CHIP C | 120PF | J | |
| C46 | | | CK73GB1H102K | CHIP C | 1000PF | K | |
| C50 | | | CK73GB1H102K | CHIP C | 1000PF | K | |

| Ref. No. | Address | New parts | Parts No. | Description | Desti-nation | |
|----------|---------|-----------|---------------|-------------|--------------|------|
| C52 | | | CE04EW1C470M | ELECTRO | 47UF | 16WV |
| C53 | | | CK73GB1E223K | CHIP C | 0.022UF | K |
| C54 | | | CQ92FM1H154K | MYLAR | 0.15UF | K |
| C55 | | | CK73FB1H102K | CHIP C | 1000PF | K |
| C56 | | | CE04EW1C101M | ELECTRO | 100UF | 16WV |
| C57 | | | CC73ECH1H202J | CHIP C | 2000PF | J |
| C58 | | | CK73FB1H103K | CHIP C | 0.010UF | K |
| C59 | | | CC73GCH1H680J | CHIP C | 68PF | J |
| C60 | | | CC73GCH1H180J | CHIP C | 18PF | J |
| C61 | | | CC73GCH1H060D | CHIP C | 6.0PF | D |
| C62 | | | CC73GCH1H470J | CHIP C | 47PF | J |
| C63 | | | CK73GB1H103K | CHIP C | 0.010UF | K |
| C64 | | | CE04EW1C101M | ELECTRO | 100UF | 16WV |
| C65,66 | | | CK73GB1H102K | CHIP C | 1000PF | K |
| C67 | | | CE04EW1C470M | ELECTRO | 47UF | 16WV |
| C68,69 | | | CK73GB1H102K | CHIP C | 1000PF | K |
| C100 | | | CE04EW1C100M | ELECTRO | 10UF | 16WV |
| C101 | | | CK73FF1E104Z | CHIP C | 0.10UF | Z |
| C103 | | | CE04EW1H010M | ELECTRO | 1.0UF | 50WV |
| C104 | | | CE04EW1C100M | ELECTRO | 10UF | 16WV |
| C105 | | | CK73GB1H102K | CHIP C | 1000PF | K |
| C106 | | | CC73FCH1H102J | CHIP C | 1000PF | J |
| C107 | | | CK73FF1E104Z | CHIP C | 0.10UF | Z |
| C108 | | | CE04EW1C100M | ELECTRO | 10UF | 16WV |
| C109 | | | CK73FF1E104Z | CHIP C | 0.10UF | Z |
| C112 | | | CC73FCH1H102J | CHIP C | 1000PF | J |
| C113,114 | | | CQ92FM1H223K | MYLAR | 0.022UF | K |
| C116 | | | CC73FCH1H102J | CHIP C | 1000PF | J |
| C118,119 | | | CC73GCH1H271J | CHIP C | 270PF | J |
| C120 | | | CE04EW1C100M | ELECTRO | 10UF | 16WV |
| C121 | | | CE04EW1H010M | ELECTRO | 1.0UF | 50WV |
| C122 | | | CC73FSL1H152J | CHIP C | 1500PF | J |
| C123 | | | CC73GCH1H101J | CHIP C | 100PF | J |
| C124 | | | CC73GCH1H221J | CHIP C | 220PF | J |
| C125 | | | CK73GB1E223K | CHIP C | 0.022UF | K |
| C126 | | | CE04EW1C100M | ELECTRO | 10UF | 16WV |
| C127 | | | CK73GB1H103K | CHIP C | 0.010UF | K |
| C128 | | | CC73FSL1H221J | CHIP C | 220PF | J |
| C129 | | | CC73FCH1H101J | CHIP C | 100PF | J |
| C130 | | | CE04EW1C100M | ELECTRO | 10UF | 16WV |
| C131 | | | CK73FF1E104Z | CHIP C | 0.10UF | Z |
| C132 | | | CE04EW1C100M | ELECTRO | 10UF | 16WV |
| C133 | | | CC73GCH1H101J | CHIP C | 100PF | J |
| C134 | | | CK73GB1E223K | CHIP C | 0.022UF | K |
| C135 | | | CE04EW1C100M | ELECTRO | 10UF | 16WV |
| C136 | | | CK73GB1E223K | CHIP C | 0.022UF | K |
| C137 | | | CC73FCH1H102J | CHIP C | 1000PF | J |
| C138 | | | CC73GCH1H221J | CHIP C | 220PF | J |
| C139 | | | CC73GCH1H271J | CHIP C | 270PF | J |
| C140,141 | | | CK73GB1E223K | CHIP C | 0.022UF | K |
| C142 | | | CE04EW1C100M | ELECTRO | 10UF | 16WV |
| C143 | | | CK73GB1E223K | CHIP C | 0.022UF | K |
| C144 | | | CQ92FM1H683K | MYLAR | 0.068UF | K |
| C145 | | | CK73FB1E104K | CHIP C | 0.10UF | K |
| C146,147 | | | CC73FCH1H102J | CHIP C | 1000PF | J |
| C150 | | | CK73GB1E223K | CHIP C | 0.022UF | K |
| C151 | | | CE04EW1C100M | ELECTRO | 10UF | 16WV |
| C152 | | | CC73FCH1H102J | CHIP C | 1000PF | J |
| C153 | | | CC73GCH1H271J | CHIP C | 270PF | J |

TS-870S

PARTS LIST

TX-RX UNIT (X57-4620-00)

| Ref. No. | Address | New parts | Parts No. | Description | Desti-nation | Ref. No. | Address | New parts | Parts No. | Description | Desti-nation |
|----------|---------|-----------|----------------|--------------------|--------------|----------|---------|-----------|----------------|----------------------------|--------------|
| C154 | | | CK73GB1E223K | CHIP C 0.022UF K | | C303,304 | | | CC73FCH1H101J | CHIP C 100PF J | |
| C155 | | | CE04EW1C100M | ELECTRO 10UF 16WV | | C305 | | | CC73GCH1H101J | CHIP C 100PF J | |
| C156 | | | CK73FF1E104Z | CHIP C 0.10UF Z | | C306,307 | | | CC73FCH1H101J | CHIP C 100PF J | |
| C157 | | | CK73GB1E223K | CHIP C 0.022UF K | | C308 | | | CC73GCH1H101J | CHIP C 100PF J | |
| C158 | | | C90-2045-05 | ELECTRO 2.2UF 25WV | | C309,310 | | | CC73FCH1H101J | CHIP C 100PF J | |
| C159,160 | | | CK73FF1E104Z | CHIP C 0.10UF Z | | C312,313 | | | CC73FCH1H101J | CHIP C 100PF J | |
| C161 | | | CK73GB1E223K | CHIP C 0.022UF K | | C314 | | | CC73GCH1H101J | CHIP C 100PF J | |
| C162 | | | CE04EW1C100M | ELECTRO 10UF 16WV | | C315 | | | CC73FCH1H101J | CHIP C 100PF J | |
| C163 | | | CK73FF1E104Z | CHIP C 0.10UF Z | | C316-320 | | | CK73FB1H102K | CHIP C 1000PF K | |
| C164 | | | CE04EW1C100M | ELECTRO 10UF 16WV | | C321 | | | CC73FSL1H471J | CHIP C 470PF J | |
| C165 | | | CK73FF1E104Z | CHIP C 0.10UF Z | | C326,327 | | | CK73GB1H102K | CHIP C 1000PF K | |
| C166,167 | | | CE04EW1C100M | ELECTRO 10UF 16WV | | C330-333 | | | CK73FB1H102K | CHIP C 1000PF K | |
| C168,169 | | | CK73FF1E104Z | CHIP C 0.10UF Z | | C334 | | | CK73GB1E223K | CHIP C 0.022UF K | |
| C170 | | | CK73GB1H103K | CHIP C 0.010UF K | | C335 | | | CC73GCH1H331J | CHIP C 330PF J | |
| C171-176 | | | CE04EW1C100M | ELECTRO 10UF 16WV | | C336-340 | | | CK73GB1E223K | CHIP C 0.022UF K | |
| C177 | | | CQ92M1H103K | MYLAR 0.010UF K | | C341 | | | CK73FF1E104Z | CHIP C 0.10UF Z | |
| C178,179 | | | CC73FSL1H1152J | CHIP C 1500PF J | | C342 | | | CC73FSL1H1152J | CHIP C 1500PF J | |
| C180,181 | | | CC73ECH1H202J | CHIP C 2000PF J | | C343 | | | CK73FB1H562K | CHIP C 5600PF K | |
| C182 | | | CC73GCH1H331J | CHIP C 330PF J | | C344 | | | CK73GB1H472K | CHIP C 4700PF K | |
| C183-185 | | | CC73FSL1H1152J | CHIP C 1500PF J | | C345 | | | CK73GB1E223K | CHIP C 0.022UF K | |
| C186 | | | CE04EW1C100M | ELECTRO 10UF 16WV | | C346-348 | | | CC73FCH1H101J | CHIP C 100PF J | |
| C187 | | | CC73GCH1H331J | CHIP C 330PF J | | C349,350 | | | CK73FF1E104Z | CHIP C 0.10UF Z | |
| C188 | | | CK73GB1H562K | CHIP C 5600PF K | | C351 | | | CK73GB1E223K | CHIP C 0.022UF K | |
| C189 | | | CE04EW1C100M | ELECTRO 10UF 16WV | | C355 | | | CE04NW1C100M | ELECTRO 10UF 16WV | |
| C190 | | | CC73GCH1H331J | CHIP C 330PF J | | C356 | | | CE04EW1HR47M | ELECTRO 0.47UF 50WV | |
| C191,192 | | | CE04NW1C100M | ELECTRO 10UF 16WV | | C357 | | | CE04EW1C100M | ELECTRO 10UF 16WV | |
| C193 | | | CK73GB1H103K | CHIP C 0.010UF K | | C358-361 | | | CK73FB1H103K | CHIP C 0.010UF K | |
| C194 | | | CE04NW1C100M | ELECTRO 10UF 16WV | | C363 | | | CK73GB1H103K | CHIP C 0.010UF K | |
| C195 | | | CE04EW1H010M | ELECTRO 1.0UF 50WV | | C364 | | | C90-2045-05 | ELECTRO 2.2UF 25WV | |
| C196,197 | | | CE04NW1C100M | ELECTRO 10UF 16WV | | C365-375 | | | CK73FB1H471K | CHIP C 470PF K | |
| C198 | | | CE04EW1C100M | ELECTRO 10UF 16WV | | C376 | | | CK73GB1E223K | CHIP C 0.022UF K | |
| C199,200 | | | CE04NW1C220M | ELECTRO 22UF 16WV | | C377-379 | | | CK73FB1H471K | CHIP C 470PF K | |
| C201,202 | | | CK73FF1E104Z | CHIP C 0.10UF Z | | C381,382 | | | CK73FB1H103K | CHIP C 0.010UF K | |
| C203,204 | | | CE04NW1E47R7M | ELECTRO 4.7UF 25WV | | C383 | | | CK73GB1H102K | CHIP C 1000PF K | |
| C205 | | | CE04EW1C100M | ELECTRO 10UF 16WV | | C384 | | | CK73FB1H102K | CHIP C 1000PF K | |
| C206,207 | | | CK73GF1E104Z | CHIP C 0.10UF Z | | C385 | | | CK73GB1H103K | CHIP C 0.010UF K | |
| C208 | | | CK73GB1E223K | CHIP C 0.022UF K | | C386 | | | CK73FB1H103K | CHIP C 0.010UF K | |
| C209,210 | | | CE04NW1C100M | ELECTRO 10UF 16WV | | C387 | | | CK73GB1H103K | CHIP C 0.010UF K | |
| C212,213 | | | CE04NW1H010M | ELECTRO 1.0UF 50WV | | C388 | | | CK73FB1H471K | CHIP C 470PF K | |
| C214 | | | CK73GB1H472K | CHIP C 4700PF K | | C389,390 | | | CK73GB1H471K | CHIP C 470PF K | |
| C215,216 | | | CE04EW1C100M | ELECTRO 10UF 16WV | | C391-394 | | | CK73FB1H103K | CHIP C 0.010UF K | |
| C218,219 | | | CK73EF1E474Z | CHIP C 0.47UF Z | | C395 | | | CK73GB1H103K | CHIP C 0.010UF K | |
| C221,222 | | | CK73FB1H102K | CHIP C 1000PF K | | C400 | | | CC73FSL1H471J | CHIP C 470PF J | |
| C223 | | | CE04EW1C471M | ELECTRO 470UF 16WV | | C401 | | | CK73FB1H103K | CHIP C 0.010UF K | |
| C224 | | | CE04EW1C100M | ELECTRO 10UF 16WV | | C402 | | | C90-2167-05 | ELECTRO 100UF 16WV | |
| C225 | | | CE04EW1C470M | ELECTRO 47UF 16WV | | CN1 | | | E40-3239-05 | PIN CONNECTOR (4P) | |
| C226 | | | CE04EW1C101M | ELECTRO 100UF 16WV | | CN3 | | | E40-3239-05 | PIN CONNECTOR (4P) | |
| C227 | | | CE04EW1C100M | ELECTRO 10UF 16WV | | CN4 | | | E40-3242-05 | PIN CONNECTOR (7P) | |
| C228 | | | CE04EW1C101M | ELECTRO 100UF 16WV | | CN5 | | | E40-5747-05 | PIN CONNECTOR (11P) | |
| C229 | | | CE04EW1C100M | ELECTRO 10UF 16WV | | CN6 | | | E40-3243-05 | PIN CONNECTOR (8P) | |
| C230 | | | CE04EW1C471M | ELECTRO 470UF 16WV | | CN7 | | | E40-5736-05 | FLAT CABLE CONNECTOR (26P) | |
| C231,232 | | | CK73EF1E474Z | CHIP C 0.47UF Z | | CN8 | | | E40-5740-05 | FLAT CABLE CONNECTOR (20P) | |
| C233 | | | CQ92M1H154K | MYLAR 0.15UF K | | CN9 | | | E40-3240-05 | PIN CONNECTOR (5P) | |
| C235,236 | | | CK73FB1H102K | CHIP C 1000PF K | | CN10 | | | E40-3238-05 | PIN CONNECTOR (3P) | |
| C237 | | | CE04EW1E471M | ELECTRO 470UF 25WV | | CN11 | | | E40-5741-05 | FLAT CABLE CONNECTOR (8P) | |
| C240 | | | CC73FSL1H1152J | CHIP C 1500PF J | | CN12 | | | E40-3237-05 | PIN CONNECTOR (2P) | |
| C241 | | | CE04EW1H010M | ELECTRO 1.0UF 50WV | | CN13 | | | E04-0191-05 | RF COAXIAL CABLE SOCKET | |
| C300,301 | | | CC73FCH1H101J | CHIP C 100PF J | | CN14-16 | | | E02-2015-05 | SOCKET FOR IC | |
| C302 | | | CC73GCH1H101J | CHIP C 100PF J | | CN17 | | | E40-5067-05 | PIN CONNECTOR (10P) | |

TS-870S

PARTS LSIT

TX-RX UNIT (X57-4620-00)

| Ref. No. | Address | New parts | Parts No. | Description | Desti-nation | Ref. No. | Address | New parts | Parts No. | Description | Desti-nation |
|----------|---------|-----------|--------------|------------------------------|--------------|----------|---------|-----------|--------------|---------------------|--------------|
| J1 | | | E11-0455-05 | PHONE JACK (3.5D) | | R100 | | | RK73FB2A100J | CHIP R 10 J 1/10W | |
| J2 | | | E11-0431-05 | PHONE JACK | | R101 | | | RK73GB1J472J | CHIP R 4.7K J 1/16W | |
| J4 | | | E63-0401-05 | PHONO JACK | | R103 | | | RK73GB1J102J | CHIP R 1.0K J 1/16W | |
| J5 | | | E06-1352-05 | DIN SOCKET | | R104 | | | RK73GB1J472J | CHIP R 4.7K J 1/16W | |
| J6 | | | E11-0455-05 | PHONE JACK (3.5D) | | R105 | | | RK73GB1J102J | CHIP R 1.0K J 1/16W | |
| J7 | | * | E58-0428-05 | SUB PLUG (D) 9P | | R106 | | | RK73GB1J154J | CHIP R 150K J 1/16W | |
| W1 | | * | E37-0536-05 | LEAD WIRE WITH MINIPIN PLUG | | R109 | | | RK73GB1J102J | CHIP R 1.0K J 1/16W | |
| A1 | 4G | * | F01-1005-04 | HEAT SINK | | R110 | | | RK73GB1J223J | CHIP R 22K J 1/16W | |
| A2 | 4F | * | F11-1127-04 | SHIELDING CASE | | R111 | | | RK73GB1J222J | CHIP R 2.2K J 1/16W | |
| A3,4 | 4G | | G02-0574-04 | FLAT SPRING | | R113 | | | RK73GB1J104J | CHIP R 100K J 1/16W | |
| A5 | 4G | | G02-0719-04 | FLAT SPRING | | R114 | | | RK73GB1J472J | CHIP R 4.7K J 1/16W | |
| CF1,2 | | | L72-0374-05 | CERAMIC FILTER (455KHZ) | | R117 | | | RK73GB1J823J | CHIP R 82K J 1/16W | |
| CF3 | | | L72-0366-05 | CERAMIC FILTER (455KHZ) | | R118 | | | RK73GB1J222J | CHIP R 2.2K J 1/16W | |
| L1 | | | L40-2285-48 | SMALL FIXED INDUCTOR (220NH) | | R119,120 | | | RK73GB1J223J | CHIP R 22K J 1/16W | |
| L2 | | | L40-4785-48 | SMALL FIXED INDUCTOR | | R121,122 | | | RK73GB1J123J | CHIP R 12K J 1/16W | |
| L3 | | | L40-1011-15 | SMALL FIXED INDUCTOR | | R123 | | | RK73GB1J223J | CHIP R 22K J 1/16W | |
| L4 | | * | L34-4397-05 | COIL | | R124 | | | RK73GB1J103J | CHIP R 10K J 1/16W | |
| L5 | | * | L40-1011-15 | SMALL FIXED INDUCTOR | | R126 | | | RK73GB1J183J | CHIP R 18K J 1/16W | |
| L8 | | * | L40-4711-15 | SMALL FIXED INDUCTOR | | R127,128 | | | RK73GB1J103J | CHIP R 10K J 1/16W | |
| L9 | | * | L40-1011-15 | SMALL FIXED INDUCTOR | | R129 | | | RK73GB1J472J | CHIP R 4.7K J 1/16W | |
| L10 | | | L40-1092-12 | SMALL FIXED INDUCTOR | | R130 | | | RK73GB1J223J | CHIP R 22K J 1/16W | |
| L11-17 | | | L40-1011-15 | SMALL FIXED INDUCTOR | | R131 | | | RK73GB1J101J | CHIP R 100 J 1/16W | |
| L18 | | | L40-1001-15 | SMALL FIXED INDUCTOR | | R132 | | | RK73GB1J472J | CHIP R 4.7K J 1/16W | |
| L19,20 | | * | L39-1245-05 | COIL | | R133 | | | RK73GB1J103J | CHIP R 10K J 1/16W | |
| L21 | | * | L40-2711-33 | SMALL FIXED INDUCTOR | | R134,135 | | | RK73GB1J152J | CHIP R 1.5K J 1/16W | |
| L22,23 | | * | L40-2201-12 | SMALL FIXED INDUCTOR | | R136 | | | RK73GB1J331J | CHIP R 330 J 1/16W | |
| L24,25 | | | L40-1092-12 | SMALL FIXED INDUCTOR | | R137 | | | RK73FB2A102J | CHIP R 1.0K J 1/10W | |
| L26 | | | L40-1001-15 | SMALL FIXED INDUCTOR | | R138 | | | RK73GB1J152J | CHIP R 1.5K J 1/16W | |
| R1 | | | RK73FB2A103J | CHIP R 10K J 1/10W | | R139 | | | RK73GB1J223J | CHIP R 22K J 1/16W | |
| R2,3 | | | RK73GB1J103J | CHIP R 10K J 1/16W | | R140 | | | RK73GB1J470J | CHIP R 47 J 1/16W | |
| R4-6 | | | RK73GB1J101J | CHIP R 100 J 1/16W | | R141 | | | RK73GB1J392J | CHIP R 3.9K J 1/16W | |
| R7 | | | RK73FB2A103J | CHIP R 10K J 1/10W | | R142,143 | | | RK73GB1J222J | CHIP R 2.2K J 1/16W | |
| R8 | | | RK73GB1J682J | CHIP R 6.8K J 1/16W | | R144 | | | RK73GB1J101J | CHIP R 100 J 1/16W | |
| R9 | | | RK73GB1J222J | CHIP R 2.2K J 1/16W | | R145 | | | RK73GB1J472J | CHIP R 4.7K J 1/16W | |
| R10 | | | RK73GB1J330J | CHIP R 33 J 1/16W | | R146,147 | | | RK73GB1J101J | CHIP R 100 J 1/16W | |
| R11 | | | RK73GB1J183J | CHIP R 18K J 1/16W | | R148 | | | RK73GB1J471J | CHIP R 470 J 1/16W | |
| R12 | | | RK73FB2A103J | CHIP R 10K J 1/10W | | R149 | | | RK73GB1J101J | CHIP R 100 J 1/16W | |
| R13 | | | RK73GB1J101J | CHIP R 100 J 1/16W | | R150 | | | RK73GB1J471J | CHIP R 470 J 1/16W | |
| R16 | | | RK73GB1J680J | CHIP R 68 J 1/16W | | R151 | | | RK73GB1J472J | CHIP R 4.7K J 1/16W | |
| R17,18 | | | RK73FB2A222J | CHIP R 2.2K J 1/10W | | R152 | | | RK73GB1J152J | CHIP R 1.5K J 1/16W | |
| R19 | | | RK73GB1J101J | CHIP R 100 J 1/16W | | R153,154 | | | RK73GB1J331J | CHIP R 330 J 1/16W | |
| R21-24 | | | RK73FB2A103J | CHIP R 10K J 1/10W | | R155 | | | RK73GB1J222J | CHIP R 2.2K J 1/16W | |
| R50 | | | RK73GB1J682J | CHIP R 6.8K J 1/16W | | R156 | | | RK73GB1J332J | CHIP R 3.3K J 1/16W | |
| R51 | | | RK73FB2A104J | CHIP R 100K J 1/10W | | R157 | | | RK73GB1J222J | CHIP R 2.2K J 1/16W | |
| R52 | | | RK73GB1J392J | CHIP R 3.9K J 1/16W | | R158,159 | | | RK73GB1J472J | CHIP R 4.7K J 1/16W | |
| R53 | | | RK73GB1J221J | CHIP R 220 J 1/16W | | R160 | | | RK73GB1J103J | CHIP R 10K J 1/16W | |
| R54 | | | RK73GB1J152J | CHIP R 1.5K J 1/16W | | R161 | | | RK73GB1J222J | CHIP R 2.2K J 1/16W | |
| R55,56 | | | RK73GB1J103J | CHIP R 10K J 1/16W | | R162,163 | | | RK73GB1J331J | CHIP R 330 J 1/16W | |
| R57 | | | RK73GB1J334J | CHIP R 330K J 1/16W | | R164 | | | RK73GB1J222J | CHIP R 2.2K J 1/16W | |
| R58 | | | RK73GB1J470J | CHIP R 47 J 1/16W | | R165 | | | RK73GB1J331J | CHIP R 330 J 1/16W | |
| R59 | | | RK73GB1J151J | CHIP R 150 J 1/16W | | R166 | | | RK73GB1J392J | CHIP R 3.9K J 1/16W | |
| R60 | | | RK73GB1J152J | CHIP R 1.5K J 1/16W | | R167 | | | RK73GB1J472J | CHIP R 4.7K J 1/16W | |
| R61 | | | RK73GB1J333J | CHIP R 33K J 1/16W | | R168 | | | RK73GB1J100J | CHIP R 10 J 1/16W | |
| R62 | | | RK73GB1J223J | CHIP R 22K J 1/16W | | R169 | | | RK73GB1J471J | CHIP R 470 J 1/16W | |
| R63 | | | RK73GB1J102J | CHIP R 1.0K J 1/16W | | R170 | | | RK73GB1J101J | CHIP R 100 J 1/16W | |
| R64,65 | | | RK73GB1J470J | CHIP R 47 J 1/16W | | R171,172 | | | RK73FB2A100J | CHIP R 10 J 1/10W | |
| R66 | | | RK73GB1J221J | CHIP R 220 J 1/16W | | R173 | | | RK73GB1J101J | CHIP R 100 J 1/16W | |
| | | | | | | R174 | | | RK73GB1J123J | CHIP R 12K J 1/16W | |
| | | | | | | R175 | | | RK73FB2A123J | CHIP R 12K J 1/10W | |

PARTS LIST

TX-RX UNIT (X57-4620-00)

| Ref. No. | Address | New parts | Parts No. | Description | | | Desti-nation | Ref. No. | Address | New parts | Parts No. | Description | | | Desti-nation |
|----------|---------|-----------|--------------|-------------|-------|---|--------------|----------|---------|-----------|----------------|-----------------------------|------|---|--------------|
| R176 | | | RK73FB2A183J | CHIP R | 18K | J | 1/10W | R371-374 | | | RK73GB1J473J | CHIP R | 47K | J | 1/16W |
| R177 | | | RK73GB1J183J | CHIP R | 18K | J | 1/16W | R376 | | | RK73GB1J473J | CHIP R | 47K | J | 1/16W |
| R178 | | | RK73FB2A153J | CHIP R | 15K | J | 1/10W | R377,378 | | | RK73FB2A473J | CHIP R | 47K | J | 1/10W |
| R179 | | | RK73GB1J103J | CHIP R | 10K | J | 1/16W | R379 | | | RK73GB1J473J | CHIP R | 47K | J | 1/16W |
| R180 | | | RK73GB1J821J | CHIP R | 820 | J | 1/16W | R380-418 | | | RK73FB2A103J | CHIP R | 10K | J | 1/10W |
| R181 | | | RK73GB1J222J | CHIP R | 2.2K | J | 1/16W | R419-428 | | | RK73GB1J101J | CHIP R | 100 | J | 1/16W |
| R182 | | | RK73GB1J103J | CHIP R | 10K | J | 1/16W | R429 | | | RK73FB2A103J | CHIP R | 10K | J | 1/10W |
| R183 | | | RK73FB2A153J | CHIP R | 15K | J | 1/10W | R430 | | | RK73GB1J472J | CHIP R | 4.7K | J | 1/16W |
| R184 | | | RK73GB1J272J | CHIP R | 2.7K | J | 1/16W | R431,432 | | | RK73GB1J103J | CHIP R | 10K | J | 1/16W |
| R185 | | | RK73GB1J153J | CHIP R | 15K | J | 1/16W | R433 | | | RK73GB1J102J | CHIP R | 1.0K | J | 1/16W |
| R186 | | | RK73FB2A222J | CHIP R | 2.2K | J | 1/10W | R434 | | | RK73GB1J470J | CHIP R | 47 | J | 1/16W |
| R187 | | | RK73GB1J223J | CHIP R | 22K | J | 1/16W | R435,436 | | | RK73GB1J472J | CHIP R | 4.7K | J | 1/16W |
| R188 | | | RK73GB1J101J | CHIP R | 100 | J | 1/16W | VR1,2 | | | R12-6732-05 | TRIMMING POT. | 470 | | |
| R189,190 | | | RK73GB1J153J | CHIP R | 15K | J | 1/16W | VR3 | | | R12-6742-05 | TRIMMING POT. | 22K | | |
| R191,192 | | | RK73GB1J222J | CHIP R | 2.2K | J | 1/16W | D1-4 | | | RLS73 | DIODE | | | |
| R193,194 | | | RK73GB1J223J | CHIP R | 22K | J | 1/16W | D5 | | | 1SV166 | DIODE | | | |
| R196 | | | RK73FB2A472J | CHIP R | 4.7K | J | 1/10W | D7 | | | DAP202K | DIODE | | | |
| R197 | | | RK73GB1J103J | CHIP R | 10K | J | 1/16W | D8 | | | RLS73 | DIODE | | | |
| R198,199 | | | RK73GB1J104J | CHIP R | 100K | J | 1/16W | IC1,2 | | * | DSP56002FC40 | IC | | | |
| R200 | | | RK73FB2A101J | CHIP R | 100 | J | 1/10W | IC3 | | * | MBCG24173-6173 | IC (GATE ARRAY) | | | |
| R201 | | | RK73GB1J221J | CHIP R | 220 | J | 1/16W | IC4 | | * | 27C256PCJJTC-K | IC | | | |
| R202,203 | | | RK73GB1J104J | CHIP R | 100K | J | 1/16W | IC5 | | * | 27C256PCJJUC-K | IC | | | |
| R204 | | | RK73GB1J222J | CHIP R | 2.2K | J | 1/16W | IC6 | | * | 27C256PCJJVC-K | IC | | | |
| R205 | | | RK73GB1J272J | CHIP R | 2.7K | J | 1/16W | IC7 | | * | MCM56824AFN20 | IC | | | |
| R206 | | | RK73GB1J224J | CHIP R | 220K | J | 1/16W | IC7 | | * | MCM56824AFN25 | IC | | | |
| R207 | | | RK73GB1J222J | CHIP R | 2.2K | J | 1/16W | IC9 | | * | 7032LC44JLQA | IC | | | |
| R208 | | | RK73GB1J123J | CHIP R | 12K | J | 1/16W | IC15 | | | MB86001PF | IC | | | |
| R209 | | | RK73GB1J563J | CHIP R | 56K | J | 1/16W | IC16 | | | AK4318-VS | IC | | | |
| R215 | | | RK73GB1J681J | CHIP R | 680 | J | 1/16W | IC17 | | | NJM2100M | IC (OP AMPLIFIER) | | | |
| R220 | | | RK73GB1J103J | CHIP R | 10K | J | 1/16W | IC18 | | | MC74HC4053F | IC (ANALOG SW) | | | |
| R300 | | | RK73FB2A100J | CHIP R | 10 | J | 1/10W | IC19-21 | | | NJM4560M | IC (OP AMP X2) | | | |
| R301 | | | RK73GB1J101J | CHIP R | 100 | J | 1/16W | IC22 | | * | AD822AR | IC | | | |
| R303-319 | | | RK73GB1J101J | CHIP R | 100 | J | 1/16W | IC23 | | | MC74HC4052F | IC (HPF) | | | |
| R320 | | | RK73GB1J102J | CHIP R | 1.0K | J | 1/16W | IC24 | | | NJM2100M | IC (OP AMPLIFIER) | | | |
| R323 | | | RK73GB1J101J | CHIP R | 100 | J | 1/16W | IC25 | | | AK5340-VS | IC (AD CONVERTER (18 Bit)) | | | |
| R325 | | | RK73FB2A473J | CHIP R | 47K | J | 1/10W | IC26 | | | M62363FP | IC (8bit D/A CONVERTER) | | | |
| R330 | | | RK73GB1J470J | CHIP R | 47 | J | 1/16W | IC27 | | | AK4318-VS | IC | | | |
| R331 | | | RK73GB1J102J | CHIP R | 1.0K | J | 1/16W | IC28 | | | NJM2100M | IC (OP AMPLIFIER) | | | |
| R332 | | | RK73GB1J222J | CHIP R | 2.2K | J | 1/16W | IC29 | | | M51131L | IC (ELECTRO VOLUME) | | | |
| R334 | | | RK73GB1J331J | CHIP R | 330 | J | 1/16W | IC30 | | | NJM2100M | IC (OP AMPLIFIER) | | | |
| R335 | | | RK73GB1J101J | CHIP R | 100 | J | 1/16W | IC31 | | | M51131L | IC (ELECTRO VOLUME) | | | |
| R336 | | | RK73GB1J102J | CHIP R | 1.0K | J | 1/16W | IC33 | | | LA4422 | IC (AF POWER AMP/ 5.8W) | | | |
| R337,338 | | | RK73GB1J124J | CHIP R | 120K | J | 1/16W | IC34 | | | PCM69AU | IC (18bit D/A CONVERTOR) | | | |
| R339,340 | | | RK73GB1J334J | CHIP R | 330K | J | 1/16W | IC35 | * | | AD822AR | IC | | | |
| R343 | | | RK73GB1J471J | CHIP R | 470 | J | 1/16W | IC36 | | | NJM4560M | IC (OP AMP X2) | | | |
| R344 | | | RK73FB2A2R2J | CHIP R | 2.2 | J | 1/10W | IC37,38 | | | UPC7805H | IC (VOLTAGE REGULATOR/ +5V) | | | |
| R345,347 | | | RK73GB1J101J | CHIP R | 100 | J | 1/16W | IC39 | | | NJM78L05UA | IC (VOLTAGE REGULATOR/ +5V) | | | |
| R348,349 | | | RK73GB1J473J | CHIP R | 47K | J | 1/16W | IC40 | | | NJM78L08UA | IC (VOLTAGE REGULATOR/ +8V) | | | |
| R350,351 | | | RK73FB2A473J | CHIP R | 47K | J | 1/10W | IC41,42 | | | NJM3404AM | IC (OP AMP X2) | | | |
| R352-354 | | | RK73GB1J473J | CHIP R | 47K | J | 1/16W | IC43 | | | NJM5532M | IC (OP AMP) | | | |
| R355 | | | RK73GB1J103J | CHIP R | 10K | J | 1/16W | IC44 | | | TC7S04F | IC (2CH NAND GATE) | | | |
| R356 | | | RK73GB1J473J | CHIP R | 47K | J | 1/16W | Q1 | | | DTC124EK | DIGITAL TRANSISTOR | | | |
| R357 | | | RK73GB1J103J | CHIP R | 10K | J | 1/16W | Q2,3 | | | 2SC2714(Y) | TRANSISTOR | | | |
| R358 | | | RK73GB1J473J | CHIP R | 47K | J | 1/16W | Q4 | | | DTC124EK | DIGITAL TRANSISTOR | | | |
| R359 | | | RK73GB1J101J | CHIP R | 100 | J | 1/16W | Q5-7 | | | 2SC3324(G) | TRANSISTOR | | | |
| R364,365 | | | RK73GB1J222J | CHIP R | 2.2K | J | 1/16W | Q8 | | | 2SK210(GR) | FET | | | |
| R366 | | | R92-1252-05 | CHIP R | 0 OHM | | | Q9,10 | | | 2SC2714(Y) | TRANSISTOR | | | |
| R367,368 | | | RK73FB2A473J | CHIP R | 47K | J | 1/10W | Q12 | | | 2SC2712(Y) | TRANSISTOR | | | |
| R369 | | | RK73GB1J473J | CHIP R | 47K | J | 1/16W | Q13-17 | | | 2SC2412(KS) | TRANSISTOR | | | |

TS-870S

PARTS LSIT

TX-RX UNIT (X57-4620-00)


VCO2 (X58-3390-03)

| Ref. No. | Address | New parts | Parts No. | Description | Desti-nation |
|----------|---------|-----------|------------|--------------------|--------------|
| Q22 | | | DTC124EK | DIGITAL TRANSISTOR | |
| Q23 | | | 2SC2712(Y) | TRANSISTOR | |
| Q25 | | | DTA143EK | DIGITAL TRANSISTOR | |
| Q26 | | | DTC124KK | DIGITAL TRANSISTOR | |
| Q27 | | | DTC143EK | DIGITAL TRANSISTOR | |

VCO2 (X58-3390-03)

| | | | | | |
|-------|----|---------------|------------------------|--|--|
| - | | B42-2437-04 | S/NO LABEL | | |
| C1 | | CK73FB1H102K | CHIP C 1000PF K | | |
| C2 | | CC73FSL1H101J | CHIP C 100PF J | | |
| C3 | | CC73FCH1H070D | CHIP C 7.0PF D | | |
| C4 | | CC73FCH1H070D | CHIP C 7.0PF D | | |
| C4 | | CC73FCH1H220J | CHIP C 22PF J | | |
| C6 | | CC73FCH1H180J | CHIP C 18PF J | | |
| C7 | | CC73FCH1H120J | CHIP C 12PF J | | |
| C8,9 | | CK73FB1H102K | CHIP C 1000PF K | | |
| C10 | | CC73FCH1H010C | CHIP C 1.0PF C | | |
| C11 | | CK73FB1H102K | CHIP C 1000PF K | | |
| TC1 | | C05-0331-15 | TRIMMER CAPACITOR 10PF | | |
| TP1-3 | | E23-0464-05 | TERMINAL | | |
| - | | F11-1085-04 | SHIELDING CASE | | |
| - | | F11-1086-14 | SHIELDING COVER | | |
| - | | G13-0904-04 | CUSHION (COVER) | | |
| L1 | | L33-0690-05 | CHOKE COIL (3.3UH) | | |
| L2 | | L34-2353-05 | COIL | | |
| T | 2F | N30-2604-41 | PAN HEAD MACHIN SCREW | | |
| R1 | | RK73FB2A682J | CHIP R 6.8K J 1/10W | | |
| R2 | | RK73FB2A271J | CHIP R 270 J 1/10W | | |
| R3 | | RK73FB2A330J | CHIP R 33 J 1/10W | | |
| R4,5 | | RK73FB2A472J | CHIP R 4.7K J 1/10W | | |
| R6 | | RK73FB2A471J | CHIP R 470 J 1/10W | | |
| R7 | | RK73FB2A560J | CHIP R 56 J 1/10W | | |
| D1 | | 1SV164 | DIODE | | |
| Q1 | | 2SK508NV(K52) | FET | | |
| Q2 | | 2SC2714(Y) | TRANSISTOR | | |


EXPLODED VIEW

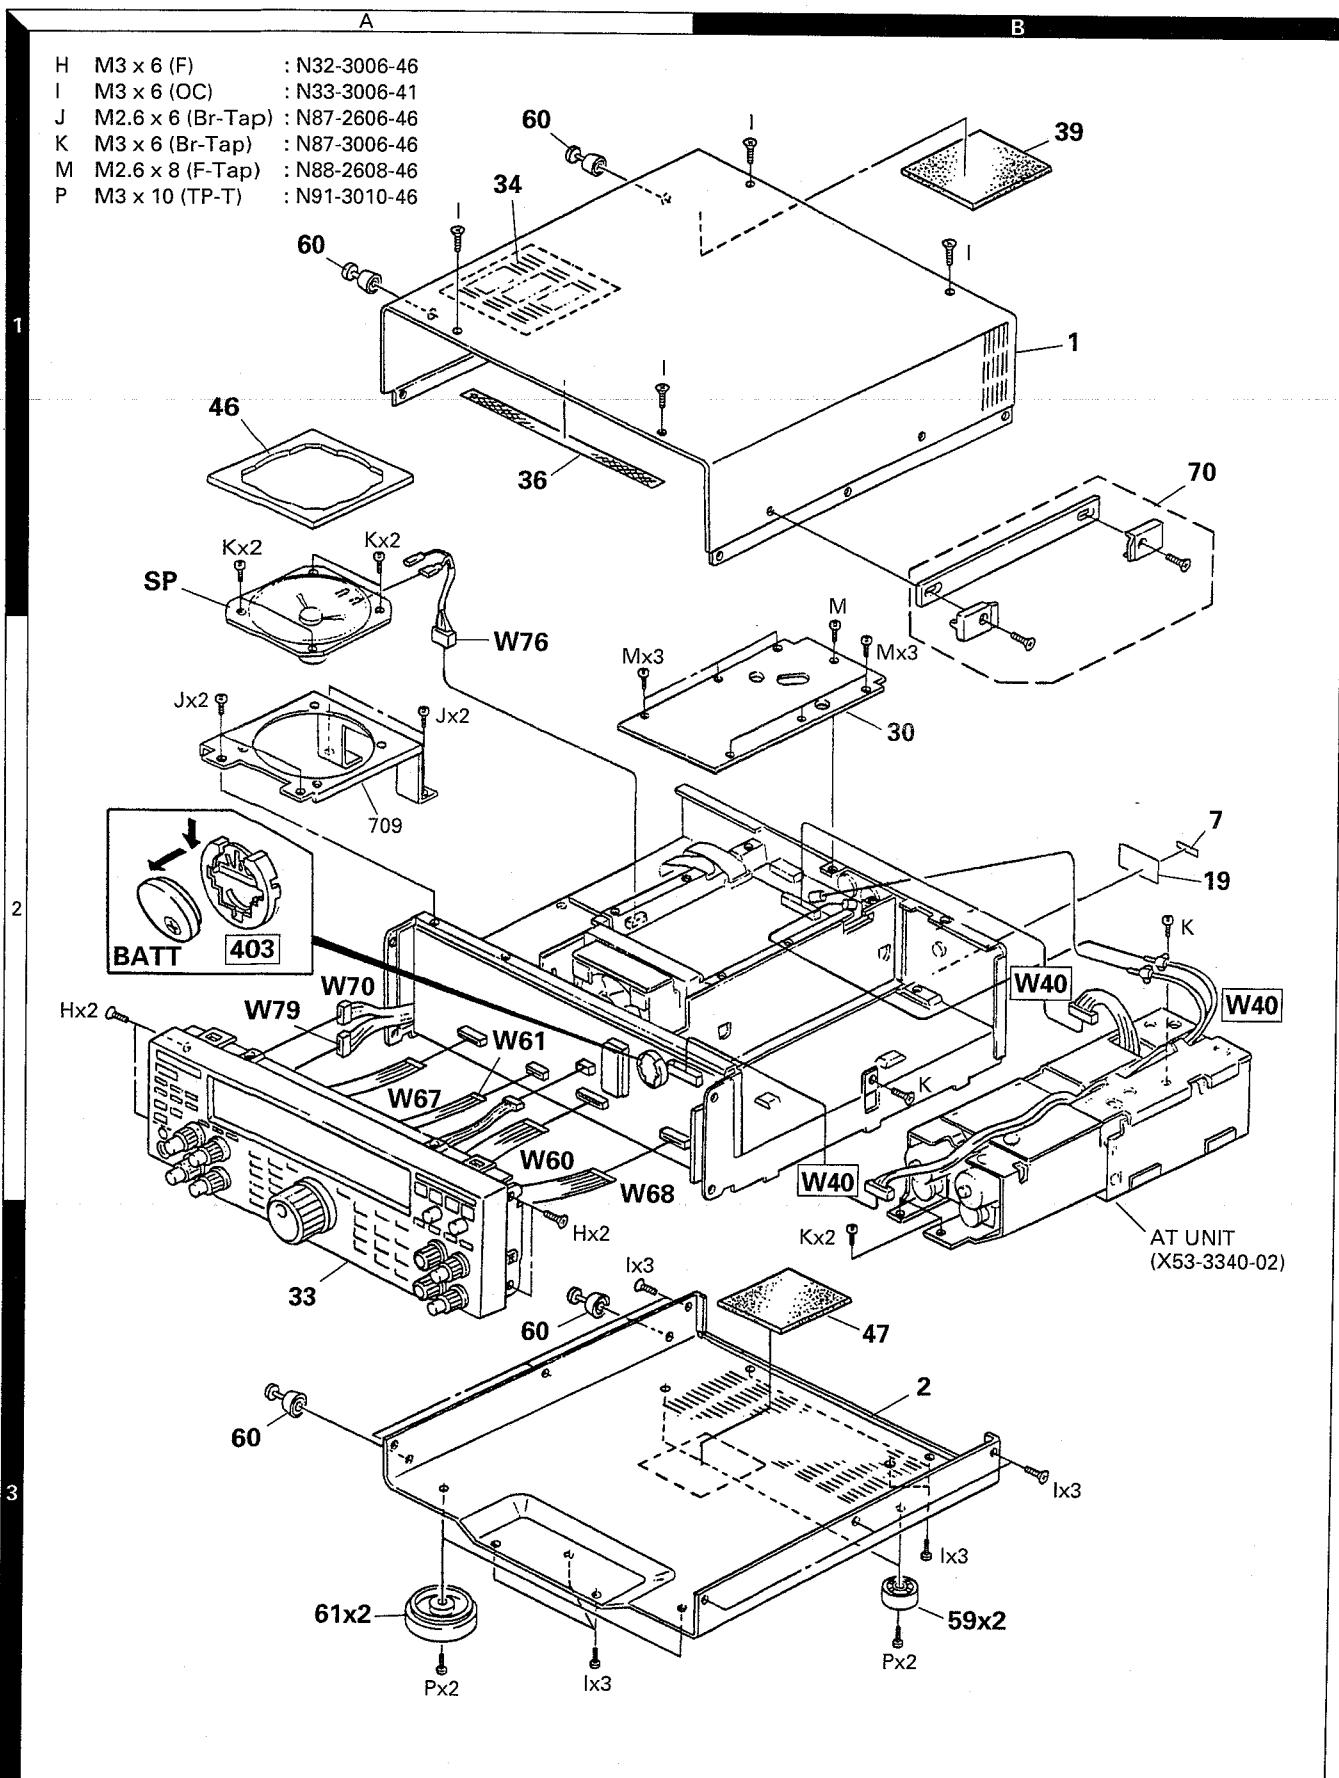

Parts with the exploded numbers larger than 700 are not supplied.


TS-870S

EXPLODED VIEW

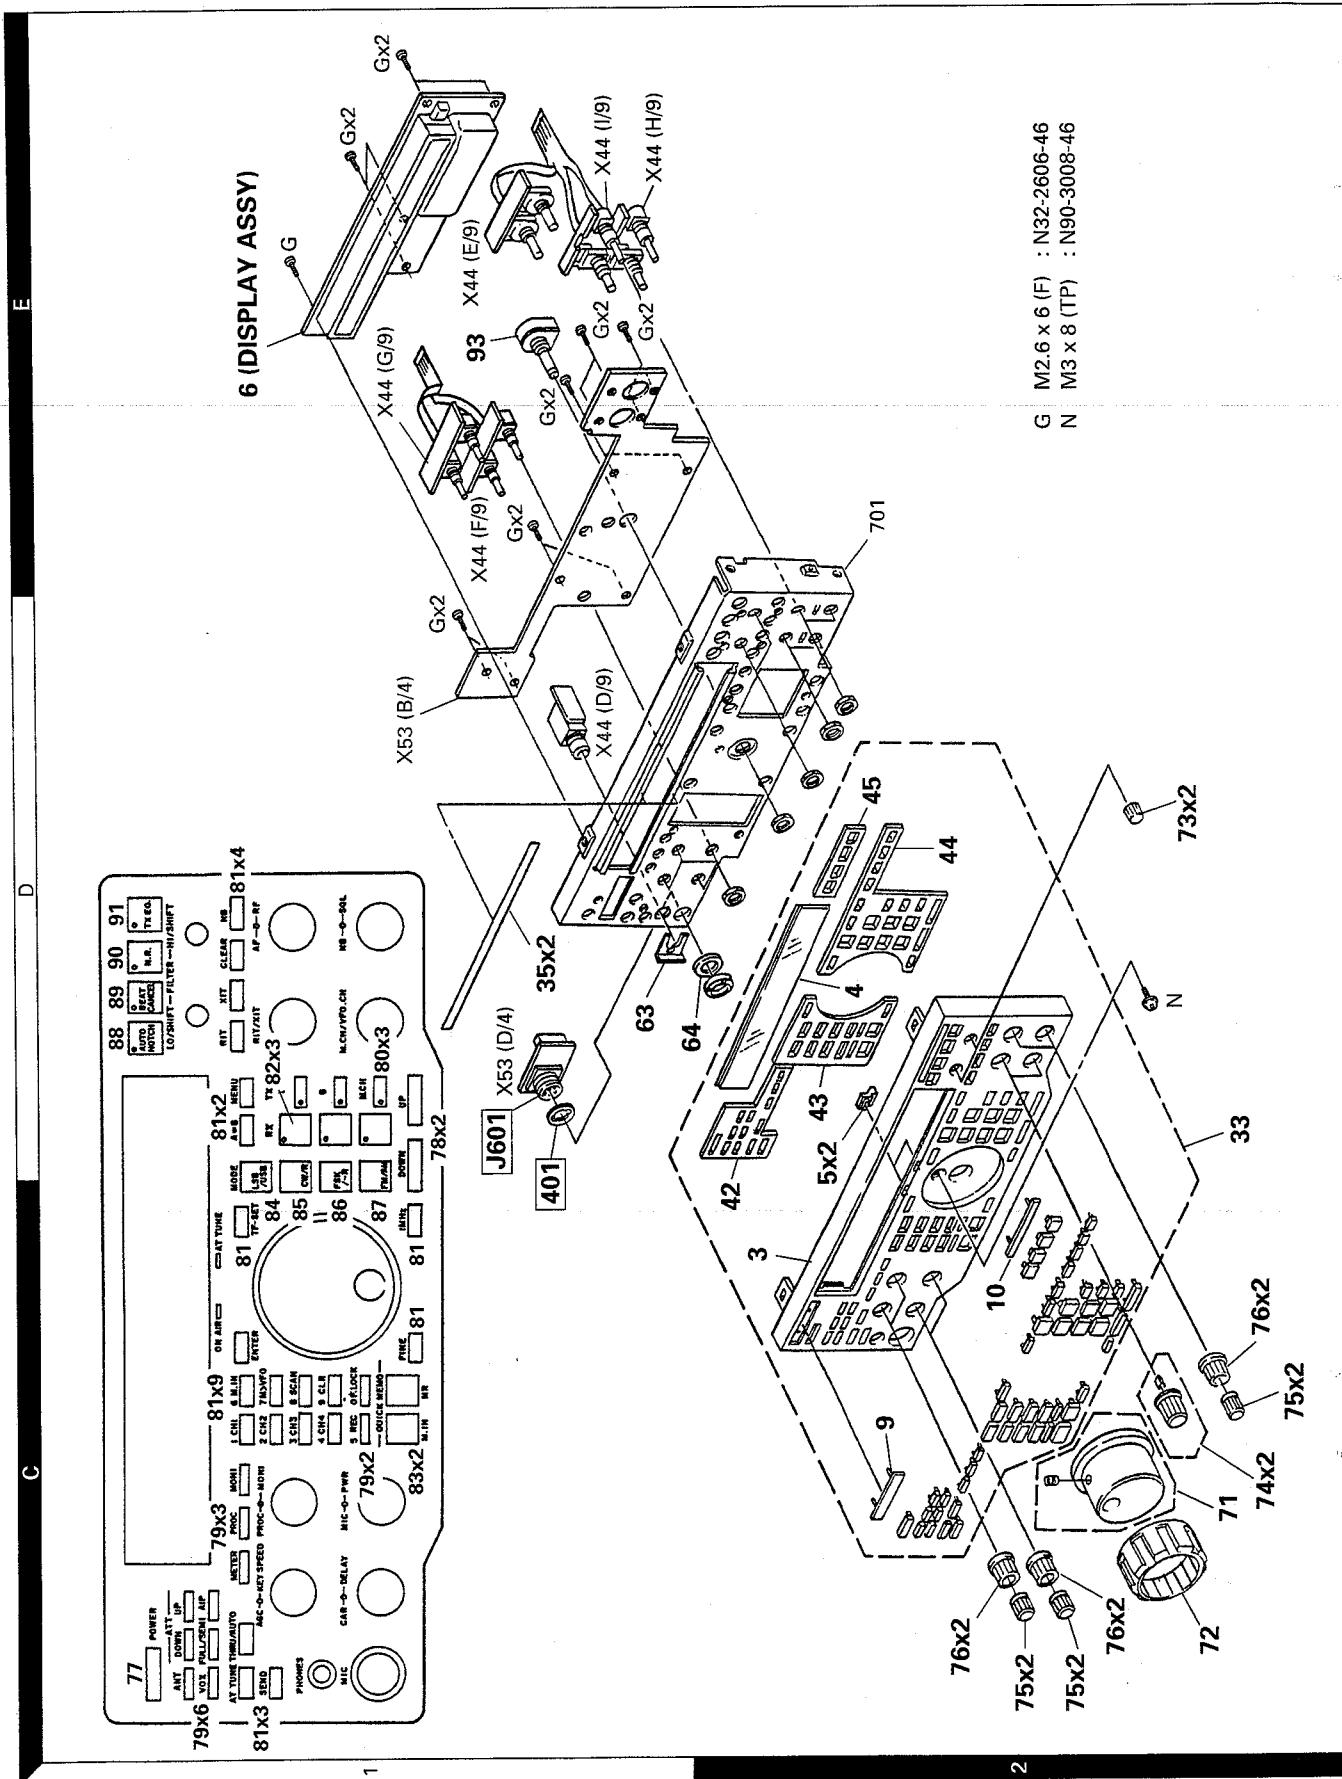


Parts with the exploded numbers larger than 700 are not supplied.

TS-870S TS-870S EXPLODED VIEW

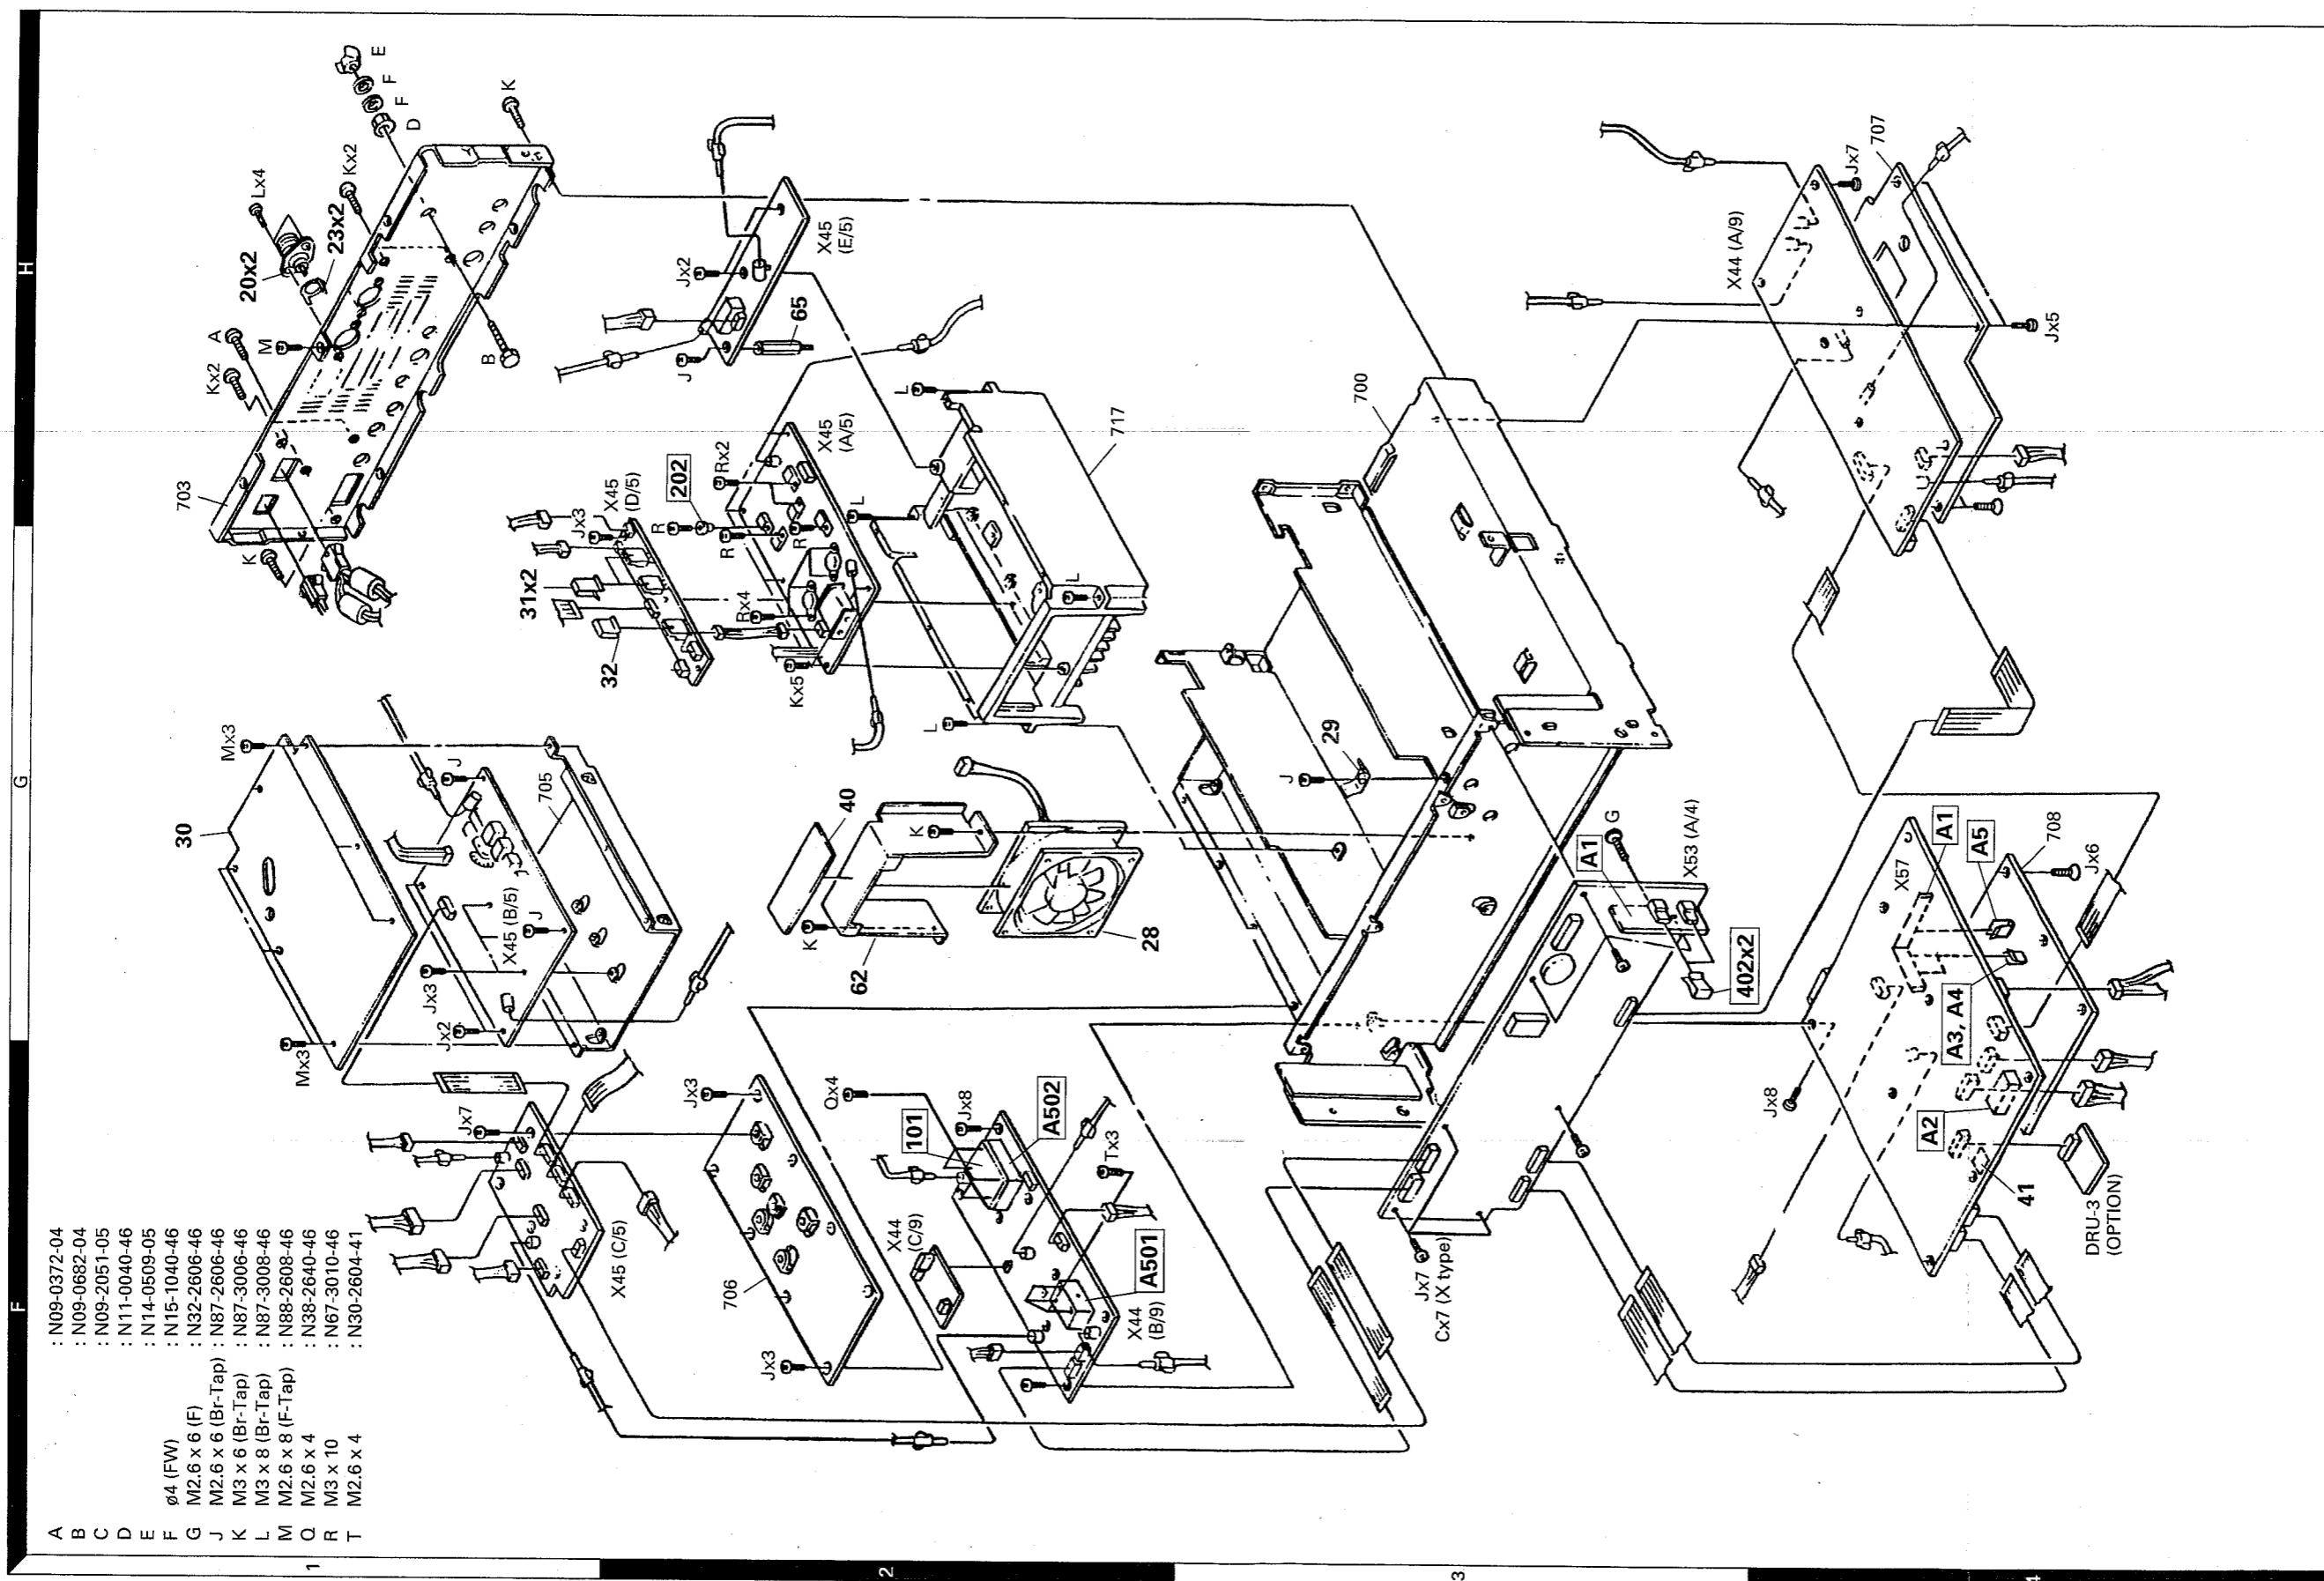


Parts with the exploded numbers larger than 700 are not supplied.

TS-870S TS-870S
EXPLODED VIEW

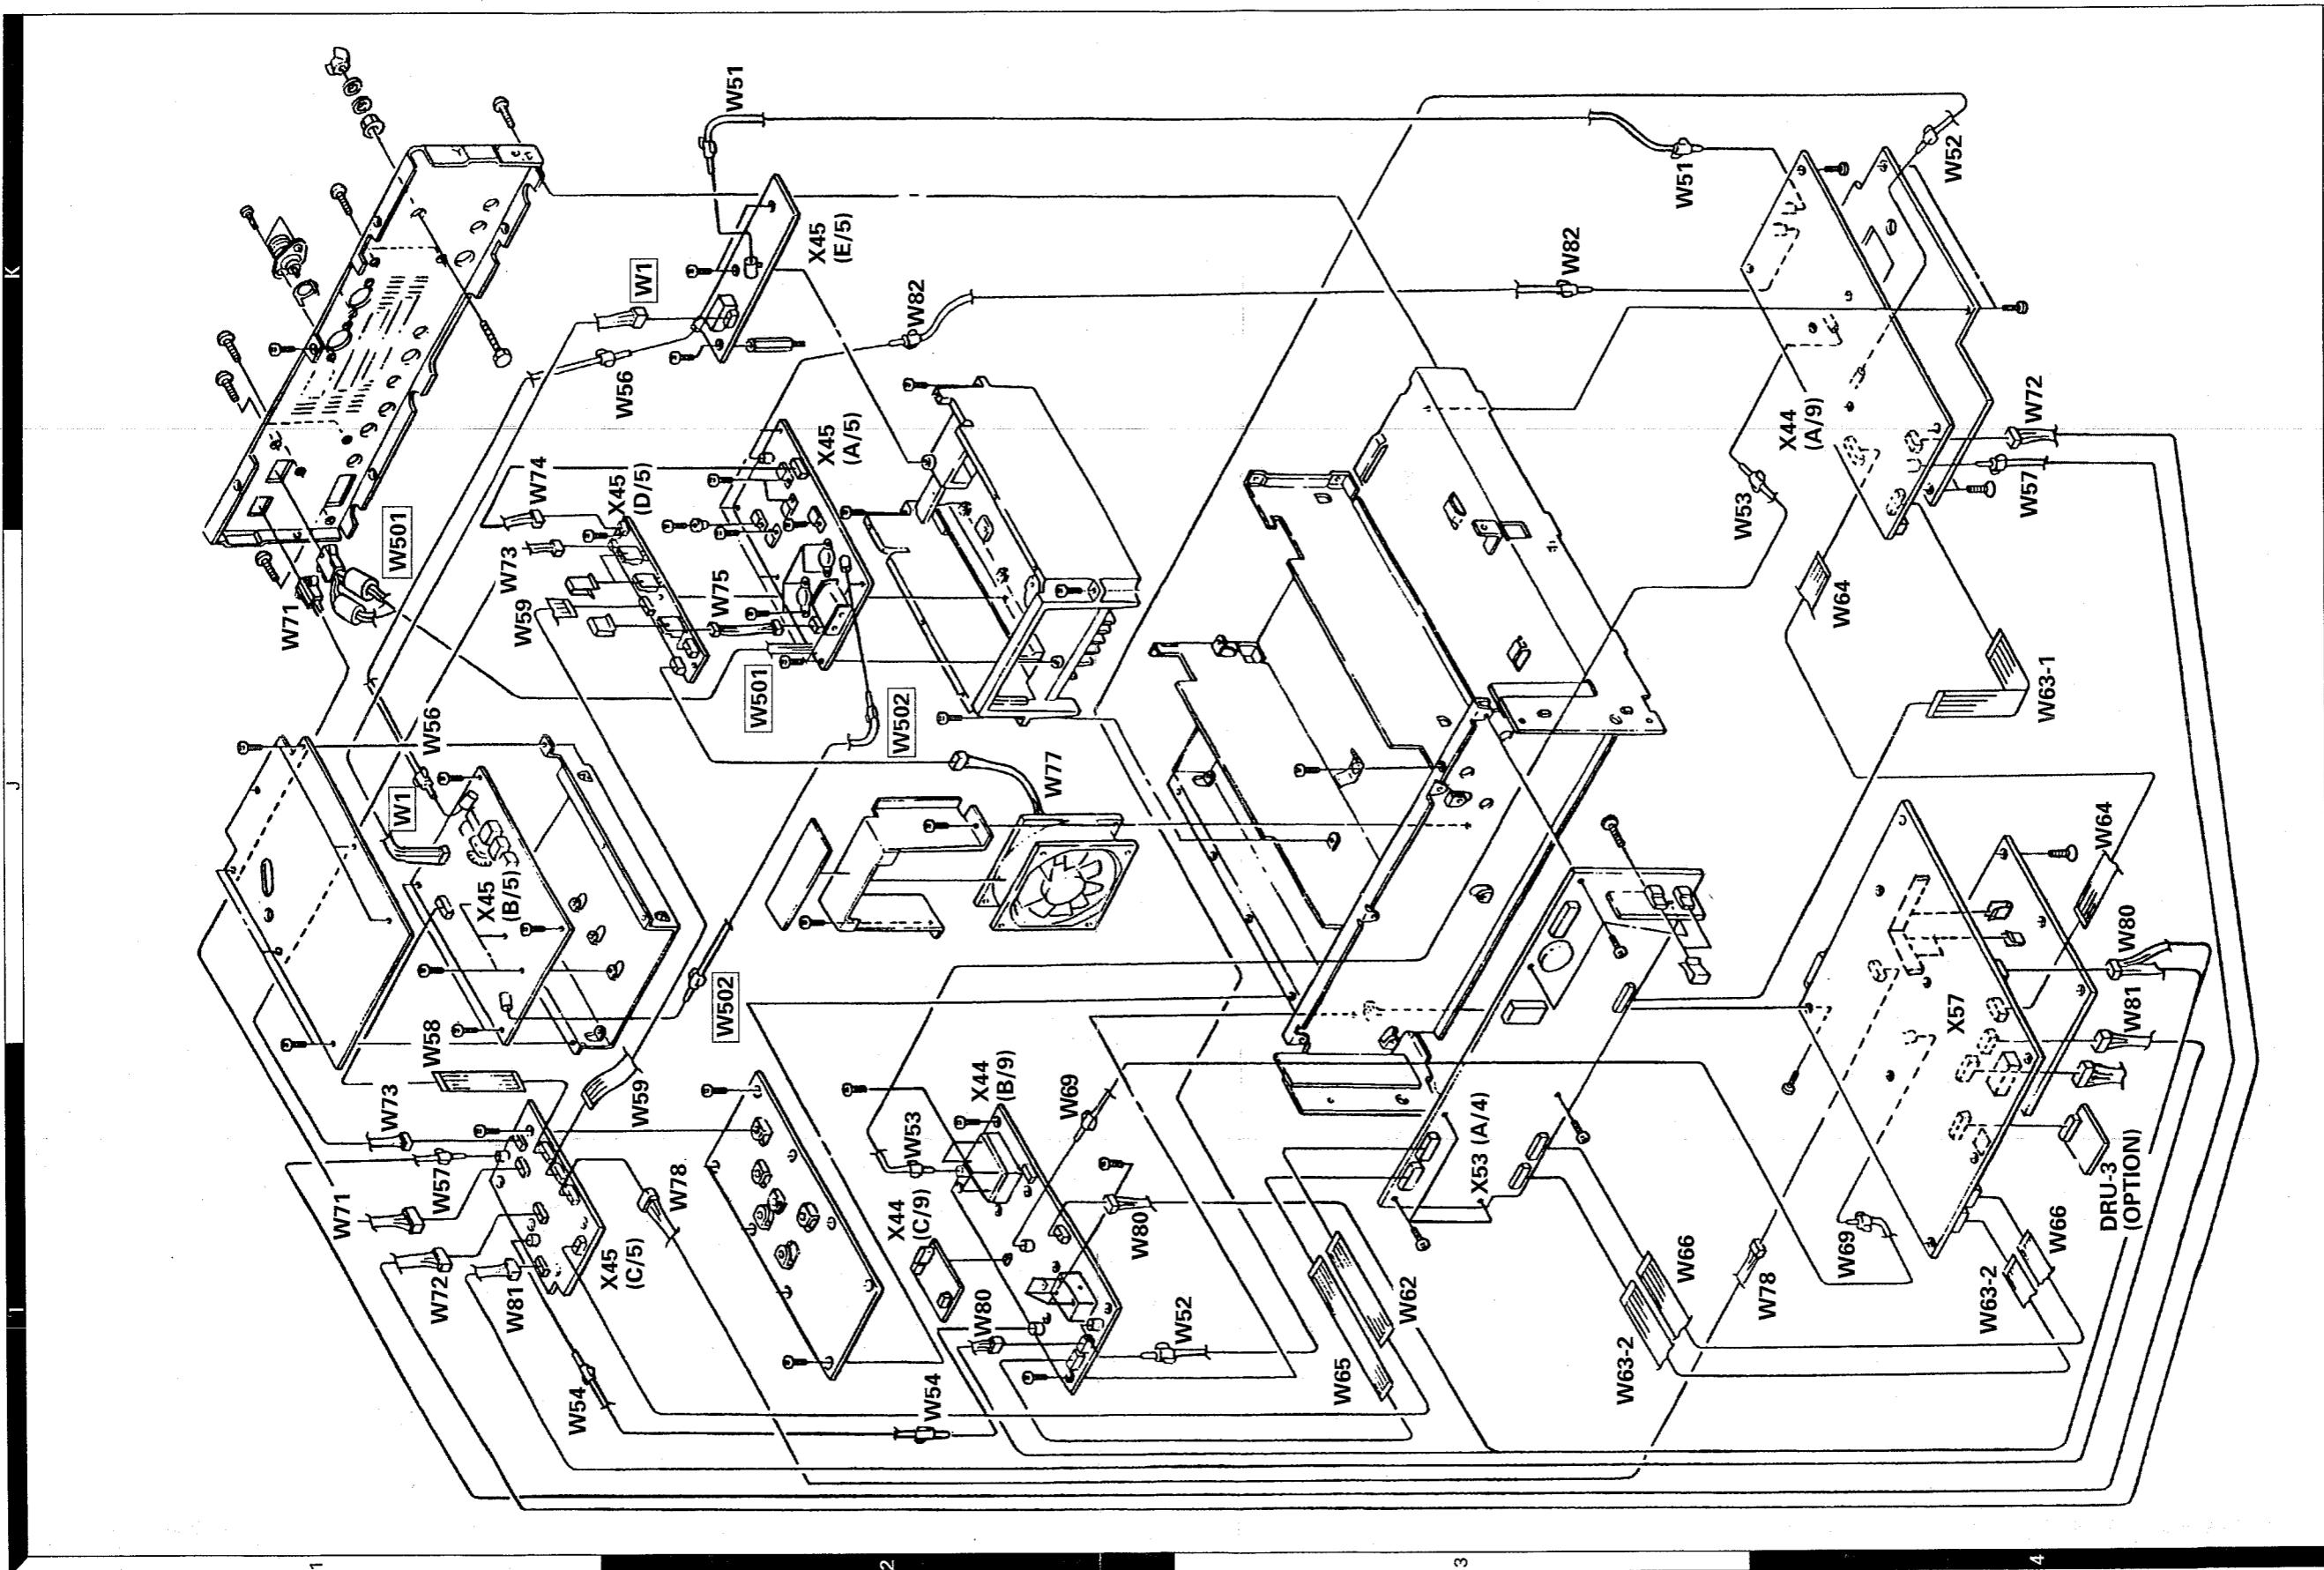


TS-870S

EXPLODED VIEW

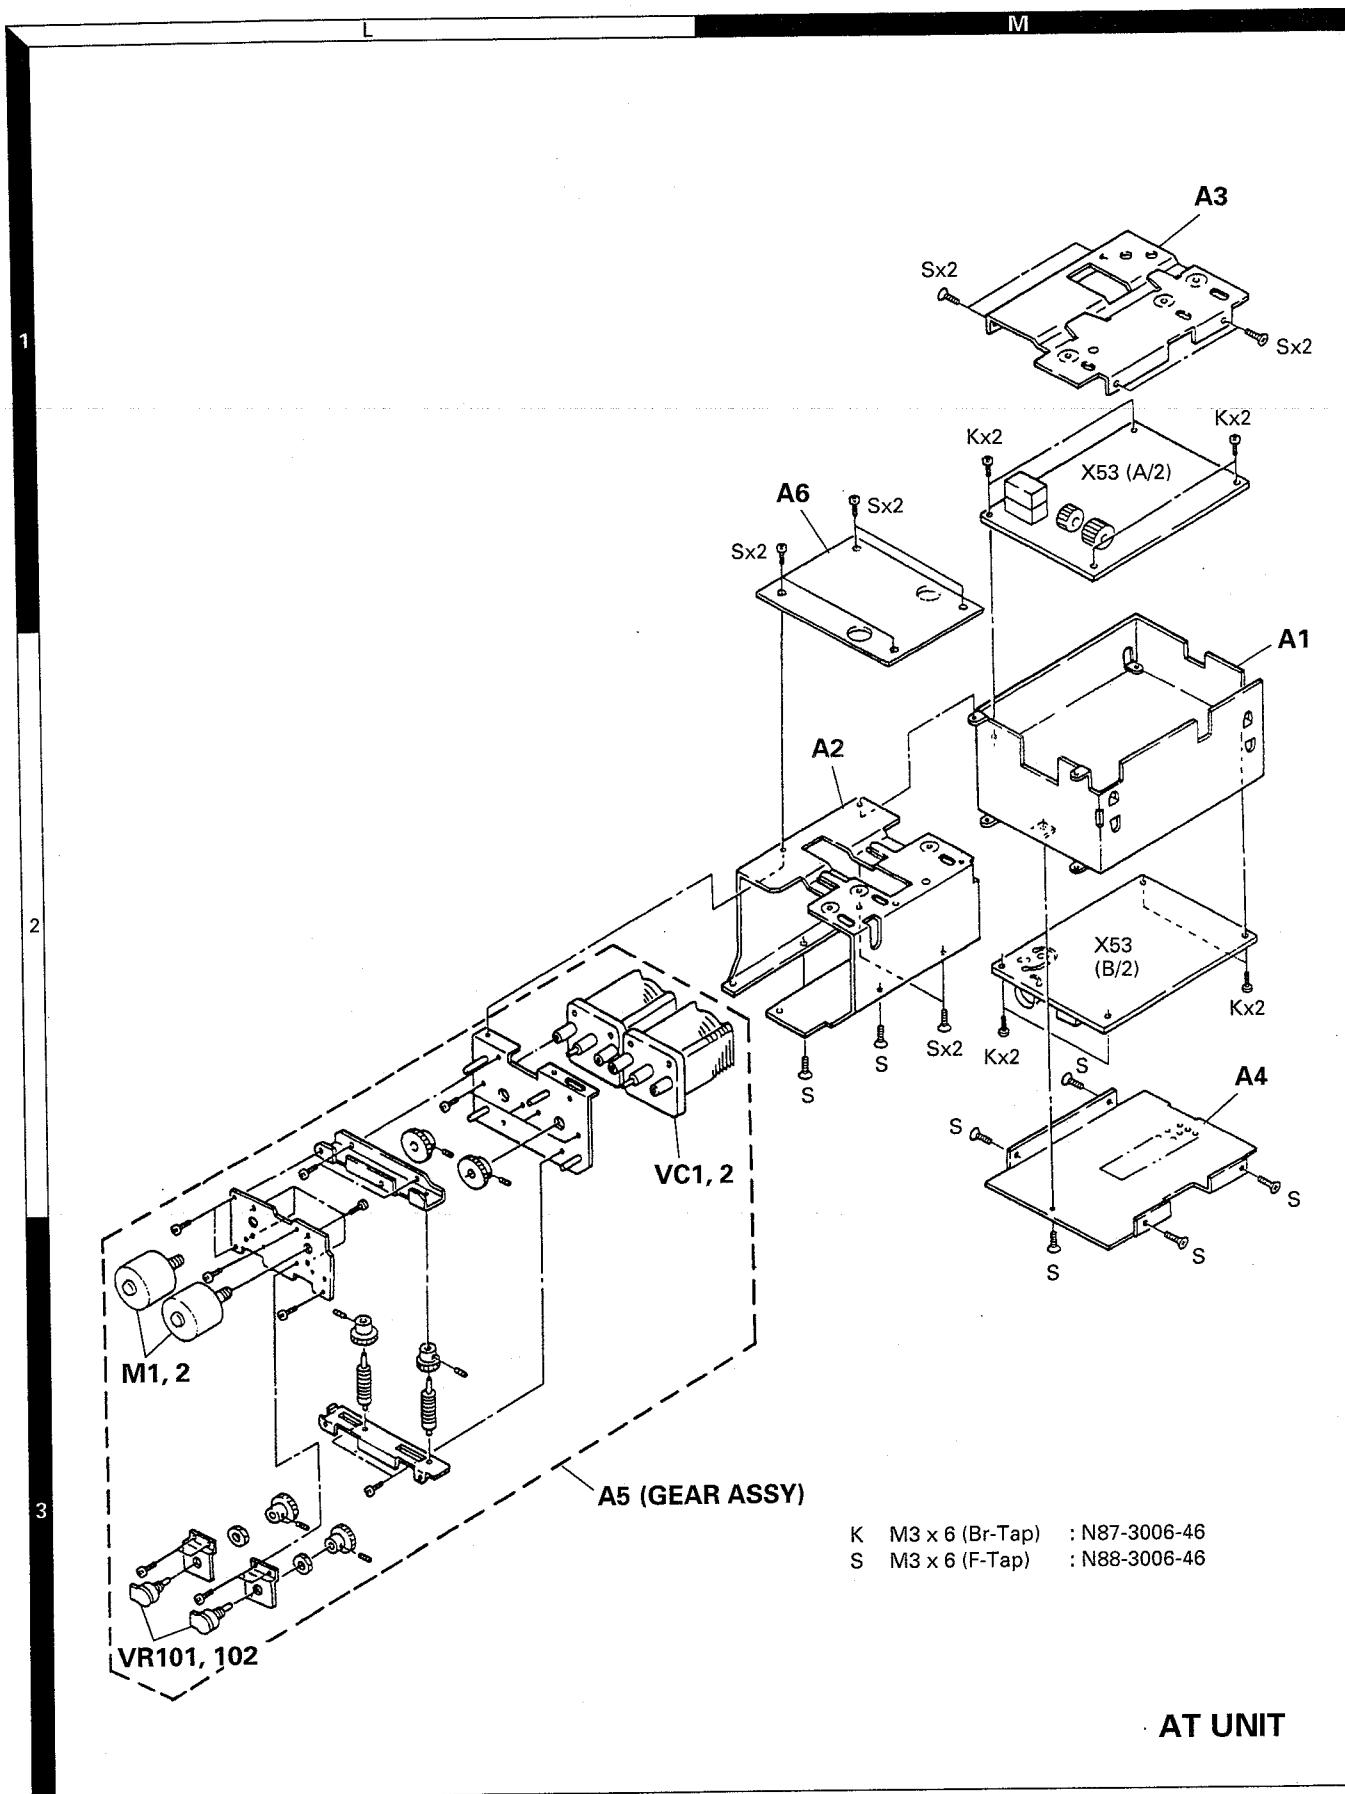

TS-870S

PACKING

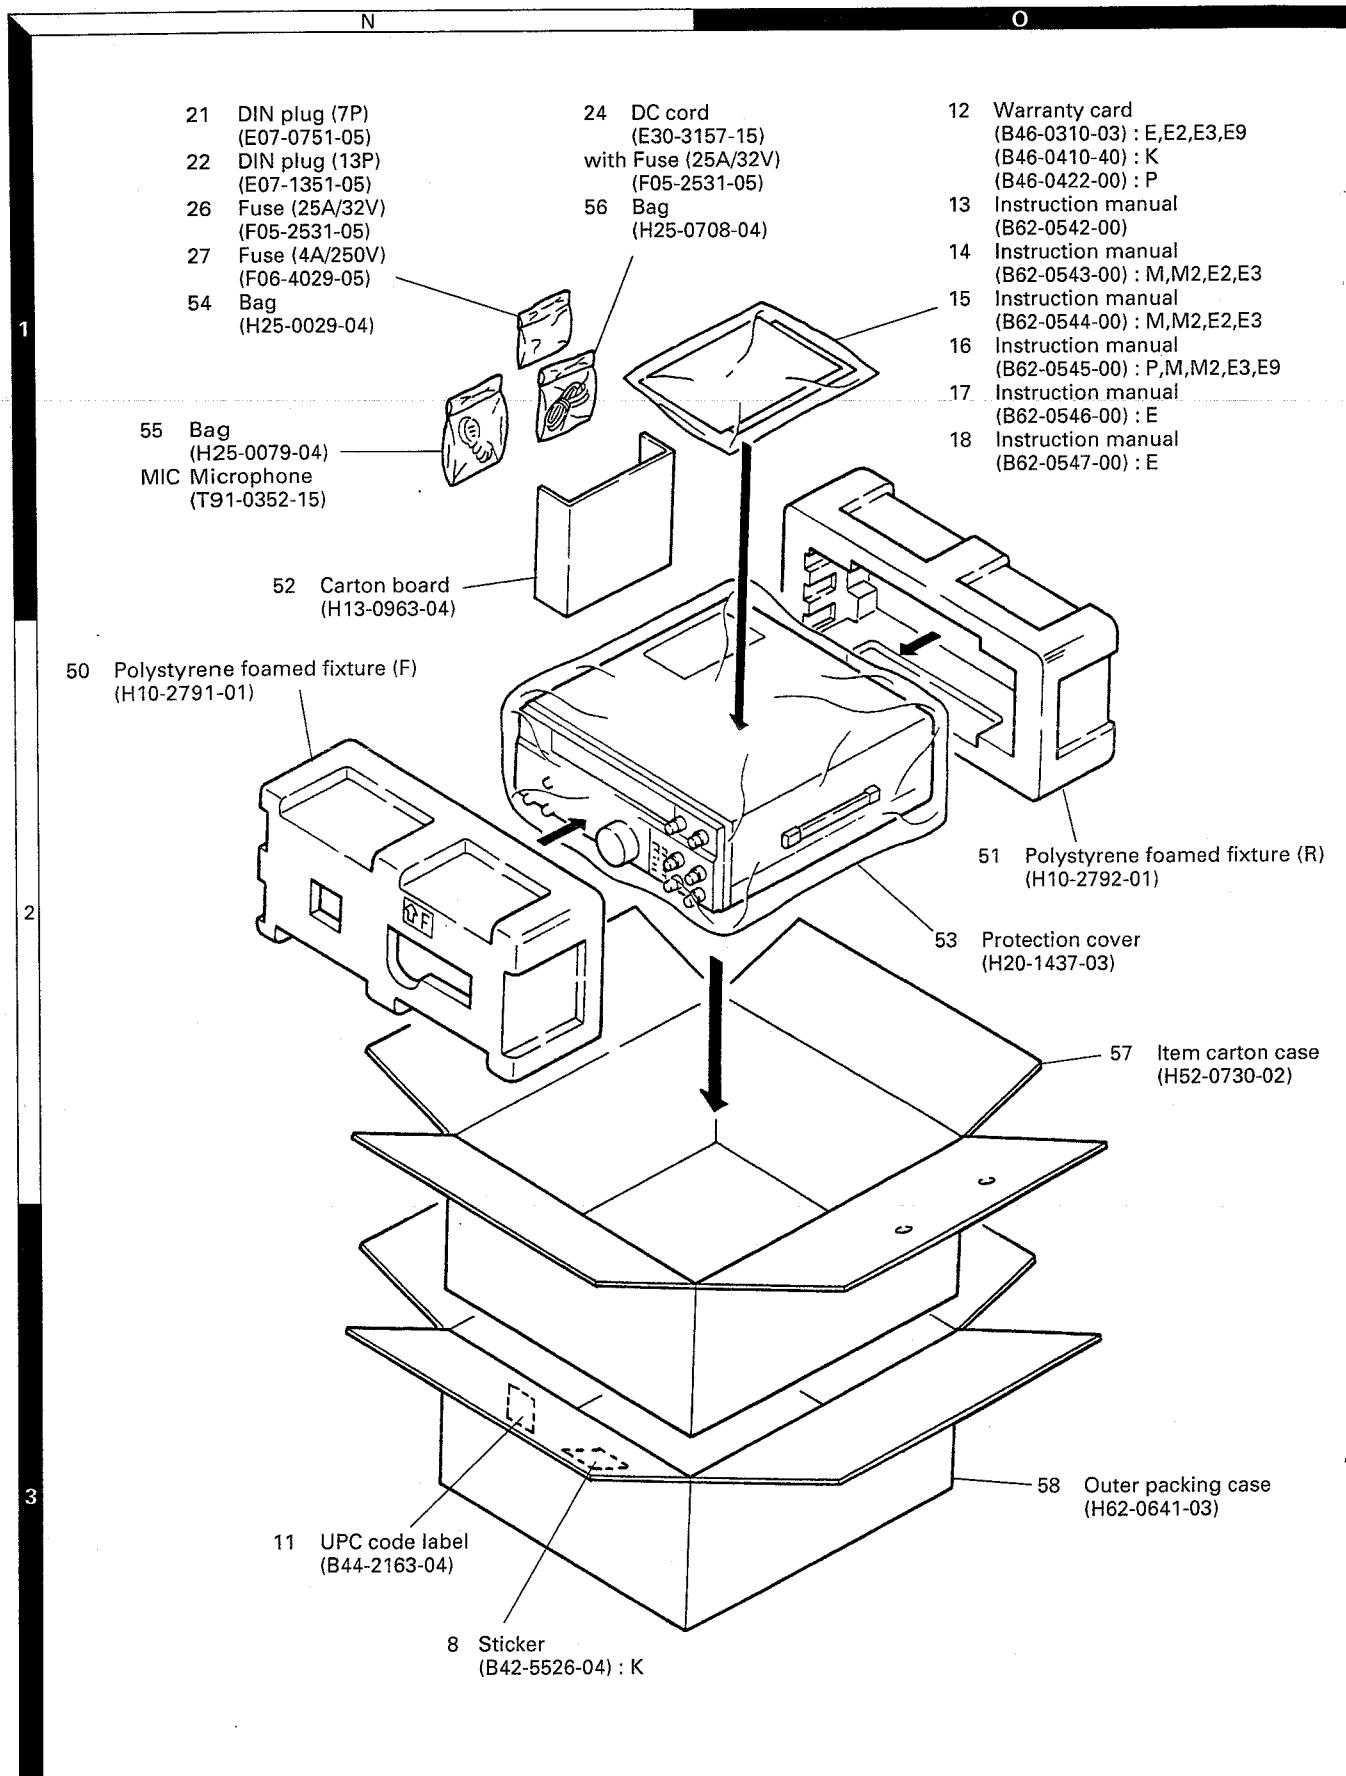

TS-870S

ADJUSTMENT

Required Test Equipment

1. DC Voltmeter (DC V.M.)

- 1) Input resistance : More than $1M\Omega$
- 2) Voltage range : 1.5 to 1000V AC/DC

Note : A high-precision multimeter may be used. However, accurate readings can not be obtained for high-impedance circuits.

2. DC Ammeter

- 1) Current range : 100mA, 1.5A, 15A, high-precision ammeter may be used.

3. RF VTVM (RF V.M.)

- 1) Input impedance : $1M\Omega$ and less than $3pF$, min.
- 2) Voltage range : 10mV to 300V
- 3) Frequency range : 10kHz to 500MHz

4. AF Voltmeter (AF V.M.)

- 1) Frequency range : 50Hz to 10kHz
- 2) Input resistance : $1M\Omega$ or greater
- 3) Voltage range : 10mV to 30V

5. AF Generator (AG)

- 1) Frequency range : 200Hz to 5kHz
- 2) Output : 1mV or less to 1V, low distortion

6. AF Dummy Load (DM. SP)

- 1) Impedance : 8Ω
- 2) Dissipation : 3W or greater

7. Oscilloscope

Requires high sensitivity, and external synchronization (150MHz or greater).

8. Sweep Generator (Sweep G.)

- 1) Center frequency : 50kHz to 90MHz
- 2) Frequency deviation : Maximum $\pm 35kHz$
- 3) Output voltage : 100mV or greater

9. Standard Signal Generator (SSG)

- 1) Frequency range : 50kHz to 50MHz
- 2) Output : $-133dBm/0.05\mu V$ to $7dBm/500mV$
- 3) Output impedance : 50Ω
- 4) AM and FM modulation can be possible

Note : Generator must be frequency stable.

10. Frequency Counter (f. counter)

- 1) Minimum input voltage : 50mV
- 2) Frequency range : 150MHz or greater

11. Noise Generator (Noise G.)

Must generate ignition noise containing harmonics beyond 30MHz.

12. RF Dummy Load

- 1) Impedance : 150Ω and 50Ω
- 2) Dissipation : 150W or greater

13. Linear Detector

- 1) Frequency range : 30MHz

14. Power Meter


- 1) Impedance : 50Ω
- 2) Dissipation : 300W continuous or greater
- 3) Frequency limits : 60MHz or greater

15. Spectrum Analyzer


- 1) Frequency range : 100kHz to 110MHz or greater
- 2) Bandwidth : 1kHz to 3MHz

16. Detector

- 1) For adjustment of BPF

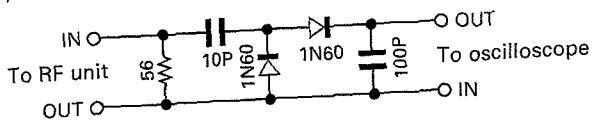

- 2) For adjustment of PLL/VCO BPF

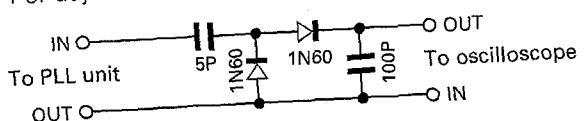

17. Directional Coupler

18. Monitor Receiver

R-1000 class

19. Microphone

MC-43S or MC-60S8

20. Tracking Generator

21. Distortion Meter

22. Double Signal Pad (50Ω)

TS-870S


ADJUSTMENT

Preparation


Unless otherwise specified, knobs and switches should be set as follows.

| | | | |
|----------------|--------|-----------------|--------|
| POWER | ON | PROCESSOR | Center |
| ATT | 0 | MIC | Center |
| AGC | Center | PWR | MAX |
| NB LEVEL | Center | CAR | Center |
| SQL | 0 | | |
| AF | 0 | | |
| RF | MAX | | |

Front Panel

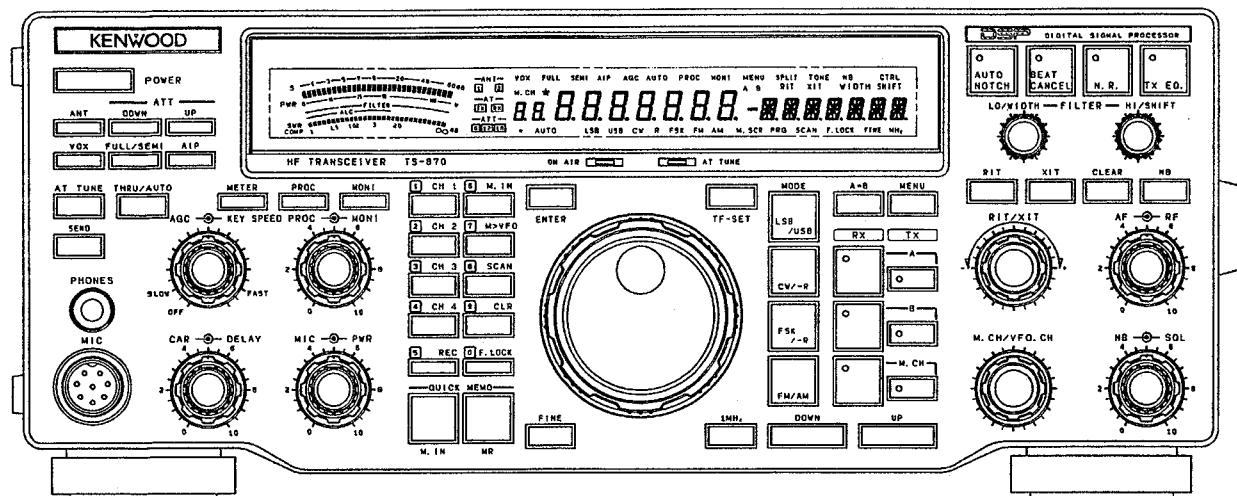


Rear Panel

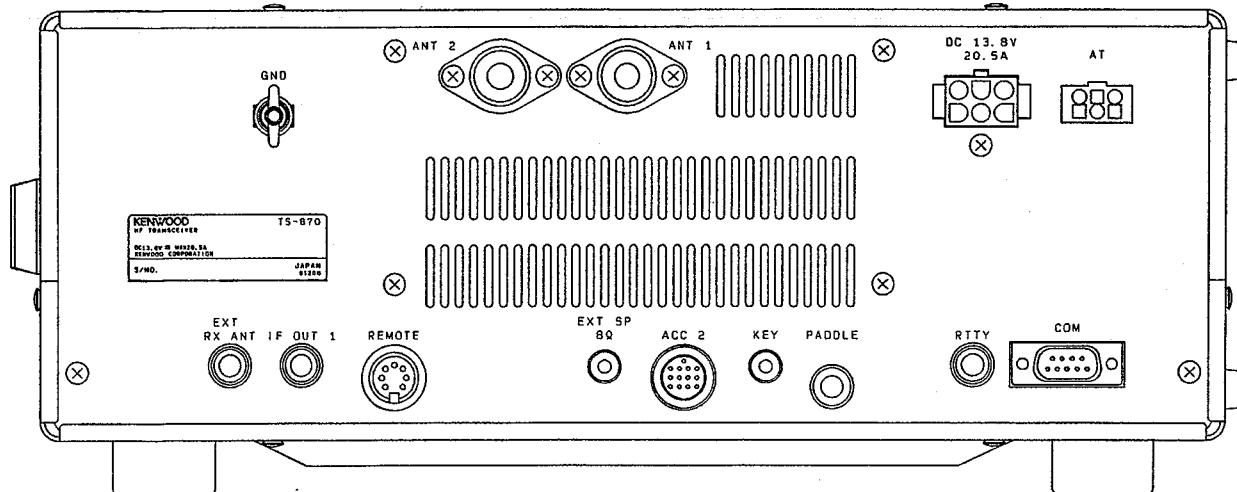



TS-870S

ADJUSTMENT

Service Jig

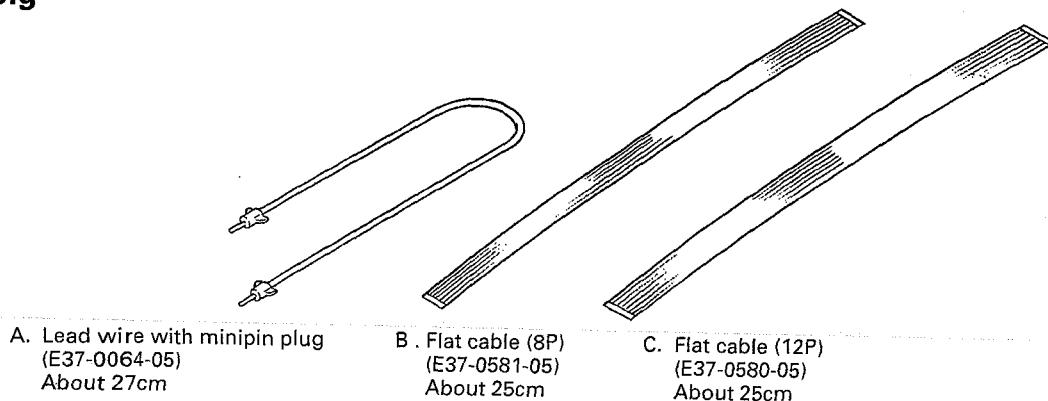

How to Use

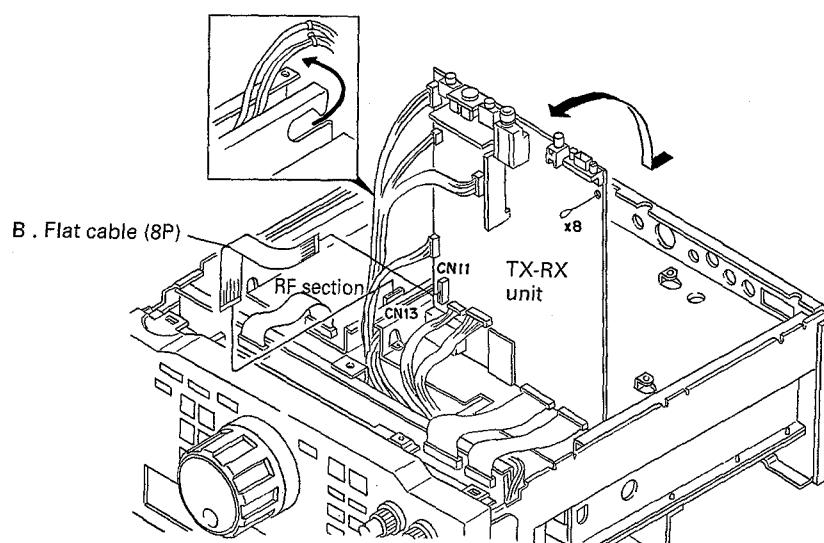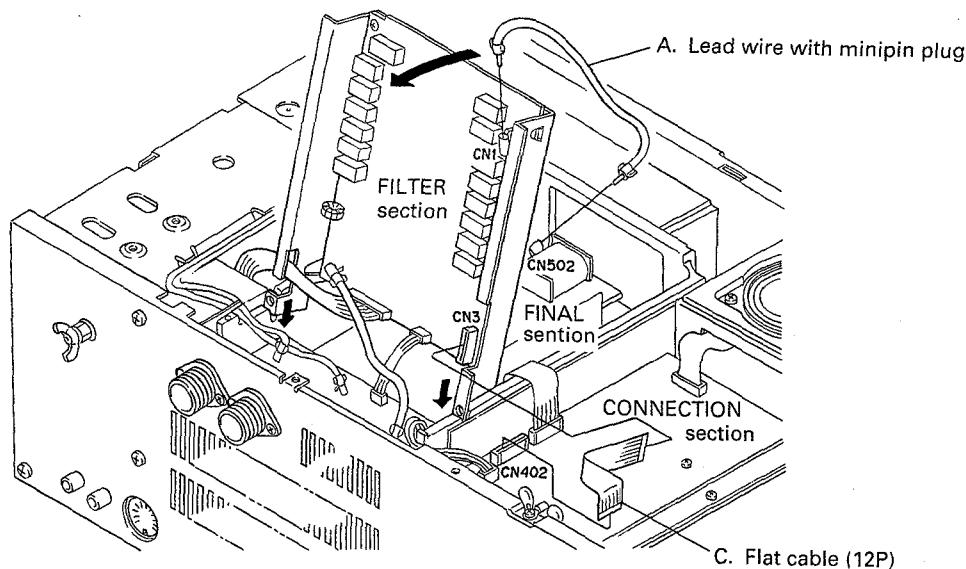

TS-870S

ADJUSTMENT

Service Adjustment Mode

■ Outline

- The TS-870S is adjusted by the normal method and by another method using the service adjustment mode.
 - In the adjustment mode, there are 28 menu numbers A0 to BB. All adjustment data items are saved in the EEPROM.
 - When the service adjustment mode is entered, data is read from the EEPROM and placed in the CPU RAM so that settings can be modified.
 - The EEPROM is updated only when data is written in Menu No. BA.
- Note :** Transmission is possible in reception-related adjustment modes.

■ Operation procedure

- Adjustment mode start
Hold down the [N.R.] key and [LSB/USB] key, and turn the [POWER] switch ON to enter the adjustment mode. The menu number will appear in M. CH on the display.
- Adjustment mode menu number selection
When the [M. CH/VFO. CH] control is turned, the menu number changes.
- Adjustment mode data writing
Press the [UP]/[DOWN] key or the microphone [UP]/[DOWN] key in MENU No. BA.
- Adjustment mode cancel
When the [CLR] key is pressed, the normal memory-channel display returns.
Note : If the power is switched OFF in the adjustment mode, it is canceled.

Service Adjustment Mode Menu

| Menu No. | Adjustment function | Description |
|----------|---------------------|--|
| A0 | System | Checksum display (Program version confirmation) |
| A1 | ALC | ALC reference voltage adjustment |
| A2 | S-meter (SSB) | Start level setting |
| A3 | | S9 level setting |
| A4 | | Full-scale level setting |
| A5 | Filter | 8.83MHz IF filter center frequency correction |
| A6 | | 455kHz IF filter center frequency correction |
| A7 | Power adjustment | 100W adjustment (With power meter curve) |
| A8 | | 50W adjustment (With power meter curve) |
| A9 | | 25W adjustment (With power meter curve) |
| AA | | 10W adjustment (With power meter curve) |
| AB | TX gain | 1.9MHz band |
| AC | | 3.5MHz band |
| AD | | 7MHz band |
| AE | | 10MHz band |
| AF | | 14MHz band |
| B0 | | 18MHz band |
| B1 | | 21MHz band |
| B2 | | 24.5MHz band |
| B3 | | 29MHz band |
| B4 | ALC meter | Start level setting |
| B5 | | Maximum zone level setting |
| B6 | | Full-scale level setting |
| B7 | SWR protection | Protection operation setting |
| B8 | SWR meter | VSWR=3 level setting |
| B9 | FM | FM deviation setting |
| BA | System | Writing into EEPROM |
| BB | Display | All LCD segments light (Not light ON AIR lamp) |

TS-870S

ADJUSTMENT

Display Check

| Item | Condition | Measurement | | | Adjustment | | | Specifications/Remarks |
|---------------------------|---|----------------|------|----------|-------------|---------|--|---|
| | | Test-equipment | Unit | Terminal | Unit | Parts | Method | |
| 1. All reset | 1) DC IN : DC 13.8V Pushing [A=B] key down, [POWER] : ON. | | | | Front panel | Display | After displaying HELLO, the display is reset as follows: DISP f. : 14.000.00 MODE : USB METER : ALC ANT : 1 AGC | Display should be normal. Should be at the reset frequency. |
| 2. All LCD segments light | 1) Menu No. : BB | | | | | | Check | All LCD segments light. |

PLL Section





| Item | Condition | Measurement | | | Adjustment | | | Specifications/Remarks |
|--|---|----------------------|------------|---------------|------------|----------------|-------------------|------------------------|
| | | Test-equipment | Unit | Terminal | Unit | Parts | Method | |
| 1. 20MHz frequency adj. | 1) [POWER] : ON MODE : FM Receive | f. counter RF V.M | PLL | CN510 (TP) | PLL | TC800 | Frequency adjust. | 20.000MHz ± 20Hz |
| 2. 20MHz peak adj. | 1) Display f. : 14.000MHz MODE : USB Receive | | | CN503 | | L528 | MAX. | |
| 3. 60MHz BPF adj. | 1) MODE : FM Receive | | | IC506 2 pin | | L529 L530 | Repeat for MAX. | |
| 4. 55MHz BPF adj. and frequency check | 1) Display f. : 14.000MHz MODE : FM Receive | | | IC508 11 pin | | L518 L519 L520 | Repeat for MAX. | |
| | 2) Display f. : 14.000MHz | | f. counter | | | | Frequency check | 55.299~55.301MHz |
| 5. Lock voltage adj. & check VCO1 | 1) Display f. : 30kHz | | DC V.M | TP501 | PLL | TC506 | 1.8V | 1.8 ± 0.03V |
| | 2) Display f. : 7.489MHz | | | | | | Voltage check | 4.5~7.0V |
| 6. Lock voltage adj. & check VCO2 | 1) Display f. : 7.500MHz | | | | PLL | TC507 | 1.8V | 1.8 ± 0.03V |
| | 2) Display f. : 14.489MHz | | | | | | Voltage check | 4.5~7.0V |
| 7. Lock voltage adj. & check VCO3 | 1) Display f. : 14.490MHz | | | | PLL | TC508 | 1.8V | 1.8 ± 0.03V |
| | 2) Display f. : 21.489MHz | | | | | | Voltage check | 4.5~7.0V |
| 8. Lock voltage adj. & check VCO4 | 1) Display f. : 21.490MHz | | | | PLL | TC509 | 1.8V | 1.8 ± 0.03V |
| | 2) Display f. : 30.000MHz | | | | | | Voltage check | 4.5~7.0V |
| 9. Lock voltage adj. LO2A (VCO2) X58-3390-03 | 1) Display f. : 30.000MHz | | TP502 | VCO2 X58-3390 | TC1 | 5.0V | | 5.0 ± 0.03V |

TS-870S

ADJUSTMENT



| Item | Condition | Measurement | | | Adjustment | | | Specifications/Remarks |
|---------------------------------------|---|--------------------------|--------------|------------|------------|--------------------|----------|------------------------|
| | | Test-equipment | Unit | Terminal | Unit | Parts | Method | |
| 10. Output level check LO1 (CN504) | 1) Display f. : 14.000MHz MODE : USB Receive Meaturement condition : 50Ω terminated | | CN504 | | | Output level check | -5~+2dBm | |
| LO2A (CN505) | | | | CN505 | | | | -1~+6dBm (64.220MHz) |
| LO3 (CN502) | | | | CN502 | | | | -6~+0dBm (8.375MHz) |
| 20MHz (CN503) | | | | CN503 | | | | -10~+0dBm (20.000MHz) |
| LO4 (CN501) | | | Oscilloscope | CN501 | | | | -10~+0dBm (10.0kHz) |
| 11. 20MHz frequency (Final check) | | 1) MODE : USB Receive | f. counter | CN510 (TP) | PLL | TC800 | Check | 20.000MHz ± 20Hz |

Receiver Section

| Item | Condition | Measurement | | | Adjustment | | | Specifications/Remarks |
|------------------------------|--|---|------------------|----------|------------|--------------------------|---|---|
| | | Test-equipment | Unit | Terminal | Unit | Parts | Method | |
| 1. DSP PLL lock voltage adj. | 1) Display f. : 14.000MHz MODE : USB | DC V.M | TX-RX | TP1 | TX-RX | L4 | 3.50V | ±0.1V |
| 2. AGC voltage adj. | | | | TP2 | | VR2 | 3.00V | |
| 3. MCF adj. | 1) Display f. : 14.000MHz MODE : USB [AGC] : OFF Spectrum analyzer setting Center f. : 73.050MHz Frequency span : 50kHz ATT : -10dBm VBW, RBW : 1kHz V.REF : 2dB/DIV | Spectrum analyzer Tracking generator | RF | CN16 | RF | L65 L67 L70 L72 | Adjust so that gain is max. and band shown at right becomes flat. |  |
| 4. BPF adj. | 1) Display f. : 7.000MHz MODE : USB [AGC] : OFF [AIP] : OFF Spectrum analyzer setting Center f. : 7.100MHz Frequency span : 2MHz | Spectrum analyser Tracking generator | Rear panel RF | ANT | RF | L28 L29 L30 L31 | Waveform is as shown in the figure at the right. |  |
| | 2) Display f. : 14.000MHz Spectrum analyzer setting Center f. : 14.000MHz Frequency span : 5MHz | | | CN15 | | L38 L39 L40 | |  |
| | 3) Display f. : 21.000MHz Spectrum analyzer setting Center f. : 21.200MHz Frequency span : 10MHz | | | | | L44 L45 L46 | |  |

TS-870S

ADJUSTMENT

| Item | Condition | Measurement | | | Adjustment | | | Specifications/Remarks |
|--|--|--|-------------------------------|----------------|-----------------------|------------------------------------|---|--|
| | | Test-equipment | Unit | Terminal | Unit | Parts | Method | |
| (28MHz BPF adj.) | 1) Display f. : 29.800MHz MODE : USB [AGC] : FAST SSG frequency : 22.101MHz SSG output : -113dBm | SSG AF V.M Oscilloscope DM. SP | Rear panel | ANT EXT. SP | RF | L50 L52 | Adjust so that the gain is MAX. | MAX. |
| 5. RX IF AMP adj. | 1) Display f. : 14.100MHz MODE : USB [AGC] : OFF [AIP] : OFF AF output : 0.63V/8Ω SSG frequency : 14.101MHz SSG output : -119dBm | SSG AF V.M Oscilloscope DM. SP | Rear panel | ANT EXT. SP | RF Connec- tion | L75 L77 L451 L452 L458 | Repeat 2~3 times for MAX AF output reading. | |
| • Item 6 to 10 below are adjusted in the adjustment mode. To terminate the adjustment menu in the middle, save your settings with Menu No. BA. | | | | | | | | |
| 6. Checksum check | 1) Menu No. : A0 | | | | Front panel | Display | Check | Display : E7b9 |
| 7. ALC voltage adj. | 1) Menu No. : A1 | DC V.M | RF | TP2 | Front panel | [RIT/XIT] knob | 2.70V | ±0.02V |
| 8. S-meter adj. | 1) Menu No. : A2 SSG frequency : 14.101MHz SSG output : -110dBm | SSG AF V.M Oscilloscope DM. SP | Rear panel | ANT EXT. SP | TX-RX VR1 | Display : 05 | ±02 | |
| S1 | 2) Menu No. : A2 SSG output : -107dBm | | | | Front panel | [UP] key | [UP] key : Push once time | Reference display : 12±06 |
| S9 | 3) Menu No. : A3 SSG output : -81dBm | | | | | | | Reference display : 45±10 |
| Full-scale | 4) Menu No. : A4 SSG output : -23dBm | | | | | | | Reference display : 80±20 |
| 9. 8.83MHz IF filter adj. | 1) Menu No. : A5 SSG1 f. : 1.79980MHz SSG1 output : -60dBm SSG2 f. : 1.80260MHz SSG2 output : -60dBm | SSG1 SSG2 Double signal pad Oscilloscope (10:1 probe) | Rear panel Connec- tion | ANT TP401 | Front panel | [RIT/XIT] knob | The waveforms must cross. | OK  NG  |
| 10. 455kHz IF filter adj. | 1) Menu No. : A6 | | | | TP402 | | | |
| • Writing data : After items 6 to 10 have been adjusted: 1) Menu No. : BA 2) [UP] key : Push once time Display "rEAdy" → "good" (If "nG" is displayed, enter data again.) 3) [CLR] key : Push once time (Adjustment mode terminated) | | | | | | | | |

TS-870S

ADJUSTMENT

| Item | Condition | Measurement | | | Adjustment | | | Specifications/Remarks |
|-----------------------|---|--|-------------|----------------|-------------|-------------------------------|--|-----------------------------------|
| | | Test-equipment | Unit | Terminal | Unit | Parts | Method | |
| 11. ATT check | 1) Display f. : 14.100MHz SSG frequency : 14.101MHz SSG output : -107dBm [AGC] : OFF [AIP] : OFF AF output : 1V/8Ω | SSG AF V.M Oscilloscope DM. SP | Rear panel | ANT EXT. SP | Front panel | ATT SW (UP/ DOWN) | AF output should be lowered 6dB at time. | AF output ± 3dB |
| | a. ATT : 0dB | | | | | | 1.0V | |
| | b. ATT [UP] key : 6dB | | | | | | 0.5V | |
| | c. ATT [UP] key : 12dB | | | | | | 0.25V | |
| | d. ATT [UP] key : 18dB | | | | | | 0.125V | |
| | e. ATT [DOWN] key : 12dB | | | | | | 0.25V | |
| | f. ATT [DOWN] key : 6dB | | | | | | 0.5V | |
| | g. ATT [DOWN] key : 0dB | | | | | | 1.0V | |
| | | | | | | | | ATT display : None |
| 12. S/N check | 1) Display f. : Indicated below AF VR : 0.63V/8Ω SSG f. : Indicated below However, USB : +1kHz LSB : -1kHz | SSG AF V.M Oscilloscope Distortion meter DM. SP | Rear panel | ANT EXT. SP | | | Note : If the frequency is 7.5MHz or less, AIP turns ON automatically. Turn AIP OFF with the AIP switch before starting measurement. | |
| | Frequency | MODE | SSG output | SSG MOD | DEV | S/N measurement | MAX sensitivity measurement | 10dB or more. 0.7V/8Ω or more. |
| | 100kHz | AM | -87dBm | 1kHz | 60% | | | |
| | 1.500MHz | AM | -77dBm | 1kHz | 60% | | | |
| | 1.8MHz | LSB | -119dBm | OFF | OFF | | | |
| | 3.5MHz | LSB | -119dBm | OFF | OFF | | | |
| | 5.5MHz | LSB | -119dBm | OFF | OFF | | | |
| | 7.1MHz | LSB | -119dBm | OFF | OFF | | | |
| | 10.1MHz | USB | -119dBm | OFF | OFF | | | |
| | 12.5MHz | USB | -119dBm | OFF | OFF | | | |
| | 14.1MHz | USB | -119dBm | OFF | OFF | [AIP] : ON | Sensitivity down 5~15dB. | 12dB SINAD or more. |
| | 18.1MHz | USB | -119dBm | OFF | OFF | | | |
| | 21.1MHz | USB | -119dBm | OFF | OFF | | | |
| | 24.8MHz | USB | -123dBm | OFF | OFF | | | |
| | 29.8MHz | USB | -123dBm | OFF | OFF | SINAD sentitivity measurement | | 12dB SINAD or more. |
| | 29.8MHz | FM | -119dBm | 1kHz | 3kHz | | | |
| | | | | | | | | |
| 13. SSB squelch check | 1) Display f. : 14.100MHz MODE : USB [AGC] : OFF SSG frequency : 14.101MHz SSG output : OFF | SSG AF V.M Oscilloscope DM. SP | Rear panel | ANT EXT. SP | Front panel | [SQL] VR | Set to the point noise disappeared. | Knob position 10 : 00~14 : 00 |
| | 2) SSG output : -101dBm | | | | | | Check | Squelch should open. |
| | 3) [SQL] VR : Fully clockwise | | | | | | | Squelch should close. |
| | 4) SSG output : -83dBm | | | | | | | Squelch should open. |
| 14. FM squelch check | 1) Display f. : 29.8MHz MODE : FM SSG output : OFF | | Front panel | [SQL] VR | | | Set o the point noise disappeared. | Knob position 8 : 00~12 : 00 |
| | 2) SSG output : -119dBm SSG MOD : 1kHz SSG DEV : 3kHz | | | | | | Check | Squelch should open. |
| | 3) [SQL] VR : Fully clockwise | | | | | | | Squelch should close. |
| | 4) SSG output : -100dBm | | | | | | | Squelch should open. |

TS-870S

ADJUSTMENT

| Item | Condition | Measurement | | | Adjustment | | | Specifications/Remarks |
|------------------------------------|---|---|------------------------------------|-----------------------|-------------------|------------|---------------------|---|
| | | Test-equipment | Unit | Terminal | Unit | Parts | Method | |
| 15. NB adj. | 1) Display f. : 14.100MHz MODE : USB SSG frequency : 14.101MHz SSG output : -90dBm | SSG AF V.M Oscilloscope DM. SP DC V.M Noise G. | Rear panel RF Rear panel | ANT TP1 ANT | RF EXT. SP | L81 L82 | Voltage minimum | |
| | 2) [NB] key : ON [NB] VR : Center | | | | | | | |
| 16. S-meter check | 1) Display f. : 14.175MHz MODE : USB [AGC] : FAST [RF] GAIN : MAX SSG frequency : 14.176MHz SSG output : -107dBm | SSG AF V.M Oscilloscope DM. SP | Rear panel | ANT EXT. SP | Front panel | Display | S-meter level : S1 | -111~-101dBm |
| | 2) SSG output : -83dBm | | | | | | S-meter level : S9 | -89~-77dBm |
| | 3) [NB] key : ON | | | | | | S-meter level check | Same as when [NB] key off. |
| 17. Auto notch check | 1) Display f. : 14.175MHz MODE : USB SSG frequency : 14.176MHz SSG output : -73dBm [AUTO NOTCH] key : Push (ON) | SSG | Rear panel | ANT | Front panel | Display | S-meter level check | S-meter off. |
| 18. Voice check (equipped on VS-2) | 1) [AF] VR : Arbitrary [MENU] key : Push (ON) [M.CH/VFO.CH] knob : Menu No. 48 [UP] key : Step 73 [MENU] key : Push (OFF) [FINE] key : Push (ON) | | | | | | Check | The displayed frequency can be heard vocally. |

Transmitter Section

| Item | Condition | Measurement | | | Adjustment | | | Specifications/Remarks |
|-------------------|--|---|---------------|----------|---------------------------|--|------------------------------|---------------------------------|
| | | Test-equipment | Unit | Terminal | Unit | Parts | Method | |
| 1. TX MCF adj. | 1) Display f. : 14.200MHz MODE : USB Transmit Spectrum analyzer setting TG output : -10dBm Center f. : 8.83MHz Span : 10kHz V.REF : 2dB/DIV | Tracking generator Spectrum analyzer | RF TP3 | CN10 | RF | L100 | MAX. | |
| 2. TX IF AMP adj. | 1) Display f. : 14.200MHz MODE : CW [CAR] VR : Center Disconnect CN4 from the RF unit and connect a 50Ω dummy load. Transmit | 50Ωdummy Oscilloscope | RF | CN4 | RF Connec- tion | L99,98 L95,94 L92,91 L89 VR3 L457 L456 L455 | Repeat 2 or 3 times for MAX. | Reference value 2.5Vp-p or more |
| | 2) After adjustment, set [CAR] VR to MAX for confirmation. | | | | | | | |

TS-870S

ADJUSTMENT

| Item | Condition | Measurement | | | Adjustment | | | Specifications/Remarks |
|--|---|-----------------------|----------------------|------------|-------------|----------------|--|--|
| | | Test-equipment | Unit | Terminal | Unit | Parts | Method | |
| 3. Final base current | 1) Display f. : 14.200MHz MODE : USB [MIC] VR : MIN [CAR] VR : MIN Final unit VR501,502 : MIN Connect ammeter + : External power supply - : Power connector Adjust to minimum current with VR501 and VR502 in the final unit. Transmit | Ammeter | | | Final | VR501 | Current drain (Minimum current) +250mA | First adjust VR501 and VR502 for minimum. Adjust VR501 for an increase of 250mA when switched to TX. Then adjust VR502 for 250mA over this reading. |
| | | | | | | VR502 | Current drain (Minimum current) + driver current (250mA) + 250mA. | |
| • Item 4 to 13 below are adjusted in the adjustment mode. To terminate the adjustment menu in the middle, save your settings with Menu No. BA. | | | | | | | | |
| 4. ALC adj. | 1) Menu No. : A7 Transmit | Power meter | Rear panel | ANT | Front panel | [RIT/XIT] knob | 100W | ±5.0W |
| 5. NULL adj. | 1) Menu No. : A7 Transmit | Power meter DC V.M | Rear panel Filter | ANT CN5 | Filter | TC1 | MIN. | Reference value 0.5V or less |
| 6. ALC frequency response adj. | 1) TX [M.CH] key : Push Display f. : 29.700MHz MODE : CW Transmit | Power meter | Front panel | ANT | Filter | VR1 | 95W | ±5.0W |
| | 2) TX [M.CH] key : Push Menu No. : A7 Transmit | | | | | | 100W power check | 100W ± 5W When unable to be set within the range, ALC and frequency response to be adjusted. |
| 7. TX power adj. The power meter on the display is also calibrated at the same time. | 1) 50W Menu No. : A8 Transmit After adjustment, [UP] key : Push | Power meter | Rear panel | ANT | Front panel | [RIT/XIT] knob | 50W | ±3.0W |
| | 2) 25W Menu No. : A9 Transmit After adjustment, [UP] key : Push | | | | | | 25W | ±2.0W |
| | 3) 10W Menu No. : AA Transmit After adjustment, [UP] key : Push | | | | | | 11W | ±2.0W |
| 8. TX gain adj. | 1) 1.9MHz band Menu No. : AB Transmit | Power meter | Rear panel | ANT | Front panel | [UP] key | Press the [UP] key after the beep sounds for two or three seconds. | |
| | 2) 3.5MHz band Menu No. : AC Transmit | | | | | | | |
| | 3) 7.0MHz band Menu No. : AD Transmit | | | | | | | |
| | 4) 10.1MHz band Menu No. : AE Transmit | | | | | | | |
| | 5) 14.1MHz band Menu No. : AF Transmit | | | | | | | |

TS-870S

ADJUSTMENT

| Item | Condition | Measurement | | | Adjustment | | | Specifications/Remarks |
|--|---|--|--|---------------------------------|---------------|--------------|---------|------------------------|
| | | Test-equipment | Unit | Terminal | Unit | Parts | Method | |
| 6) 18.0MHz band Menu No. : B0 Transmit | Power meter Rear panel ANT Front panel [UP] key | Press the [UP] key after the beep sounds for two or three seconds. | | | | | | |
| 7) 21.0MHz band Menu No. : B1 Transmit | | | | | | | | |
| 8) 24.9MHz band Menu No. : B2 Transmit | | | | | | | | |
| 9) 29.7MHz band Menu No. : B3 Transmit | | | | | | | | |
| 9. ALC meter adj. | 1) 1 dot Menu No. : B4 Transmit | Power meter Rear panel ANT Front panel [UP] key | [UP] key : Push | | | | | |
| | 2) Zone MAX Menu No. : B5 Transmit | | | | | | | |
| | 3) Full Menu No. : B6 Transmit | | | | | | | |
| 10. SWR protection adj. | 1) Nenu No. : B7 Transmit After adjustment, [UP] key : Push | Through type power meter 150Ω dummy | Rear panel ANT Front panel [RIT/XIT] knob | 40W | | | ±3.0W | |
| 11. SWR meter adj. | 1) Menu No. : B8 Transmit | | | | | | | |
| 12. FM DEV adj. | 1) Menu No. : B9 AG output : 1kHz/30mV Transmit | Power meter Linear detector AG | Rear panel Front panel ANT MIC | 4.6kHz | | | ±0.1kHz | |
| 13. FM MIC sense check | 1) Menu No. : B9 AG output : 1kHz/3mV E,X AG output : 1kHz/5mV K,P,M | | | | | | | |
| • Writing data : After items 4 to 13 have been adjusted: 1) Menu No. : BA 2) [UP] key : Push once time Display "rEAdy" → "good" (If "nG" is displayed, enter data again.) 3) [CLR] key : Push once time (Adjustment mode terminated) | | | | | | | | |
| 14. Spurious adj. | 1) Display f. : 24.900MHz MODE : CW Transmit | Power meter Spectrum analyzer | Rear panel ANT RF VR2 | ±1.65MHz spurious level MIN. | –60dB or less | | | |
| 15. Monitor level check | 1) Display f. : 21.100MHz MODE : USB [MONI] key : ON [MONI] VR : Center [MIC] VR : Center [AF] VR : MIN AG output : 1kHz/10mV Transmit | Power meter AF V.M Oscilloscope DM. SP AG AF V.M | Rear panel ANT EXT. SP Front panel MIC | Front panel Display | Check | 0.2V ± 0.05V | | |

TS-870S

ADJUSTMENT

| Item | Condition | Measurement | | | Adjustment | | | Specifications/Remarks |
|---------------------------------------|---|--|---------------------------|----------------|-------------|---------|---|--|
| | | Test-equipment | Unit | Terminal | Unit | Parts | Method | |
| 16. Processor check | 1) Display f. : 14.200MHz MODE : USB [MIC] VR : Center [PROC] key : ON [METER] : COMP AG output : 1kHz/10mV | Power meter AG AF V.M | Rear panel Front panel | ANT MIC | Front panel | Display | Check | COMP meter : 15~25dB |
| | 2) AG output : 1kHz/1mV | | | | | | | COMP meter : 1dot light |
| 17. Sidetone check | 1) Display f. : 14.200MHz MODE : CW [MONI] VR : Center Key down | AF V.M Oscilloscope DM. SP Electronic keyer jig | Rear panel | EXT. SP KEY | | | Check | 0.63V ± 0.3V |
| 18. CW break-in check | 1) Display f. : 14.200MHz MODE : CW [VOX] key : ON [FULL/SEMI] key : FULL | Power meter Oscilloscope Electronic keyer jig | Rear panel | ANT KEY | | | Electronic keyer jig : Key down | Full break-in operation (When the key is turned OFF, the receive mode returns immediately.) |
| | 2) [FULL/SEMI] key : SEMI [DELAY] knob : Center | | | | | | | Semi break-in operation (When the key is turned OFF, the receive mode returns after a while.) |
| 19. DRU check (equipped on DRU-3) | 1) Connect a microphone to the MIC jack. MODE : USB/LSB [MIC] VR : Center [REC] key : Push | | | | | | Hold down the [CH1], and talk into the microphone. | Can be recorded for about 15 seconds. |
| | | | | | | | Release and press the [CH1] key again. | The recorded voice must be played back. |
| 20. Sub tone check | 1) Display f. : 29.100MHz MODE : FM MIC jack : 600Ω terminated [A=B], [TX-B] key : Push [M.IN] key : Push two times [RX-M.CH] : Push Transmit | Power meter Linear detector Oscilloscope f. counter Microphone | Rear panel Front panel | ANT MIC | | | Check | DEV : ±0.5~1.0kHz Tone f. : 88.2~88.7Hz |
| 21. TX frequency check | 1) Display f. : 29.100MHz MODE : CW Transmit | | | | | | | 29.100.000MHz ± 145Hz |
| 22. TX frequency characteristic check | 1) Display f. : 14.200MHz MODE : USB/LSB MIC jack : Connect to AG AG output : 1kHz/5mV 400Hz/5mV 2.6kHz/5mV Transmit | Power meter Oscilloscope AG AF V.M | Rear panel Front panel | ANT MIC | | | a. Set AG to 1.0kHz and turn the [MIC] VR to set to 100W. b. Change the AG frequency and measure the difference between the power levels at 1.0kHz and at another frequency c. Take a measurement for each USB and LSB. | Within 6dB |


TS-870S

ADJUSTMENT

| Item | Condition | Measurement | | | Adjustment | | | Specifications/Remarks |
|---------------------|---|--|------------|----------|--|---------|--|--|
| | | Test-equipment | Unit | Terminal | Unit | Parts | Method | |
| 23. Processor check | 1) Display f. : 14.200MHz MODE : USB [PROC] key : ON [METER] key : Push [PROC] VR : MIN MIC jack : Connect to AG AG output : 1.0kHz/1mV Transmit | | | | | | Change [PROC] VR so that the first segment on the COMP meter lights. | |
| | 2) AG output : 1.0kHz / 10mV (20dB UP) Transmit | | | | | | Check | COMP meter : within 15~25dB |
| 24. AT | 1) Display f. : Indicated below MODE : CW [METER] : SWR [THRU/AUTO] : AUTO Transmit After checked return to receive mode. | Through type power meter 150Ω dummy | Rear panel | ANT | Front panel | Display | Check | ON AIR LED light. AT TUNE LED light. When tuning completed, LEDs off. |
| | 2) [AT TUNE] key : ON | | | | Frequency 1.910MHz 3.500 3.700 7.000 10.100 14.000 18.100 21.000 24.900 29.700 | AT | TC1 | Note : When 29.700MHz and SWR 1.0 to 1.3, variable capacitor has flutters so that it does not stop, adjust the TC1 at which SWR 1.2 or less is acceptable. Begins AT tuning after entering the transmission state. This should stop within roughly 6 seconds. SWR : 1.2 or less Power : 70W or more |

Adjustment Points


■ Side view

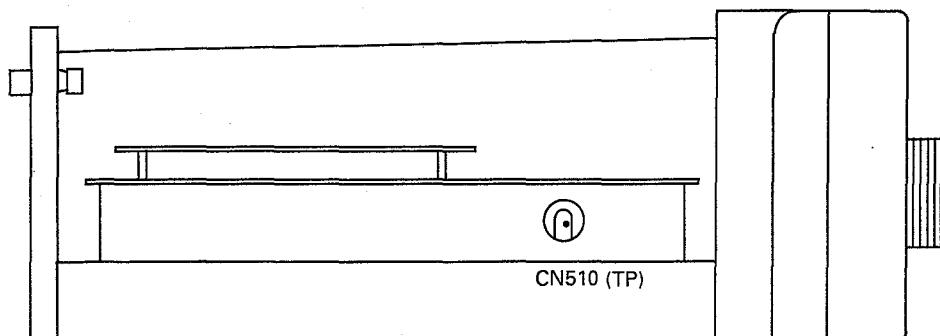

TS-870S

ADJUSTMENT


■ Upper view

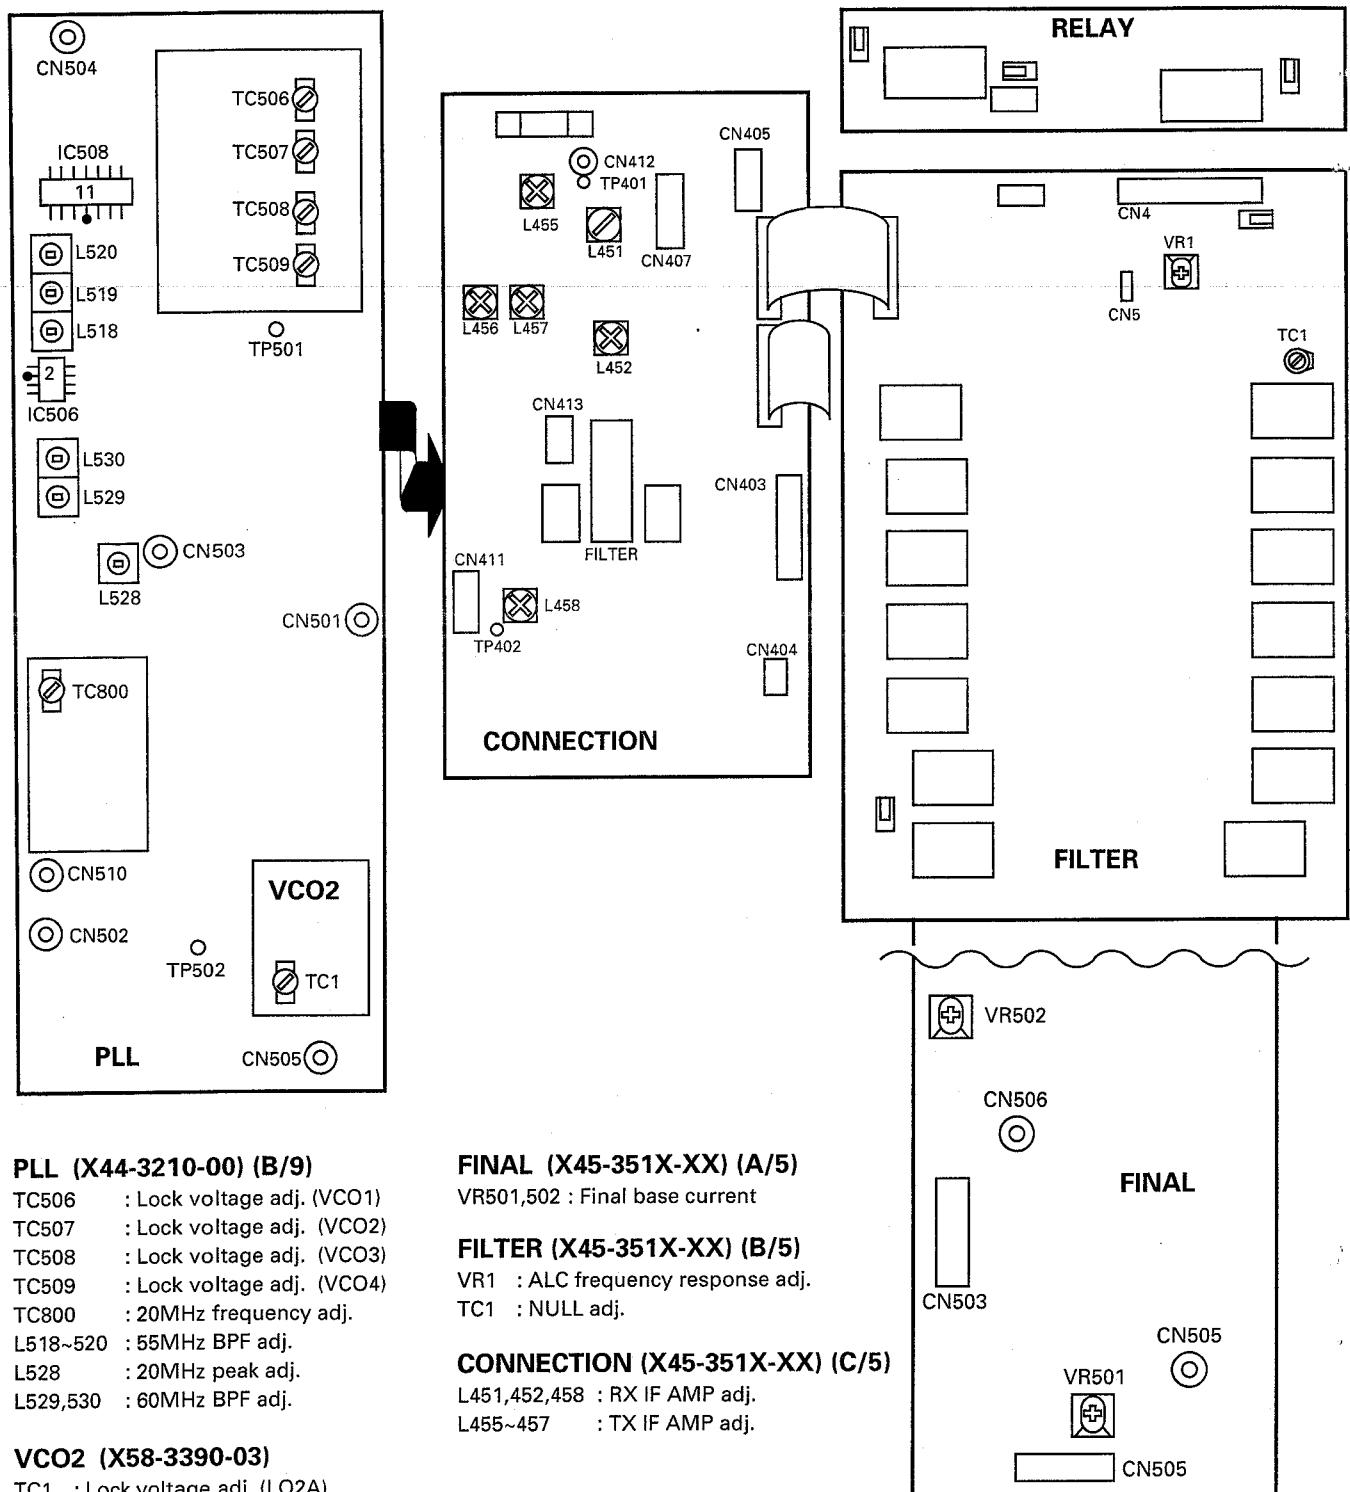

TS-870S

ADJUSTMENT

■ Lower view

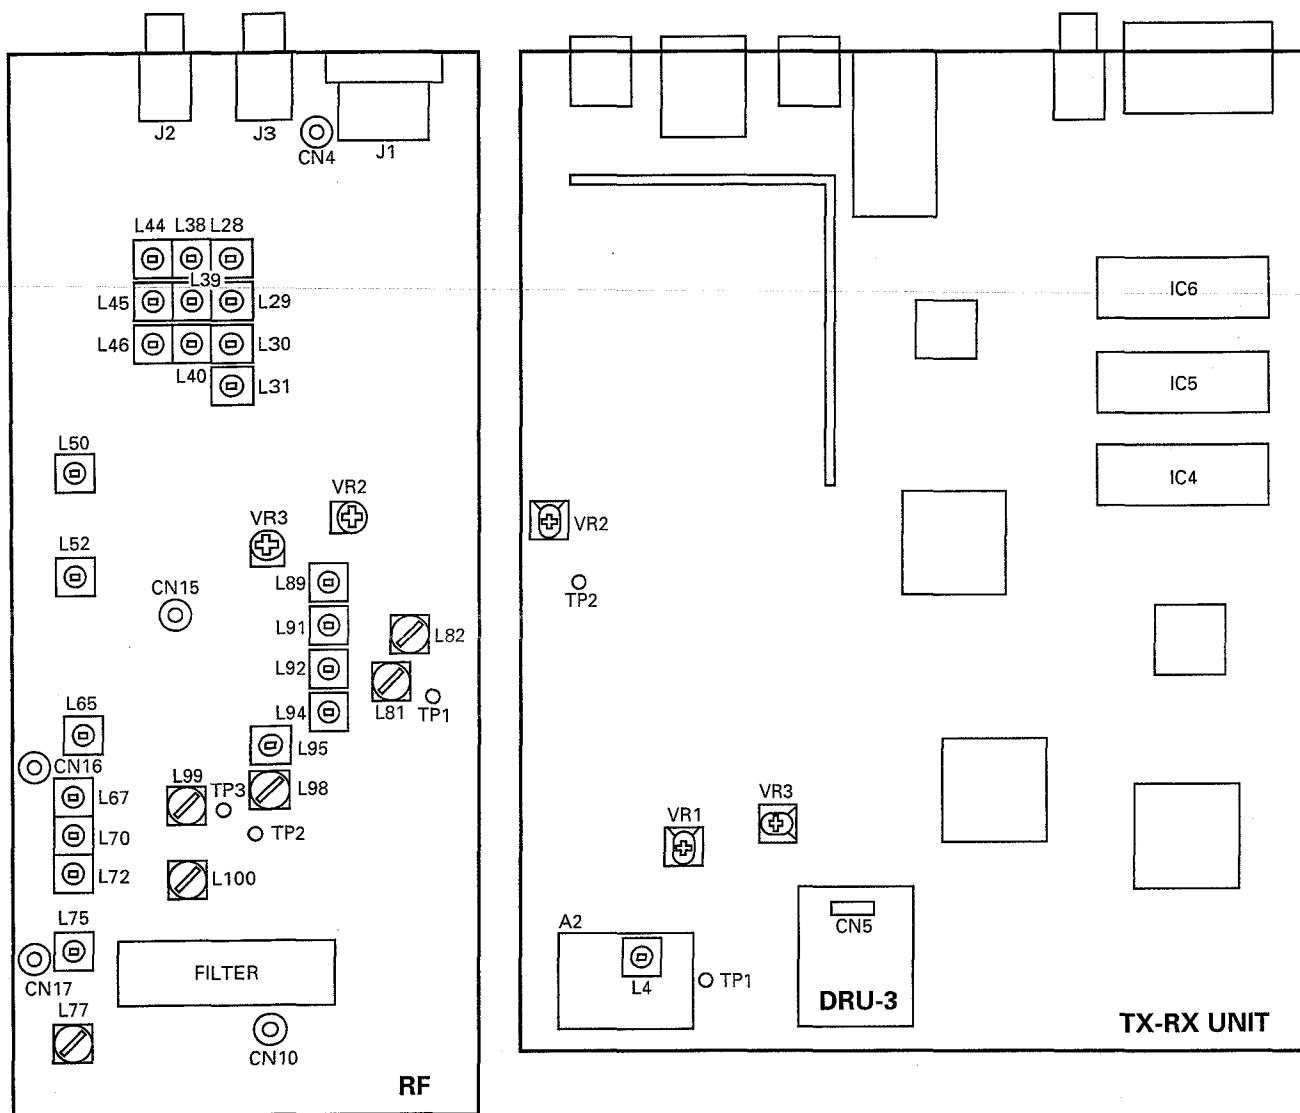

RF (X44-3210-00) (A/9)

- | | |
|---------------------------|------------------|
| VR2 | : Spurious adj. |
| VR3,L89,91,92,94,95,98,99 | : TX IF AMP adj. |
| L28~31,38~40,44~46,50,52 | : BPF adj. |
| L65,67,70,72 | : MCF adj. |
| L75,77 | : RX IF AMP adj. |
| L81,82 | : NB adj. |
| L100 | : TX MCF adj. |

TX-RX UNIT (X57-4620-00)

- | | |
|-----|--|
| VR1 | : S-meter adj. |
| VR2 | : AGC voltage adj. |
| VR3 | : DRU-3 recording level adj. (Adjusted to the mechanical center) |
| L4 | : DSP PLL lock voltage adj. |

TS-870S

TERMINAL FUNCTION

| CN No. | Pin No. | Name | Function |
|--|---------|--------|---|
| RF UNIT (X44-3210-00) (A/9) : RF | | | |
| CN2 | Coaxial | RAT | RX signal |
| CN4 | Coaxial | DRV | TX drive signal |
| CN5 | Coaxial | LO1 | 1st local oscillation 73.08~103.05MHz |
| CN6 | Coaxial | LO2A | 2nd local oscillation 64.22MHz |
| CN7 | 1 | TXB | TX 8V |
| | 2 | RXB | RX 8V |
| | 3 | AGC | AGC voltage |
| CN10 | Coaxial | TR88 | RX IF output/TX IF input 8.83MHz |
| CN13 | 1 | SPO | Speaker signal |
| | 2 | CKY | Keying signal |
| | 3 | AGC | AGC voltage |
| | 4 | TXC | TX : "H" |
| | 5 | RXC | RX : "H" |
| | 6 | 8A | Analog 8V |
| | 7 | 14S | 14V-switched |
| | 8 | GND | GND |
| CN14 | 1 | 15K | Filter selection 15kHz |
| | 2 | 3K | Filter selection 3kHz |
| | 3 | 6K | Filter selection 6kHz |
| | 4 | VSF | Forward wave detection voltage |
| | 5 | VSF | Reflected wave detection voltage |
| | 6 | ALM | ALC meter output |
| | 7 | THP | Thermal protection |
| | 8 | NC | |
| | 9 | UCK2 | RF serial/parallel convert clock |
| | 10 | UDA2 | RF serial/parallel convert data |
| | 11 | ENR1 | RF serial/parallel convertor IC1 enable |
| | 12 | ENR2 | RF serial/parallel convertor IC2 enable |
| | 13 | ENR3 | DAC enable |
| | 14 | NC | |
| | 15 | RBK | RF blank signal |
| | 16 | -6 | -6V |
| | 17 | GND | GND |
| | 18 | NC | |
| | 19 | SS | TX/RX control signal TX : "L" |
| | 20 | NC | |
| J1 | 1 | SPO | Speaker signal |
| | 2 | COM | Relay common terminal |
| | 3 | SS | TX/RX control signal |
| | 4 | MKE | TX relay close |
| | 5 | BRK | TX relay open |
| | 6 | ALC | ALC input |
| | 7 | RL | 13V output when TX |
| J2 | | EXT RX | External receiver output |
| J3 | | IF OUT | SM-230 |
| RF UNIT (X44-3210-00) (B/9) : PLL | | | |
| CN500 | 1 | GND | GND |
| | 2 | NFMT | FM modulation on/off signal (FM TX : "L") |
| | 3 | VB3 | 21.489~30MHz |
| | 4 | VB2 | 14.489~21.489MHz |
| | 5 | VB1 | 7.489~14.489MHz |
| | 6 | VBO | 0~7.489MHz |
| | 7 | UNL | Unlock detection output (Unlock : "H") |
| | 8 | GND | GND |
| | 9 | PLE2 | PLL2 enable signal (LO2A) |
| | 10 | PLE1 | PLL1 enable signal (LO1) |
| | 11 | PCK | Clock |
| | 12 | PDA | PLL, DDS data |
| | 13 | 14D | 14V |
| | 14 | DLE3 | DDS3 enable signal (LO4) |
| | 15 | DLE2 | DDS2 enable signal (LO3) |

| CN No. | Pin No. | Name | Function |
|---|---------|------|--|
| RF UNIT (X44-3210-00) (A/9) : RF | | | |
| | 16 | DLE1 | DDS1 enable signal (LO1) |
| | 17 | TXC | PLL DDS latch select signal (TX : "H") |
| | 18 | GND | GND |
| | 19 | 9P | 9V |
| | 20 | 5P | 5V |
| CN501 | 1 | GND | GND |
| | 2 | LO4 | DDS3 output |
| CN502 | Coaxial | LO3 | DDS2 output (8.375MHz) |
| CN503 | Coaxial | REF | Reference signal output for TX-RX unit (20MHz) |
| CN504 | Coaxial | LO1 | LO1 output (73.08~103.05MHz) |
| CN505 | Coaxial | LO2A | LO2A output (64.22MHz) |
| CN506 | 1 | FMD | FM modulation signal |
| | 2 | GND | GND |
| | 3 | GND | GND |
| RF UNIT (X44-3210-00) (D/9) : PHONE | | | |
| CN901 | 1 | SPI1 | Phone jack through |
| | 2 | SPG | GND |
| | 3 | SPO1 | Phone jack output |
| RF UNIT (X44-3210-00) (E, F, G, H, I/9) : VR | | | |
| CN903 | 1 | DGND | Digital GND |
| | 2 | VPWR | MIC/PWR VR 1 |
| | 3 | VMIC | MIC/PWR VR 2 |
| | 4 | VDLY | CAR/Delay VR 1 |
| | 5 | VCAR | CAR/Delay VR 2 |
| | 6 | 5D | 5V |
| CN904 | 1 | DGND | Digital GND |
| | 2 | VMON | PROC/MONI VR 1 |
| | 3 | VPRC | PROC/MONI VR 2 |
| | 4 | VKEY | AGC/KEY VR 1 |
| | 5 | VAGC | AGC/KEY VR 2 |
| | 6 | 5D | 5V |
| CN905 | 1 | NC | |
| | 2 | WENB | Width encoder B |
| | 3 | WENA | Width encoder A |
| | 4 | SENB | Shift encoder B |
| | 5 | SENA | Shift encoder A |
| | 6 | GND | GND |
| CN906 | 1 | GND | GND |
| | 2 | VRF | AF/RF VR 1 |
| | 3 | VAF | AF/RF VR 2 |
| | 4 | RENA | RIT encoder A |
| | 5 | RENB | RIT encoder B |
| | 6 | 5D | 5V |
| CN907 | 1 | GND | GND |
| | 2 | VSQL | NB/SQL VR 1 |
| | 3 | VNB | NB/SQL VR 2 |
| | 4 | CENA | M.CH encoder A |
| | 5 | CENB | M.CH encoder B |
| | 6 | 5D | 5V |
| FINAL UNIT (X45-351X-XX) (A/5) : FINAL | | | |
| CN501 | Coaxial | DRV | Drive input (From RF) |
| CN502 | Coaxial | PO | TX signal output (To FILTER) |
| CN503 | 1 | 14S | 13.8V |
| | 2 | 14S | 13.8V |
| | 3 | TXB | TX 13.8V |
| | 4 | GND | GND |
| | 5 | GND | GND |
| CN504 | 1 | 14V | 13.8V |
| | 2 | 14V | 13.8V |
| | 3 | GND | GND |

TERMINAL FUNCTION

| CN No. | Pin No. | Name | Function |
|--------|---|--|--|
| W501 | Board in | 14F 14F GND GND | Power supply 13.8V connecting harness Power supply 13.8V connecting harness Power supply 13.8V connecting harness Power supply 13.8V connecting harness |
| | | | FINAL UNIT (X45-351X-XX) (B/5) : FILTER |
| CN1 | Coaxial | PO | Filter input signal |
| CN2 | Coaxial | ATO | TX output signal (To AT) |
| CN3 | 1 2 3 4 5 6 7 8 9 10 11 12 | 8A GND GND 14S 14S UCK2 UDA2 ENF1 DGND TXB VSF VSR | 8V GND GND 14V 14V Shift register clock Shift register data Shift register enable Digital GND TX power 8V Forward wave detection voltage Reflected wave detection voltage |
| CN4 | 1 2 3 4 5 6 7 8 9 10 11 | ATA 28AT 25AT 18AT 14AT 10AT 7AT 4AT GND 14S GND | Make for AT through/on relay 24.5~30MHz 21.5~24.5MHz 18.5~21.5MHz 14.5~18.5MHz 10.5~14.5MHz 4.0~7.5MHz 2.5~4.0MHz GND 14V GND |
| W1 | 1 2 3 | RL ANTS GND | TX/RX select signal output ANT 1/2 select signal output GND |
| | | | FINAL UNIT (X45-351X-XX) (C/5) : CONNECTION |
| CN401 | 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 | 15K 3K 6K TT TS UCK2 UDA2 ENF1 VSF VSR THP 14D 14D 14V 14V PWS 9P 5P -6 GND | 455kHz filter select "L" : Filter on 455kHz filter select "L" : Filter on 455kHz filter select "L" : Filter on External AT tuning control (Pass through) External AT tuning control (Pass through) Pass through Pass through Pass through Pass through Pass through Pass through 14V 14V 14V 14V Power switch on : "H" PLL power 9V PLL power 5V -6V output GND |
| CN402 | 1 2 3 4 5 6 7 8 | 8A GND GND 14S 14S UCK2 UDA2 ENF1 | 8V GND GND 13.8V 13.8V Pass through Pass through Pass through |

| CN No. | Pin No. | Name | Function |
|--------|---|--|--|
| | 9 10 11 12 | DGND TXB VSF VSR | Digital GND TX power 8V Pass through Pass through |
| CN403 | 1 2 3 4 5 6 7 | 14A 14S 8D 8A APG SPO3 SPG | 13.8V 13.8V Digital 8V Analog 8V GND Speaker output signal input Speaker GND |
| CN404 | 1 2 | SPG SP | Speaker GND Speaker output signal |
| CN405 | 1 2 3 4 | 14S 14S AGND AGND | 13.8V 13.8V Analog GND Analog GND |
| CN406 | 1 2 3 4 5 6 7 8 9 10 11 12 13 | THP TXB 14D 8D 14D 8A GND GND 14S 14S PSW 14V | Pass through Pass through 13.8V Digital 8V 13.8V Analog 8V GND GND 13.8V 13.8V 13.8V Power switch on : "H" 13.8V |
| CN407 | 1 2 3 4 5 | 14S AGND TT TS GND | 13.8V Analog GND Pass through Pass through GND |
| CN410 | Coaxial | LO3 | Local LO3 8.375MHz (From PLL) |
| CN411 | 1 2 3 4 | TIF GND RIF GND | TX IF input GND RX IF output GND |
| CN412 | Coaxial | TR88 | 8.83MHz |
| CN413 | 1 2 3 | TXB RXB AGC | TX power 8V RX power 8V AGC line |
| | | | FINAL UNIT (X45-351X-XX) (D/5) : AVR |
| CN601 | 1 2 3 | 14V 14V GND | 13.8V 13.8V GND |
| CN602 | 1 2 3 4 | 14S 14S AGND AGND | 13.8V 13.8V Analog GND Analog GND |
| CN603 | 1 2 3 4 5 6 7 8 9 10 | THP TXB 14D 8D 14D 8A GND GND 14S 14S | Thermal protection on : "H" TX 13.8V 13.8V Digital 8V Digital 13.8V Analog 8V GND GND 13.8V 13.8V |

TS-870S

TERMINAL FUNCTION

| CN No. | Pin No. | Name | Function |
|---|---------|------|---|
| | 11 | 14S | 13.8V |
| | 12 | PSW | Power switch on : "H" |
| | 13 | 14V | 13.8V |
| CN604 | 1 | 14S | 13.8V |
| | 2 | 14S | 13.8V |
| | 3 | TXB | TX 13.8V |
| | 4 | GND | GND |
| | 5 | GND | GND |
| CN605 | 1 | MOT+ | Moter drive + |
| | 2 | MOT- | Motor drive - |
| FINAL UNIT (X45-351X-XX) (E/5) : RELAY | | | |
| CN301 | 1 | RL | TX/RX select signal input |
| | 2 | ANTS | ANT 1/2 select signal input |
| | 3 | GND | GND |
| CN302 | Coaxial | ATO | TX signal input (From FILTER) |
| CN303 | Coaxial | RAT | RX signal output (To RF) |
| CN304 | Coaxial | AT1 | Input/output to AT (RX : Output, TX : Input) |
| CN305 | Coaxial | AT2 | Input/output to AT (RX : Input, TX : Output) |
| CN306 | TP | | ANT1 GND |
| CN307 | TP | | ANT2 GND |
| W301 | TP | | ANT1 signal line |
| W303 | TP | | ANT2 signal line |
| AT UNIT (X53-3340-02) | | | |
| CN1 | Coaxial | AT1 | AT input |
| CN2 | Coaxial | AT2 | AT output |
| CN3 | 1 | VRE | +5V reference voltage for A/D |
| | 2 | POD2 | VC2 position detection, VR101 output |
| | 3 | GND | GND |
| | 4 | POD1 | VC1 position detection, VR102 output |
| CN4 | 1 | NC | |
| | 2 | M2- | Motor 2 drive - |
| | 3 | M2+ | Motor 2 drive + |
| | 4 | M1- | Motor 1 drive - |
| | 5 | M1+ | Motor 1 drive + |
| CN5 | 1 | NC | |
| | 2 | F15 | Power line 11~14V |
| | 3 | GND | GND |
| CN6 | 1 | ATA | Make for AT through/on relay "L" : On |
| | 2 | NC | |
| CN7 | 1 | ATG | GND for discriminating that is connected to microcomputer |
| | 2 | SPED | Motor speed control pulse |
| | 3 | APRE | Control selection |
| | 4 | VRE | "H" : Preset type, "L" : Auto tuning type |
| | 5 | PR22 | +5V reference voltage for A/D |
| | 6 | PR21 | Motor 2 control signal |
| | 7 | POD2 | Motor 2 control signal |
| | 8 | PR12 | VC2 position detection |
| | 9 | PR11 | Motor 1 control signal |
| | 10 | POD1 | Motor 1 control signal |
| | 11 | GND | VC1 position detection |
| CN101 | 1 | 28AT | 24.5~30MHz |
| | 2 | 15AT | 21.5~24.5MHz |
| | 3 | NC | |
| | 4 | 18AT | 18.5~21.5MHz |
| | 5 | 14AT | 14.5~18.5MHz |
| | 6 | 10AT | 10.5~14.5MHz |
| | 7 | 7AT | 4.0~7.5MHz |
| | 8 | 4AT | 2.5~4.0MHz |

| CN No. | Pin No. | Name | Function |
|---|---------|------|---|
| | 9 | GND | GND |
| CONTROL UNIT (X53-356X-XX) (A/4) : CONTROL | | | |
| CN1 | 1 | GND | GND |
| | 2 | NFMT | Not FM TX signal |
| | 3 | VB3 | VCO selest signal |
| | 4 | VB2 | VCO select signal |
| | 5 | VB1 | VCO select signal |
| | 6 | VB0 | VCO select signal |
| | 7 | UNL | PLL unlock signal |
| | 8 | GND | GND |
| | 9 | PLE2 | PLL2 enable signal |
| | 10 | PLE1 | PLL1 enable signal |
| | 11 | PCK | PLL serial clock |
| | 12 | PDA | PLL serial data |
| | 13 | 14D | Digital 13.8V |
| | 14 | DLE3 | DDS3 enable signal |
| | 15 | DLE2 | DDS2 enable signal |
| | 16 | DLE1 | DDS1 enable signal |
| | 17 | TXC | TX control signal |
| | 18 | GND | GND |
| | 19 | 9P | PLL power 9V (Pass through) |
| | 20 | 5P | PLL power 5V (Pass through) |
| CN2 | 1 | GND | GND |
| | 2 | -6 | -6V (Pass through) |
| | 3 | 5P | PLL power 5V (Pass through) |
| | 4 | 9P | PLL power 9V (Pass through) |
| | 5 | PSW | Power control signal |
| | 6 | 14V | 13.8V |
| | 7 | 14V | 13.8V |
| | 8 | 14D | Digital 13.8V |
| | 9 | 14D | Digital 13.8V |
| | 10 | THP | Thermal protection |
| | 11 | VSR | Reflected wave analog voltage |
| | 12 | VSF | Forward wave analog voltage |
| | 13 | ENF1 | Enable for IC1 on FILTER board |
| | 14 | UDA2 | Serial data for IC1 on FILTER board |
| | 15 | UCK2 | Serial clock for IC1 on FILTER board |
| | 16 | TS | AT-300 control signal |
| | 17 | TT | AT-300 control signal |
| | 18 | 6K | 6kHz filter select signal |
| | 19 | 3K | 3kHz filter select signal |
| | 20 | 15K | 15kHz filter select signal |
| CN3 | 1 | 5D | Digital 5V |
| | 2 | MENA | Main encoder pulse A |
| | 3 | MENB | Main encoder pulse B |
| | 4 | DGND | Digital GND |
| CN4 | 1 | NC | |
| | 2 | NC | |
| | 3 | SPED | Internal AT speed control signal |
| | 4 | APRE | Internal AT control select signal |
| | 5 | VRE | Reference voltage for A/D convertor |
| | 6 | PR22 | Motor 2 control signal |
| | 7 | PR21 | Motor 2 control signal |
| | 8 | POD2 | Motor 2 position voltage |
| | 9 | PR12 | Motor 1 control signal |
| | 10 | PR11 | Motor 1 control signal |
| | 11 | POD1 | Motor 1 position voltage |
| | 12 | GND | GND |
| CN5 | 1 | GND | GND |
| | 2 | CTS | Communication inhibit signal from TS-870S |
| | 3 | RTS | Communication inhibit signal from personal computer |
| | 4 | RXD | TX data from TS-870S |
| | 5 | TXD | RX data from personal computer |

TS-870S

TERMINAL FUNCTION

| CN No. | Pin No. | Name | Function | CN No. | Pin No. | Name | Function |
|--|---------|-------|--------------------------------------|--------|---------|------|------------------------------------|
| CN6 | 6 | KEYS | Key jack sensing signal | CN9 | 1 | BLNK | LED goes off control signal |
| | 7 | DASH | Electronic keyer dash signal | | 2 | K0 | Key input 0 |
| | 8 | DOT | Electronic keyer dot signal | | 3 | K1 | Key input 1 |
| | 9 | GND | GND | | 4 | K2 | Key input 2 |
| | 10 | H0 | DSP control data bus | | 5 | K3 | Key input 3 |
| | 11 | H1 | DSP control data bus | | 6 | K4 | Key input 4 |
| | 12 | H2 | DSP control data bus | | 7 | K5 | Key input 5 |
| | 13 | H3 | DSP control data bus | | 8 | K6 | Key input 6 |
| | 14 | H4 | DSP control data bus | | 9 | K7 | Key input 7 |
| | 15 | H5 | DSP control data bus | | 10 | PSW | Power switch input signal |
| | 16 | H6 | DSP control data bus | | 11 | ENL4 | Enable for IC501 on SW board |
| | 17 | H7 | DSP control data bus | | 12 | ENL1 | Enable for IC502~504 on SW board |
| | 18 | HENA | DSP A enable signal | | 13 | UDA1 | Serial data for SW board |
| | 19 | HENB | DSP B enable signal | | 14 | UCK1 | Serial clock for SW board |
| | 20 | HRW | DSP read/write control signal | | 15 | LATC | AT tune LED control signal |
| | 1 | GND | GND | | 16 | TXC | TX control signal (TX LED control) |
| | 2 | HA0 | DSP control address bus | | 17 | RES | IC501~504 reset signal |
| | 3 | HA1 | DSP control address bus | | 18 | 5V | 5V |
| | 4 | HA2 | DSP control address bus | | 19 | 5D | Digital 5V |
| | 5 | GND | GND | | 20 | DGND | Digital GND |
| CN7 | 6 | BEEP | Beep control signal | CN10 | 1 | NC | |
| | 7 | MD | Microphone down signal | | 2 | WENB | Width encoder pulse B |
| | 8 | MU | Microphone up signal | | 3 | WEBA | Width encoder pulse A |
| | 9 | SS | Standby switch | | 4 | SENB | Shift encoder pulse B |
| | 10 | GND | GND | | 5 | SENA | Shift encoder pulse A |
| | 11 | KEY | Key down signal | | 6 | GND | GND |
| | 12 | DRST | DSP reset signal | | 7 | NC | |
| | 13 | CKY | TX wave control signal | | 8 | 5D | Digital 5V |
| | 14 | RXC | RX control signal | | 9 | RENB | RIT encoder pulse B |
| | 15 | TXC | TX control signal | | 10 | RENA | RIT encoder pulse A |
| | 16 | AMUT | AF mute signal | | 11 | VAF | AF VR analog voltage |
| | 17 | VCEN | TX-RX unit IC26 enable | | 12 | VRF | RF VR analog voltage |
| | 18 | UCK2 | TX-RX unit serial clock | | 13 | GND | GND |
| | 19 | UDA2 | TX-RX unit serial data | | 14 | NC | |
| | 20 | DREN | DRU-3 control enable signal | | 15 | 5D | Digital 5V |
| | 21 | PLUL | TX-RX unit PLL unlock signal | | 16 | CENB | Click encoder pulse B |
| | 22 | PLEN | TX-RX unit PLL control enable signal | | 17 | CENA | Click encoder pulse A |
| | 23 | EOM | DRU-3 end of message | | 18 | VNB | NB VR analog voltage |
| | 24 | VBSY | VS-2 busy signal | | 19 | VSQI | SQL VR analog voltage |
| | 25 | STR | VS-2 synthesize control signal | | 20 | GND | GND |
| | 26 | GND | GND | CN11 | 1 | NC | |
| CN8 | 1 | 5D | Digital 5V | | 2 | SS | Standby switch |
| | 2 | VAGC | AGC VR analog voltage | | 3 | NC | |
| | 3 | VKEY | KEY VR analog voltage | | 4 | GND | GND |
| | 4 | VPRC | PROC VR analog voltage | | 5 | -6 | -6V |
| | 5 | VMON | MONI VR analog voltage | | 6 | RBK | RF mute signal |
| | 6 | DGND | Digital GND | | 7 | NC | |
| | 7 | NC | | | 8 | ENR3 | Enable for IC7 on RF board |
| | 8 | 5D | Digital 5V | | 9 | ENR2 | Enable for IC2 on RF board |
| | 9 | VCAR | CAR VR analog voltage | | 10 | ENR1 | Enable for IC1 on RF board |
| | 10 | VDLY | DELAY VR analog voltage | | 11 | UDA2 | Serial data for RF board |
| | 11 | VMIC | MIC VR analog voltage | | 12 | UCK2 | Serial clock for RF board |
| | 12 | VPWR | PWR VR analog voltage | | 13 | NC | |
| | 13 | DGND | Digital GND | | 14 | THP | Thermal protection |
| CN501 | 1 | 5D | Digital 5V | | 15 | ALM | ALC meter analog voltage |
| | 2 | 14D | Digital 13.8V | | 16 | VSR | Reflected wave analog voltage |
| | 3 | 14D | Digital 13.8V | | 17 | VSF | Forward wave analog voltage |
| | 4 | ENL2 | LCD driver control enable signal | | 18 | 6K | 6kHz filter select signal |
| | 5 | ENL3 | LCD driver control enable signal | | 19 | 3K | 3kHz filter select signal |
| | 6 | UDA1 | LCD driver control serial data | | 20 | 15K | 15kHz filter select signal |
| | 7 | UCK1 | LCD driver control serial clock | | | | |
| | 8 | BLANK | LCD goes off control signal | | | | |
| | 9 | DIM | LCD dimmer control signal | | | | |
| | 10 | GND | GND | | | | |
| CONTROL UNIT (X53-356X-XX) (B/4) : SW | | | | | | | |
| CN501 | | | | | | | |
| 1 DGND | | | | | | | |
| 2 5D | | | | | | | |

TS-870S

TERMINAL FUNCTION

| CN No. | Pin No. | Name | Function | CN No. | Pin No. | Name | Function |
|---|---------|------|------------------------------------|--------|---------|------|--|
| | 3 | 5V | 5V | | 2 | HA0 | DSP data address |
| | 4 | RES | IC501~504 reset signal | | 3 | HA1 | DSP data address |
| | 5 | TXC | TX control signal (TX LED control) | | 4 | HA2 | DSP data address |
| | 6 | LATC | AT tune LED control signal | | 5 | GND | GND |
| | 7 | UCK1 | Serial clock | | 6 | BEEP | Beep control signal |
| | 8 | UDA1 | Serial data | | 7 | MD | Microphone down signal |
| | 9 | ENL1 | IC502~504 enable | | 8 | MU | Microphone up signal |
| | 10 | ENL4 | IC501 enable | | 9 | SS | Standby switch |
| | 11 | PSW | Power switch output signal | | 10 | GND | GND |
| | 12 | K7 | Key output 7 | | 11 | KEY | Key down signal |
| | 13 | K6 | Key output 6 | | 12 | DRST | DSP reset signal |
| | 14 | K5 | Key output 5 | | 13 | CKY | TX wave control signal |
| | 15 | K4 | Key output 4 | | 14 | RXC | RX control signal |
| | 16 | K3 | Key output 3 | | 15 | TXC | TX control signal |
| | 17 | K2 | Key output 2 | | 16 | AMUT | AF mute signal |
| | 18 | K1 | Key output 1 | | 17 | VCEN | IC26 enable |
| | 19 | K0 | Key output 0 | | 18 | UCK2 | Serial clock for TX-RX unit |
| | 20 | BLNK | LED goes off control signal | | 19 | UDA2 | Serial data for TX-RX unit |
| CONTROL UNIT (X53-356X-XX) (D/4) : MIC | | | | | | | |
| CN902 | 1 | SS | Standby switch | | 20 | DREN | DRU-3 enable |
| | 2 | MD | Microphone down signal | | 21 | PLUL | TX-RX unit PLL unlock signal output |
| | 3 | MU | Microphone up signal | | 22 | PLEN | TX-RX unit PLL enable |
| | 4 | 8M | 8V for microphone | | 23 | EOM | DRU-3 end of message signal output |
| | 5 | MCG | GND | | 24 | VBSY | VS-2 busy signal |
| | 6 | MSG | MIC GND | | 25 | STR | VS-2 synthesize control signal |
| | 7 | MIC | Microphone signal output | | 26 | GND | GND |
| TX-RX UNIT (X57-4620-00) | | | | | | | |
| CN1 | 1 | TIF | TX IF output (455kHz) | CN8 | 1 | GND | GND |
| | 2 | GND | TIF GND | | 2 | CTS | TX inhibit signal from TS-870S |
| | 3 | RIF | RX IF input (455kHz) | | 3 | RTS | TX inhibit signal from personal computer |
| | 4 | GND | RIF GND | | 4 | RXD | TX data from TS-870S |
| CN3 | 1 | LO4 | Local 4 input (466kHz) | | 5 | TXD | RX data from personal computer |
| | 2 | GND | LO4 GND | | 6 | KEYS | Key jack sensing signal |
| | 3 | FMD | FM modulation output (To PLL) | | 7 | DASH | Electronic keyer dash signal |
| | 4 | GND | FMD GND | | 8 | DOT | Electronic keyer dot signal |
| CN4 | 1 | MIC | Microphone signal input | | 9 | GND | GND |
| | 2 | MSG | MIC GND | | 10 | H0 | DSP data bus |
| | 3 | MCG | GND | | 11 | H1 | DSP data bus |
| | 4 | SS | Microphone standby switch | | 12 | H2 | DSP data bus |
| | 5 | MU | Microphone up | | 13 | H3 | DSP data bus |
| | 6 | MD | Microphone down | | 14 | H4 | DSP data bus |
| | 7 | 8M | 8V for microphone | | 15 | H5 | DSP data bus |
| CN5 | 1 | GND | GND | | 16 | H6 | DSP data bus |
| | 2 | DRMG | MIC GND | | 17 | H7 | DSP data bus |
| | 3 | DRM | Microphone signal output | | 18 | HENA | DSP A enable signal |
| | 4 | DRO | DRU-3 playback signal input | | 19 | HENB | DSP B enable signal |
| | 5 | 5D | Digital 5V for DRU-3 | | 20 | HRW | DSP read/write control signal |
| | 6 | GND | GND | CN9 | 1 | 14A | Analog 13.8V |
| | 7 | EOM | End of message (End : "H") | | 2 | 8D | Digital 8V |
| | 8 | OVF | Over flow signal (Over flow : "L") | | 3 | 14S | 13.8V |
| | 9 | DREN | DRU-3 enable | | 4 | 8A | Analog 8V |
| | 10 | SD | DRU-3 serial data | | 5 | APG | GND |
| | 11 | SCK | DRU-3 clock | CN10 | 1 | SPI1 | AF input when headphone through |
| CN6 | 1 | VO | Audio signal | | 2 | SPG | GND |
| | 2 | GND | GND | | 3 | SPO1 | Headphone AF output |
| | 3 | SD | VS-2 control data | CN11 | 1 | GND | GND |
| | 4 | SCK | VS-2 control data clock | | 2 | 14S | 13.8V |
| | 5 | BSY | VS-2 busy | | 3 | 8A | Analog 8V |
| | 6 | STR | VS-2 synthesize control | | 4 | RXC | RX : "L" |
| | 7 | 5C | 5V for VS-2 | | 5 | TXC | TX : "H" |
| | 8 | GND | GND | | 6 | AGC | AGC voltage |
| CN7 | 1 | GND | GND | | 7 | CKY | Keying signal |
| | | | | | 8 | SPO1 | Speaker signal output |
| | | | | CN12 | 1 | SPO3 | Internal speaker AF output |
| | | | | | 2 | SPG | GND |

TS-870S

TERMINAL FUNCTION

| CN No. | Pin No. | Name | Function |
|--------------|---------|------|--|
| CN13 | Coaxial | REF | 20MHz reference signal for PLL, DPS (From PLL) |
| J1 EXT.SP | 1 | GND | GND |
| | 2 | NC | |
| | 3 | NC | |
| | 4 | | External speaker signal output |
| | 5 | | Signal input when external speaker not connected |
| J2 Paddle | 1 | GND | GND |
| | 2 | NC | |
| | 3 | NC | |
| | 4 | NC | |
| | 5 | DASH | Electronic keyer dash signal |
| | 6 | DOT | Electronic keyer dot signal |
| | 7 | NC | |
| | 8 | NC | |
| | 9 | NC | |
| | 10 | KEYS | Key switch signal |
| | 11 | KEYS | Open when using paddle |
| J4 RTTY | 1 | | GND |
| | 2 | | RTTY signal |
| | 3 | | GND |
| | 4 | | RTTY signal |
| J5 ACC2 | 1 | NC | |
| | 2 | NC | |
| | 3 | ANO | RX audio output |
| | 4 | GND | ANO GND |
| | 5 | PSQ | Squelch open : GND, Squelch close : open |
| | 6 | SMET | S-meter voltage output |
| | 7 | NC | |
| | 8 | GND | |
| | 9 | PKS | GND |
| | 10 | NC | Standby switch when using PKD input (Front panel microphone input is muted) |
| | 11 | PKD | TX input |
| | 12 | GND | PKD GND |
| | 13 | SS | Standby switch |

| CN No. | Pin No. | Name | Function |
|-----------|---------|------|--|
| J6 KEY | 1 | GND | GND |
| | 2 | GND | GND |
| | 3 | KEYS | Key jack sensing signal |
| | 4 | NC | |
| | 5 | KEY | Key down signal |
| J7 COM | 1 | GND | GND |
| | 2 | NC | |
| | 3 | TXD | RX data from personal computer |
| | 4 | RXD | TX data from TS-870S |
| | 5 | NC | |
| | 6 | NC | |
| | 7 | CTS | TX inhibit signal from TS-870S |
| | 8 | RTS | TX inhibit signal from personal computer |
| | 9 | NC | |


LCD ASSY (B38-0736-05)

| | | | |
|-----|----|-------|----------------------------------|
| CN1 | 1 | GND | GND |
| | 2 | DIM | LCD dimmer control signal |
| | 3 | BLANK | LCD goes off control signal |
| | 4 | UCK1 | LCD driver control serial clock |
| | 5 | UDA1 | LCD driver control serial data |
| | 6 | ENL3 | LCD driver control enable signal |
| | 7 | ENL2 | LCD driver control enable signal |
| | 8 | 14D | Digital 13.8V |
| | 9 | 14D | Digital 13.8V |
| | 10 | 5D | Digital 5V |

TS-870S PC BOARD VIEWS


LCD ASSY (B38-0736-05)

Component side view

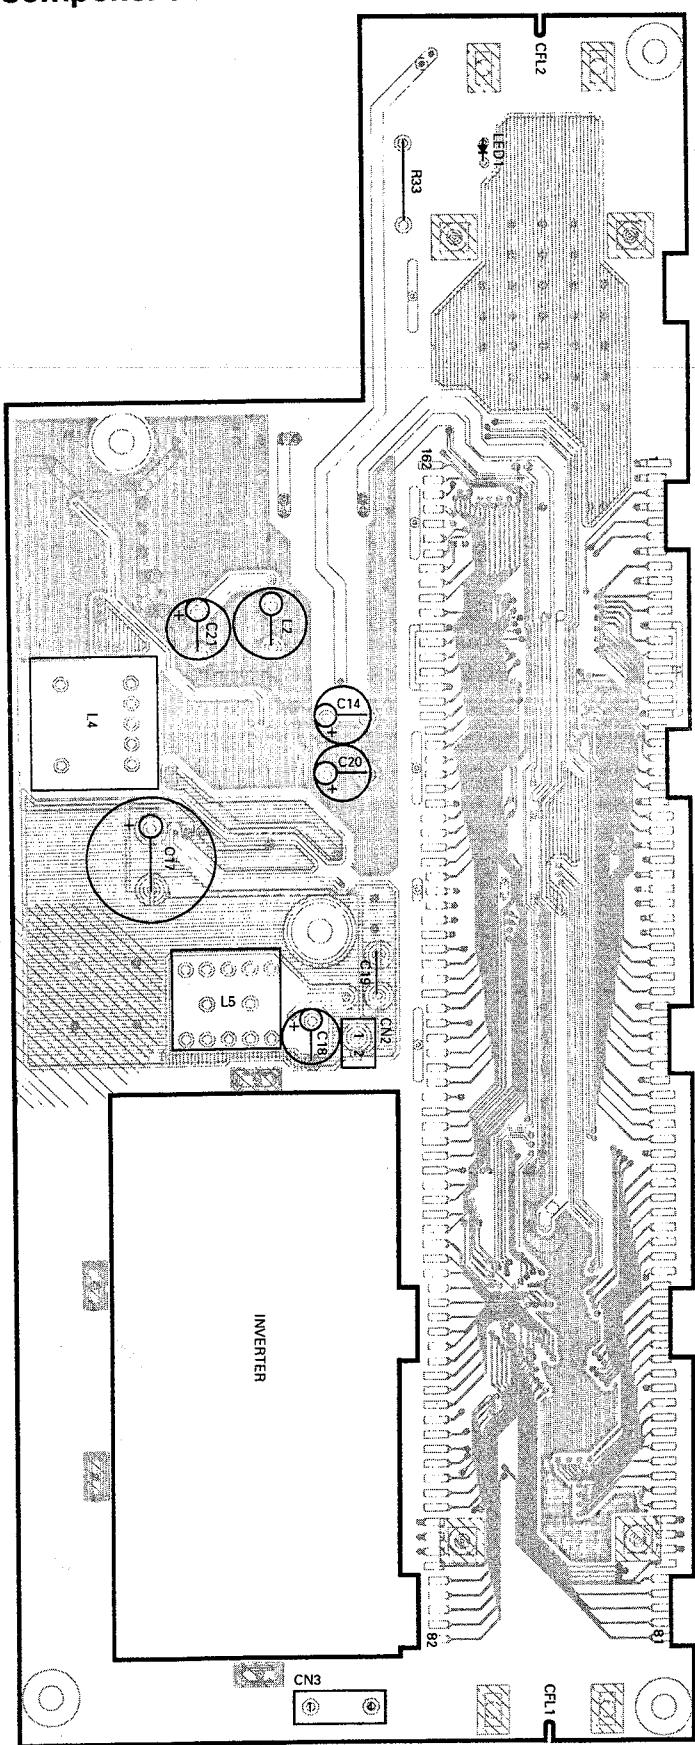

LCD ASSY (B38-0736-05)

Foil side view

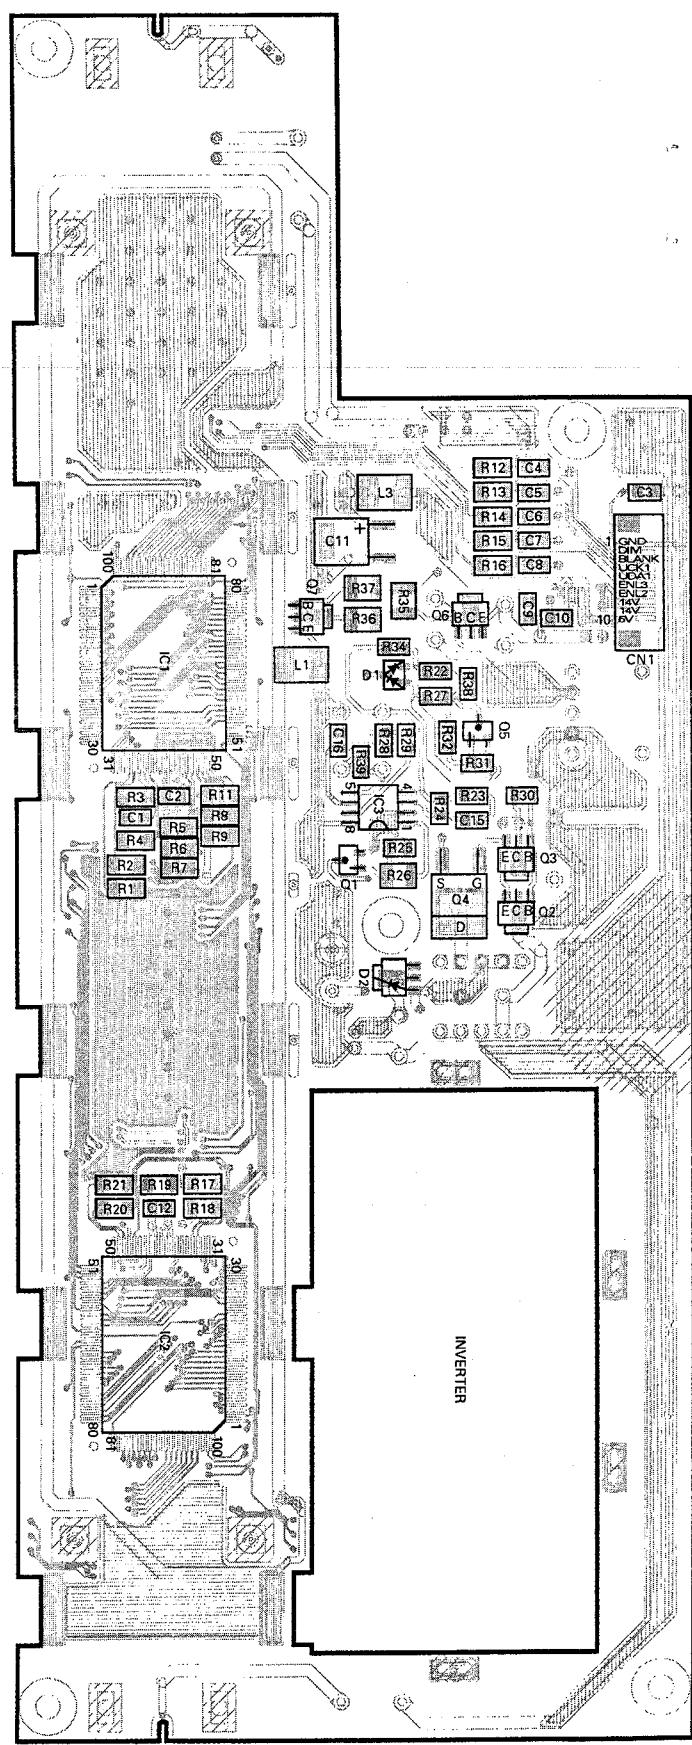

A

B

C

D

E

F

G

H




I

J

LCD ASSY (B38-0736-05)

CIRCUIT DIAGRAM TS-870S

LCD ASSY (B38-0736-05)

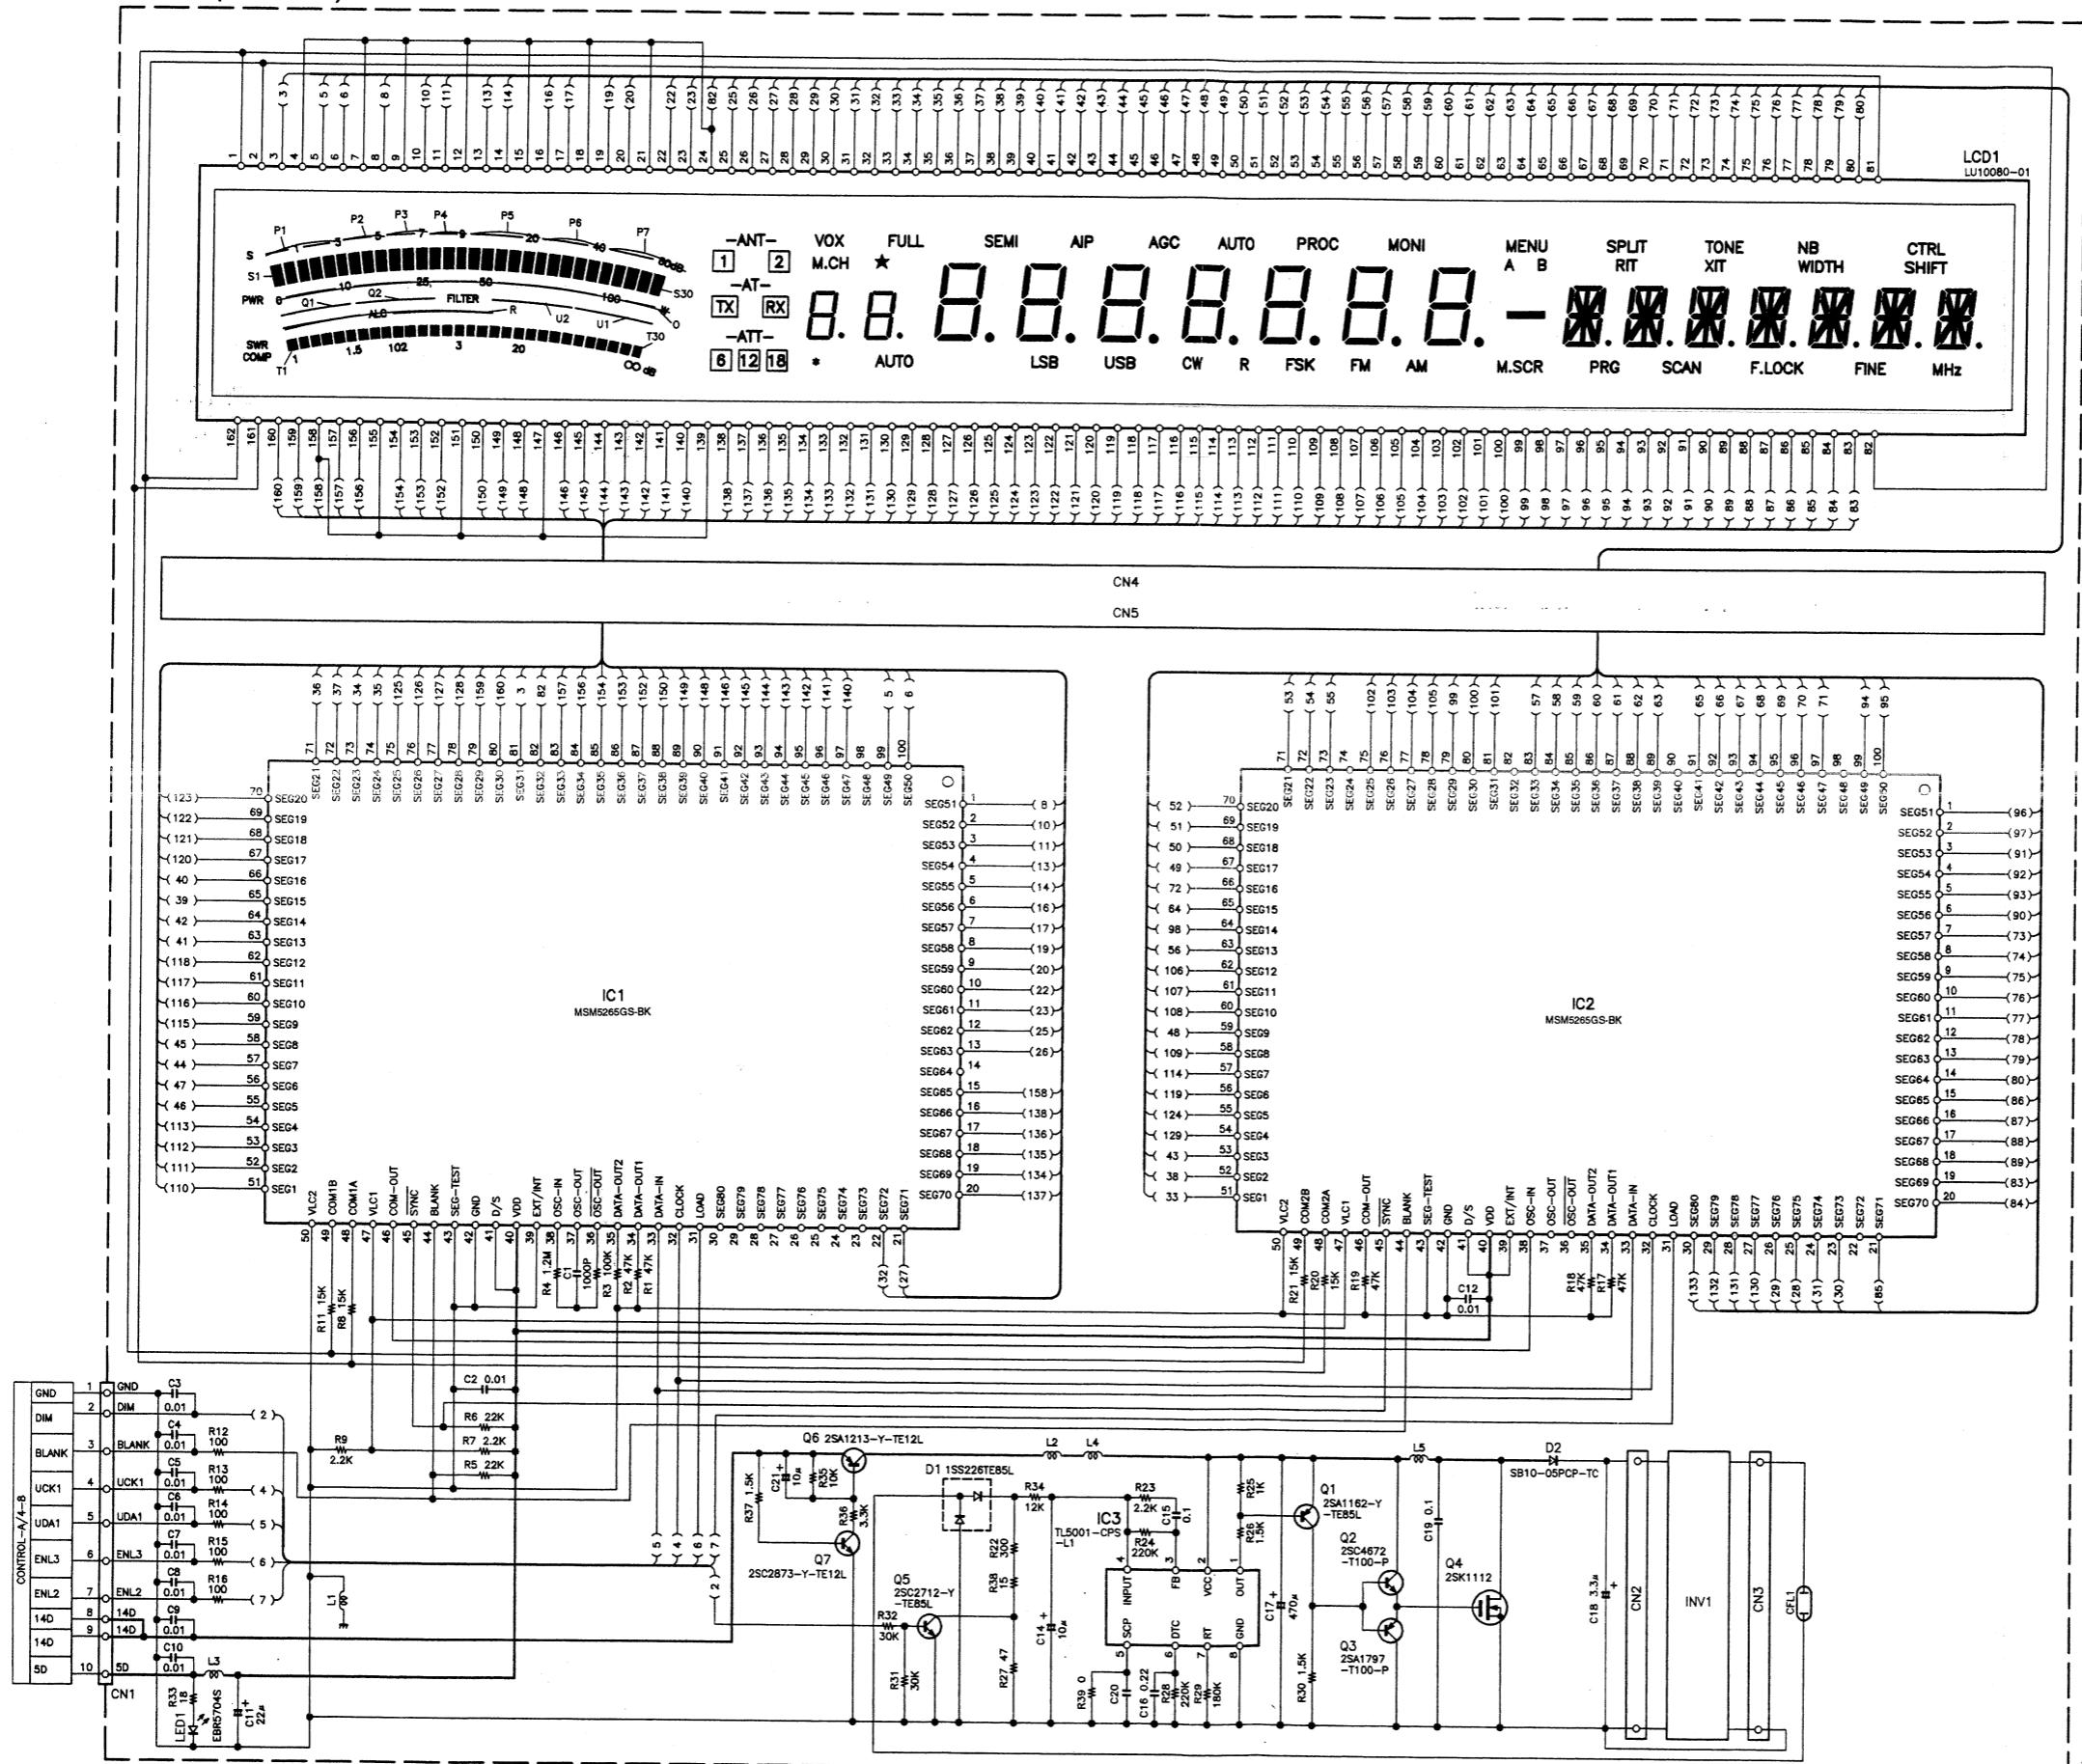IC1,2 : MSM5265GS-BK
IC3 : TL5001-CP-L1D1 : 1SS226TE85L
D2 : SB10-05PCP-TC


LCD1 : LU10080-01

LED1 : EBR5704S

Q1 : 2SA1162-Y-TE85L
Q2 : 2SC4672-T100-P
Q3 : 2SA1797-T100-P
Q4 : 2SK1112
Q5 : 2SC2712-Y-TE85L
Q6 : 2SA1213-Y-TE12L
Q7 : 2SC2873-Y-TE12L

TS-870S PC BOARD VIEW

RF UNIT (X44-3210-00) (A/9) : RF Component side view

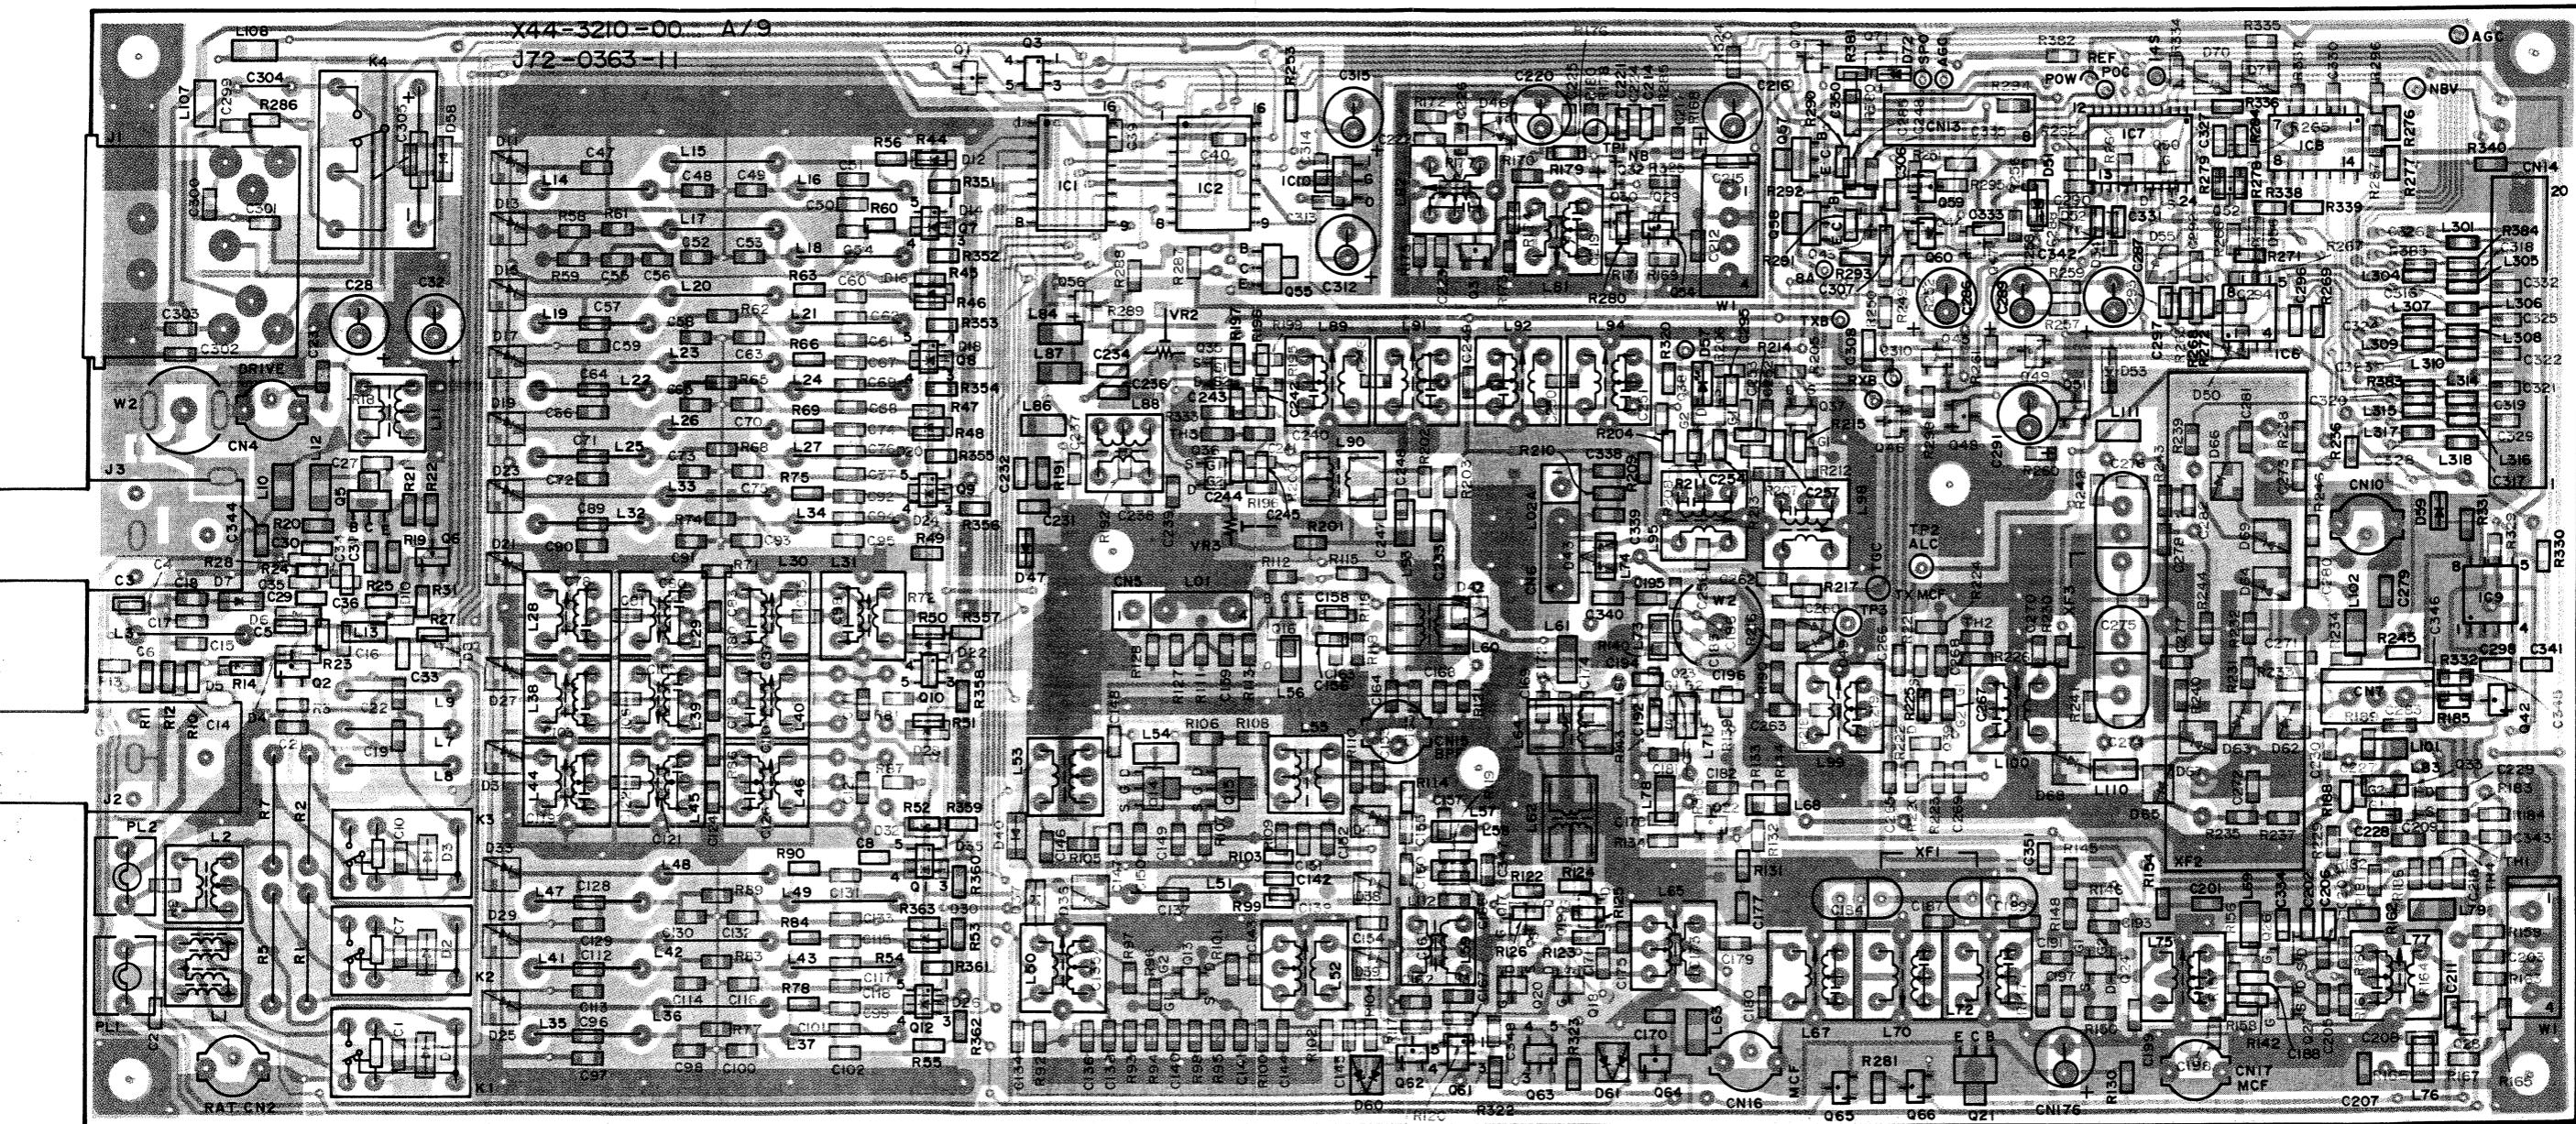

Component side
Foil side

DTA114EK
DTA124EK
DTA143EK
DTC114EK
DTC124EK

DTC143EK

DTC143TK

2SA1162

2SC2712

2SC2714

2SC2954
2SD1624
2SB1188







2SK2218

2SK208
2SK520

3SK131
3SK184


FMA1
FMC3
FMG4

NJM78L05UA




PC BOARD VIEW TS-870S

RF UNIT (X44-3210-00) (A/9) : RF Foil side view

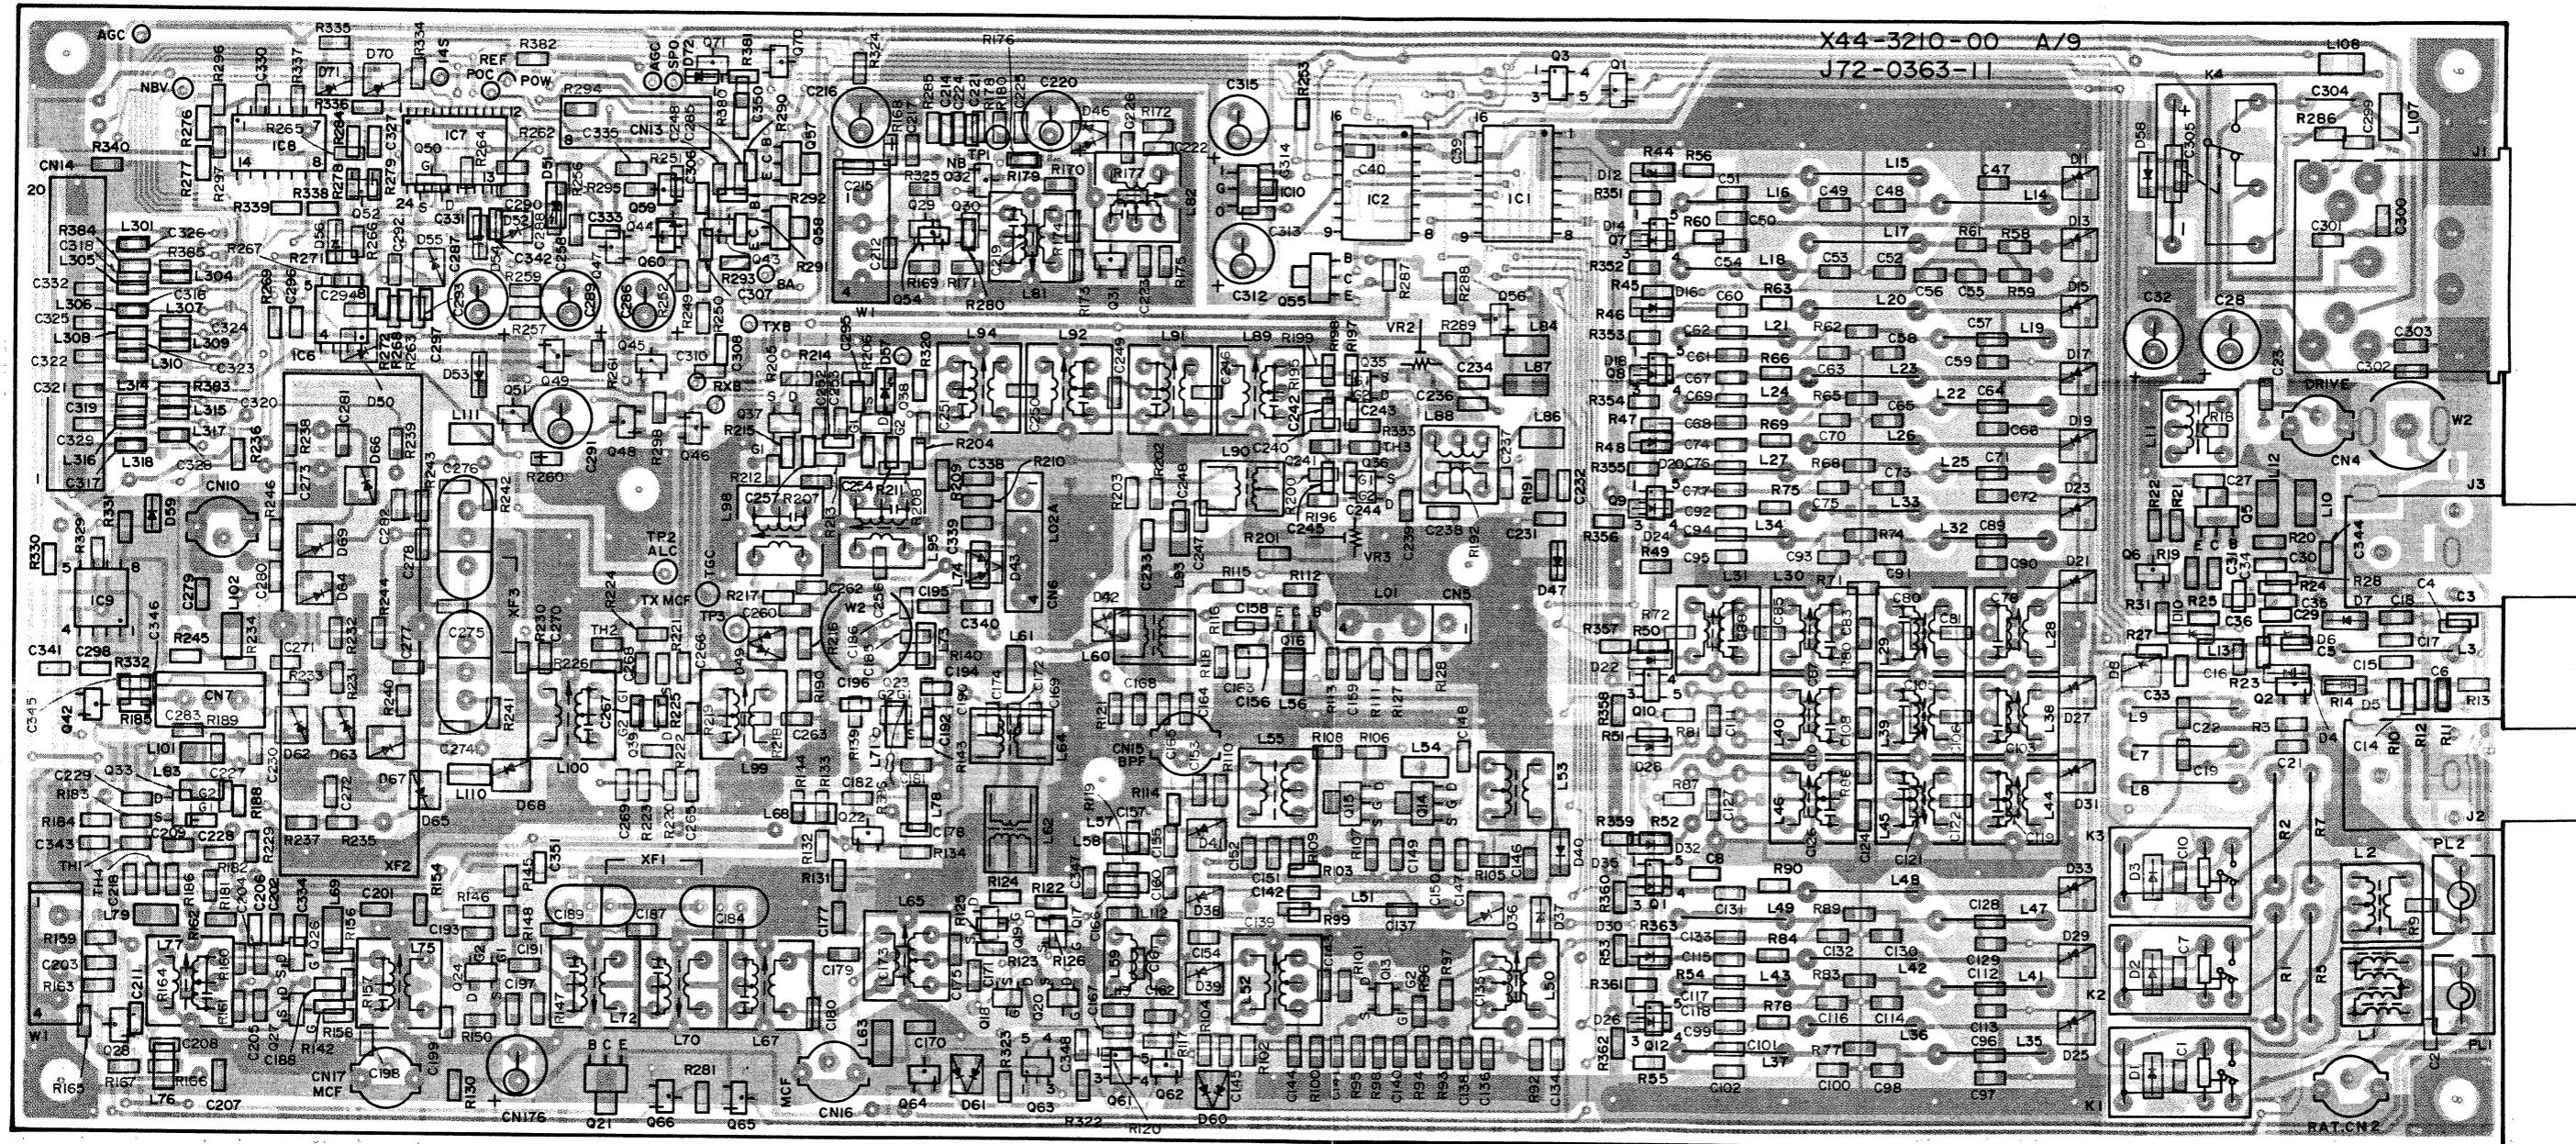


■ Component side
■ Foil side

NJM2903M
NJM2904M




NJM2902M



TC9174F




M62363F




TS-870S PC BOARD VIEWS


RF UNIT (X44-3210-00) (B/9) : PLL Component side view

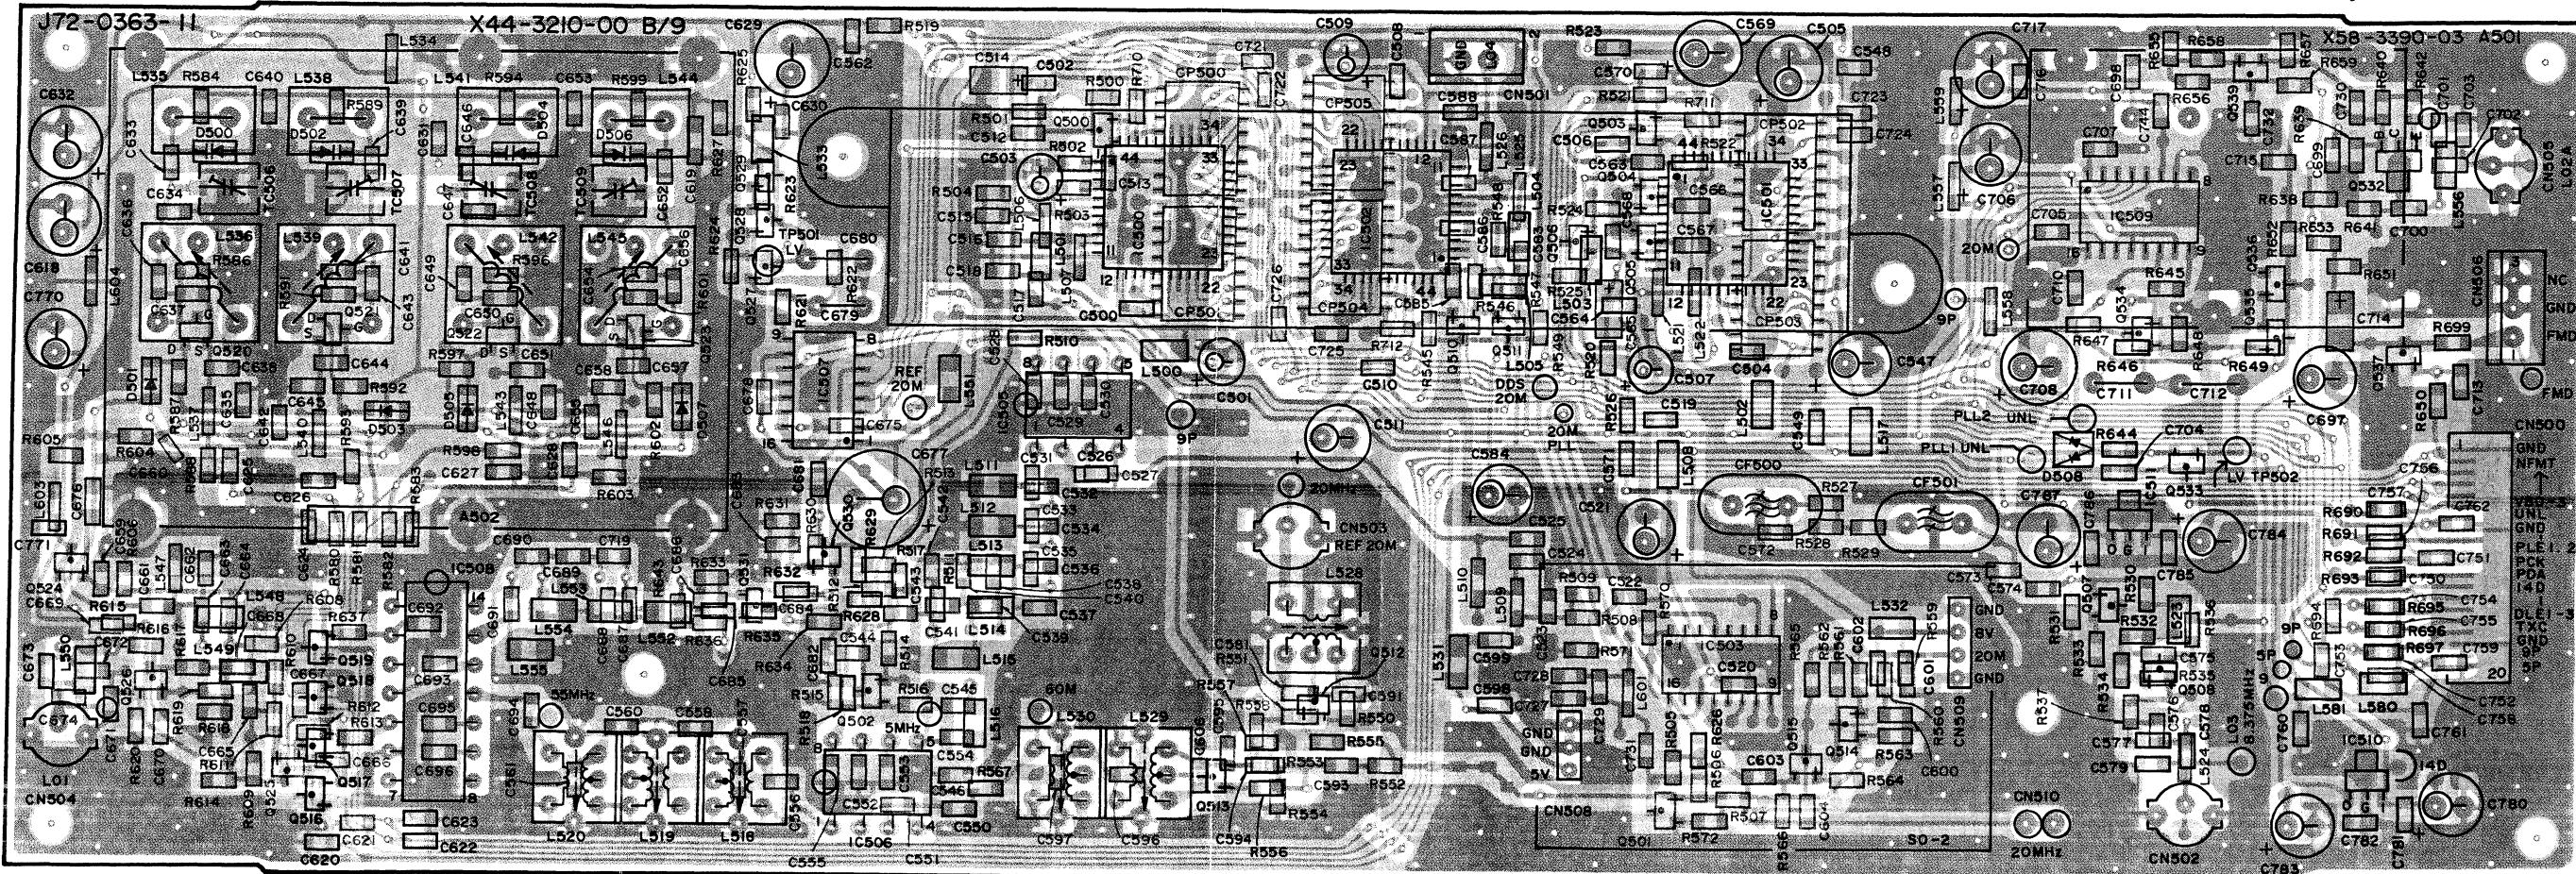


RF UNIT (X44-3210-00) (B/9) : PLL Foil side view

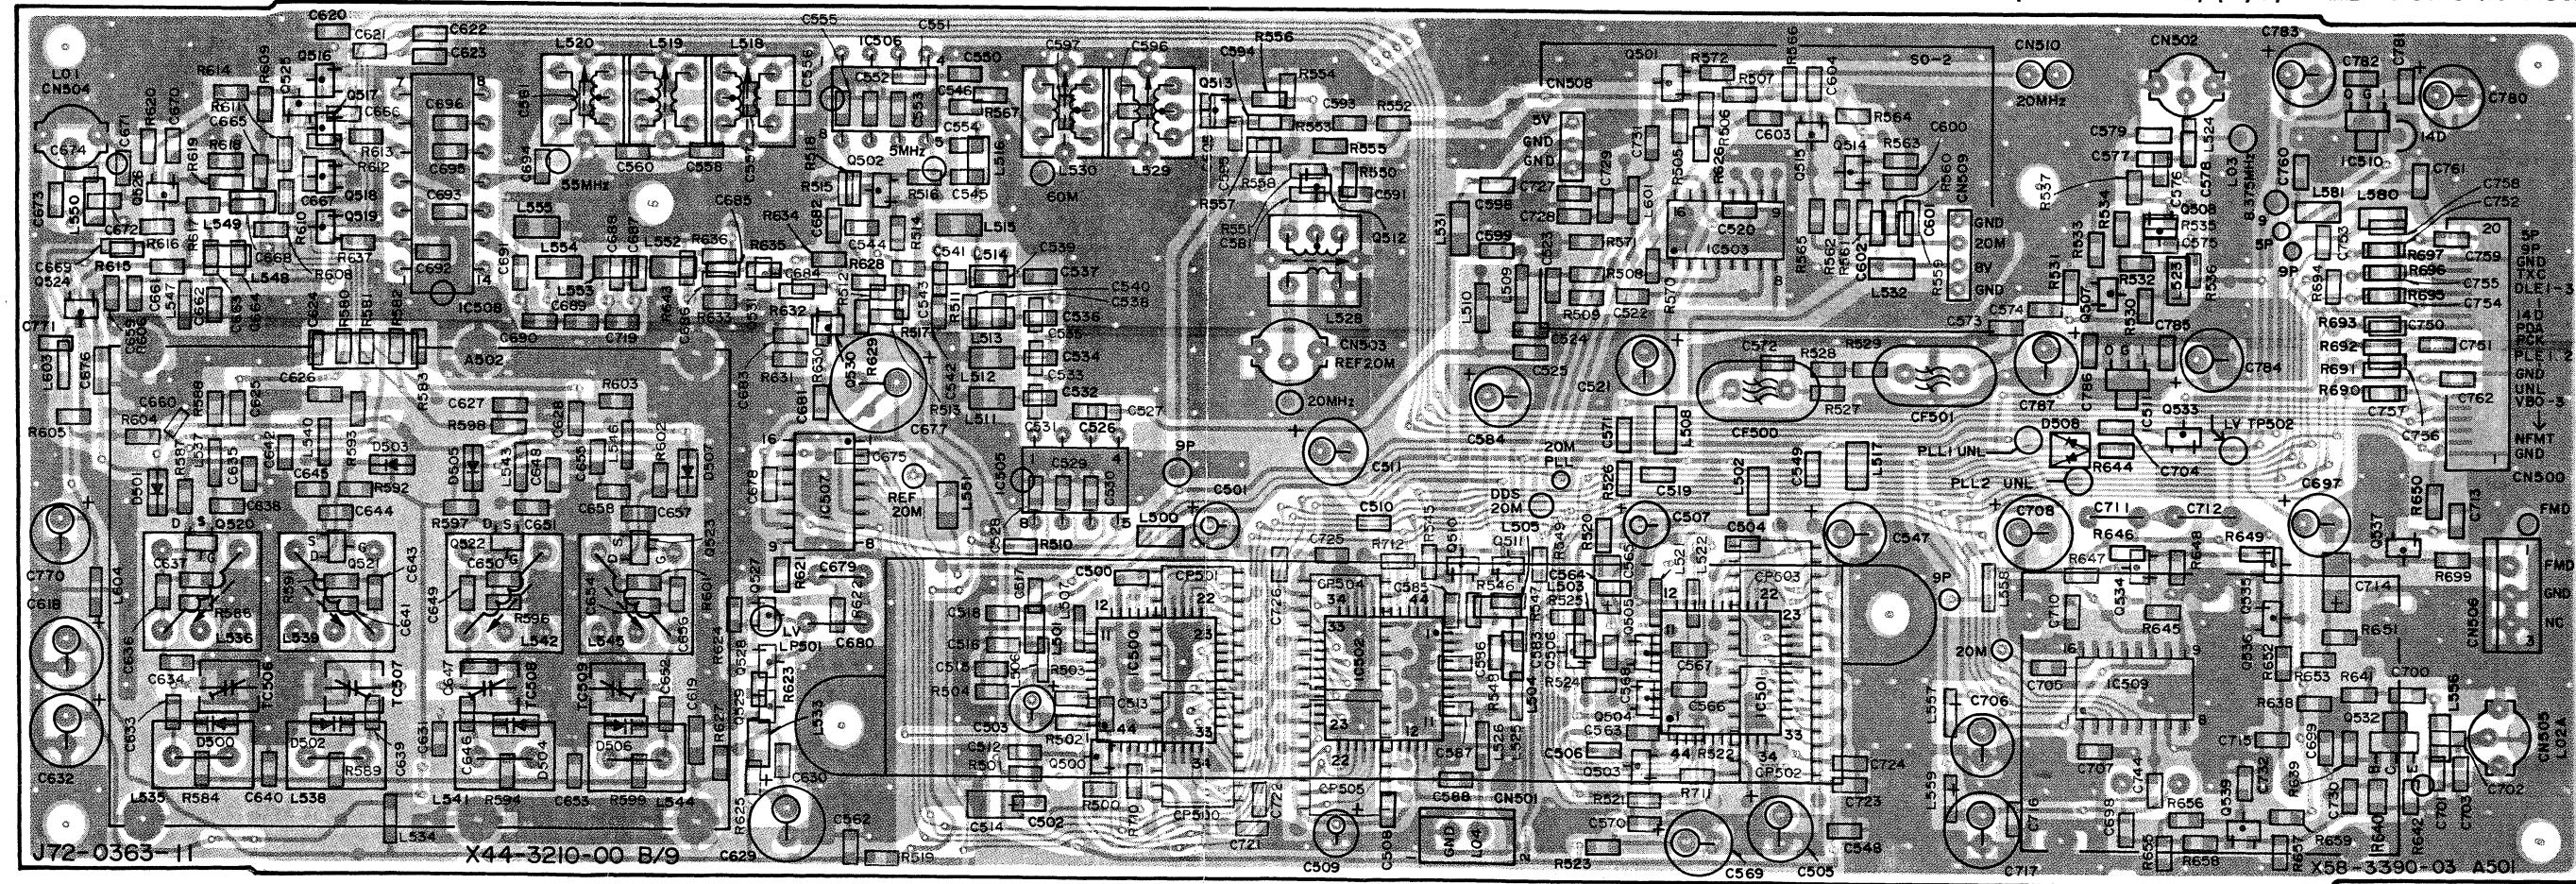

RF UNIT (X44-3210-00) (A/9) : RF

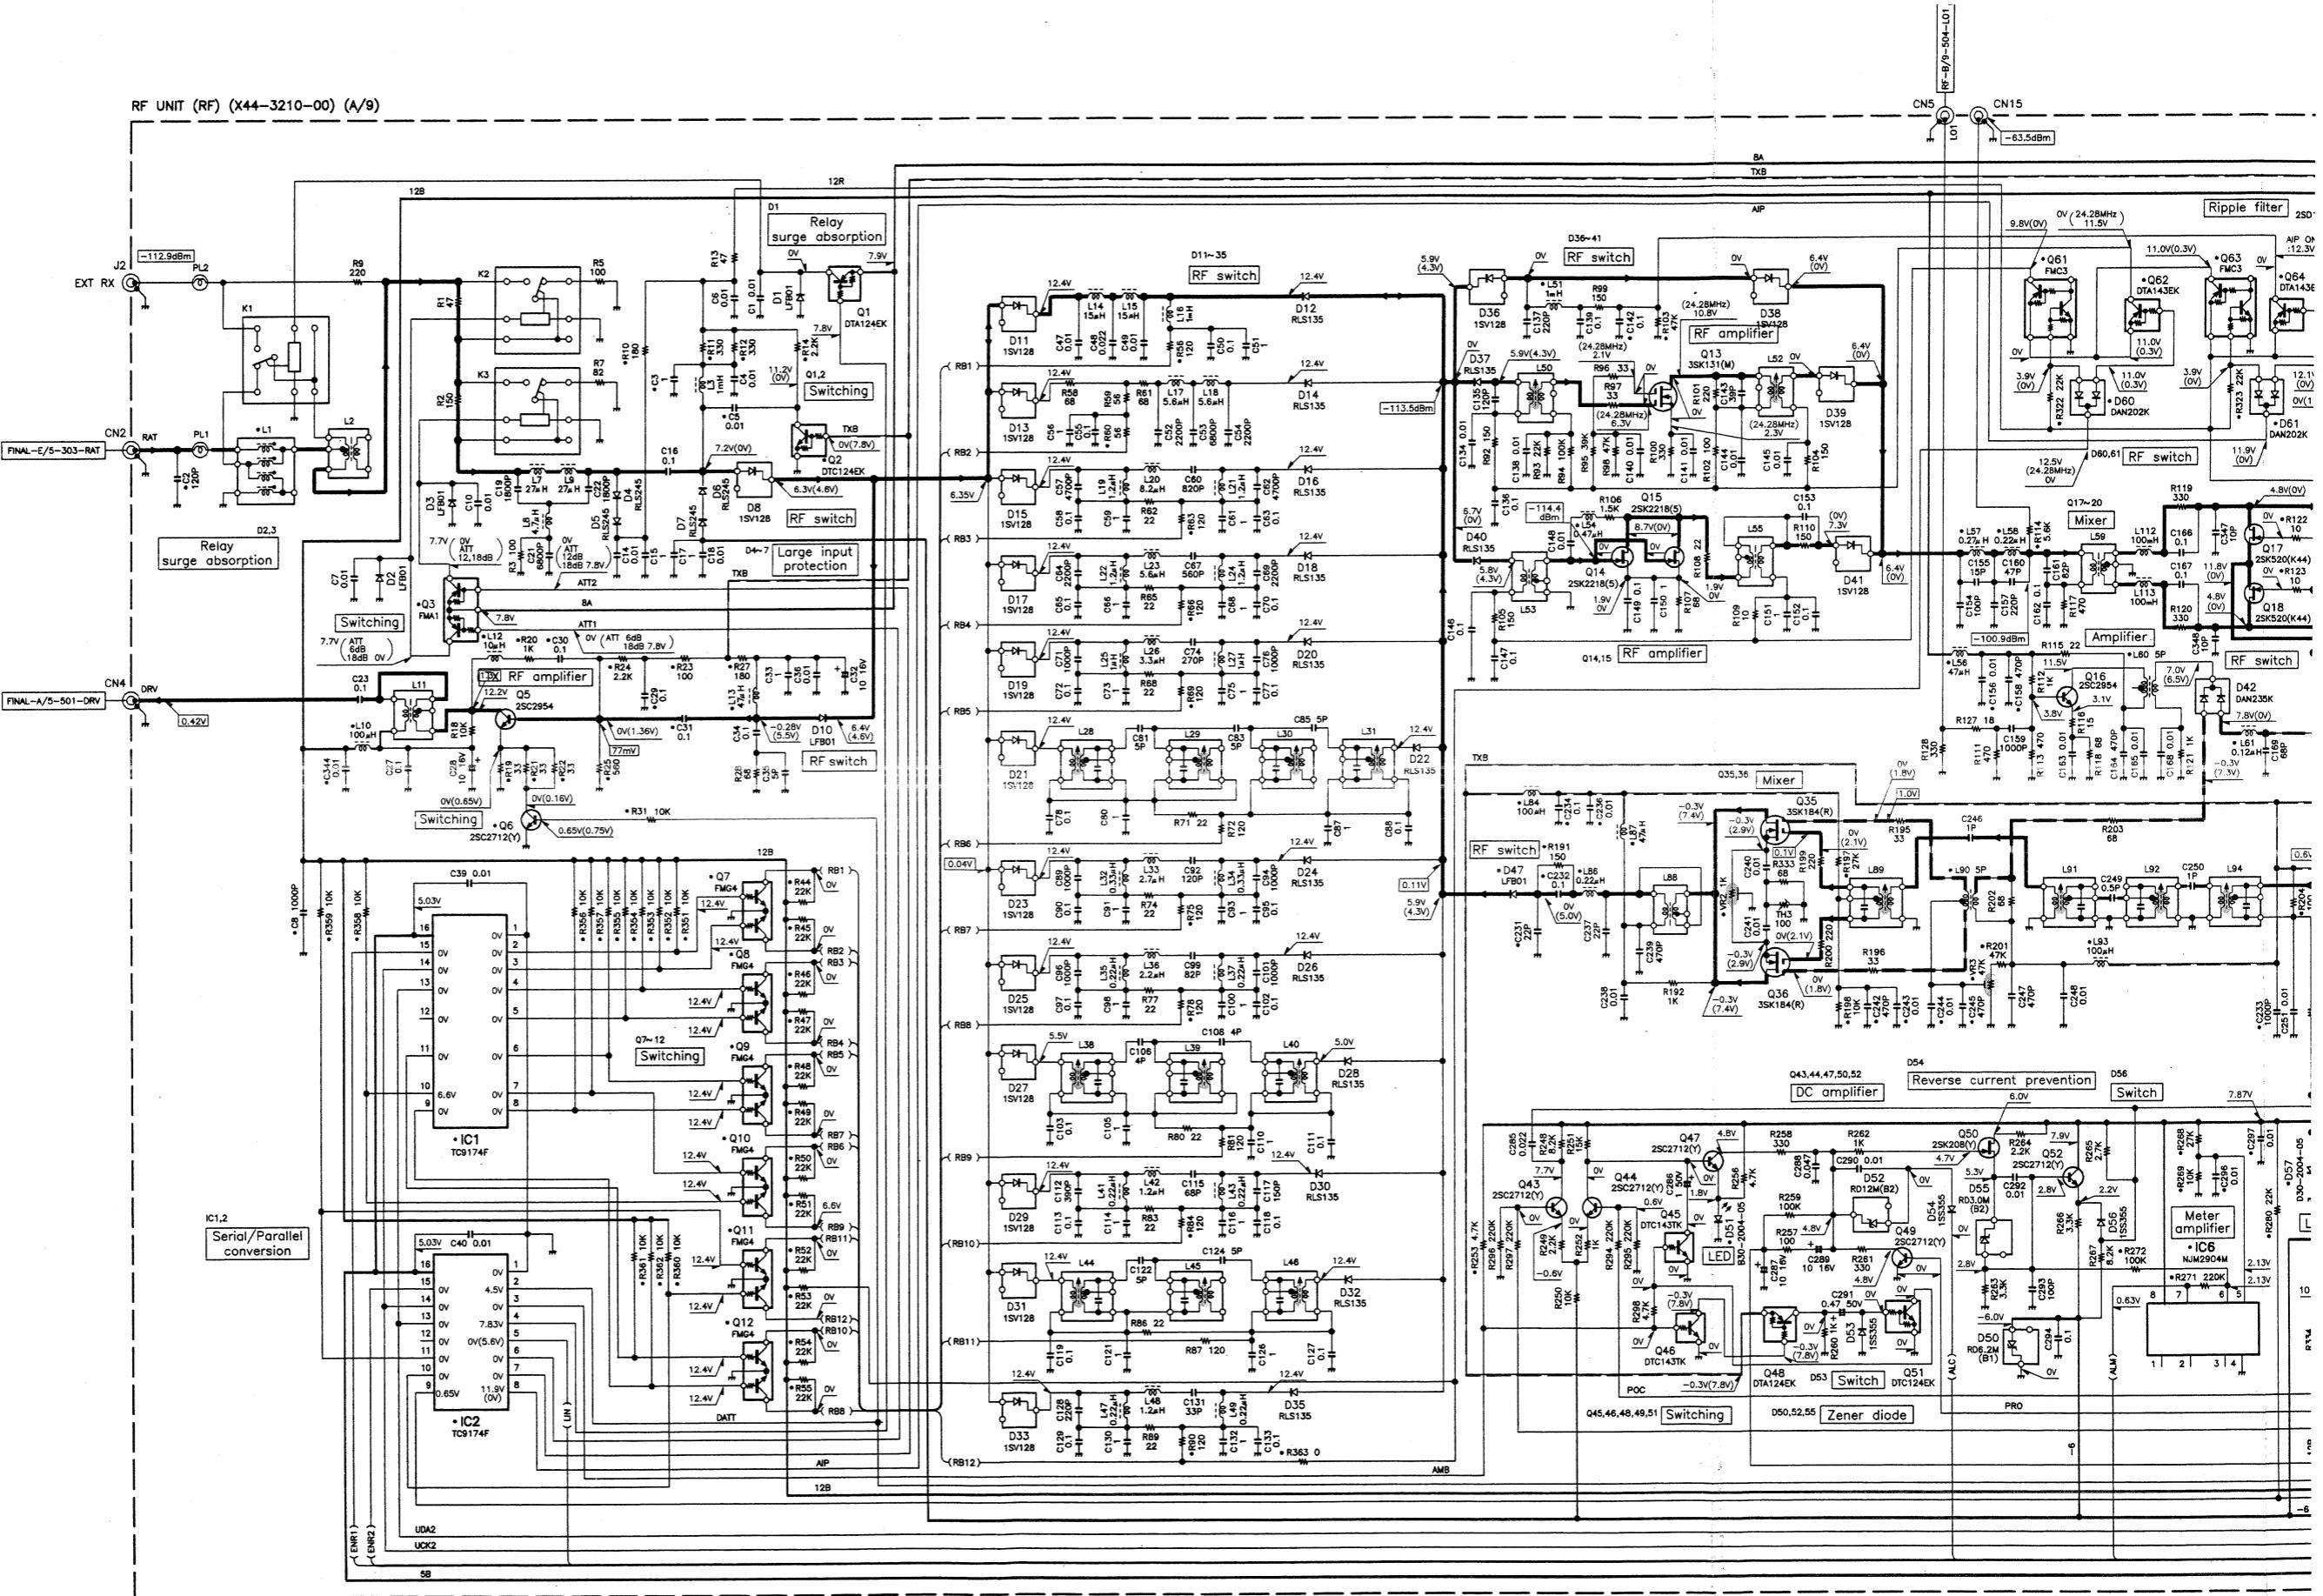

CIRCUIT DIAGRAM TS-870S

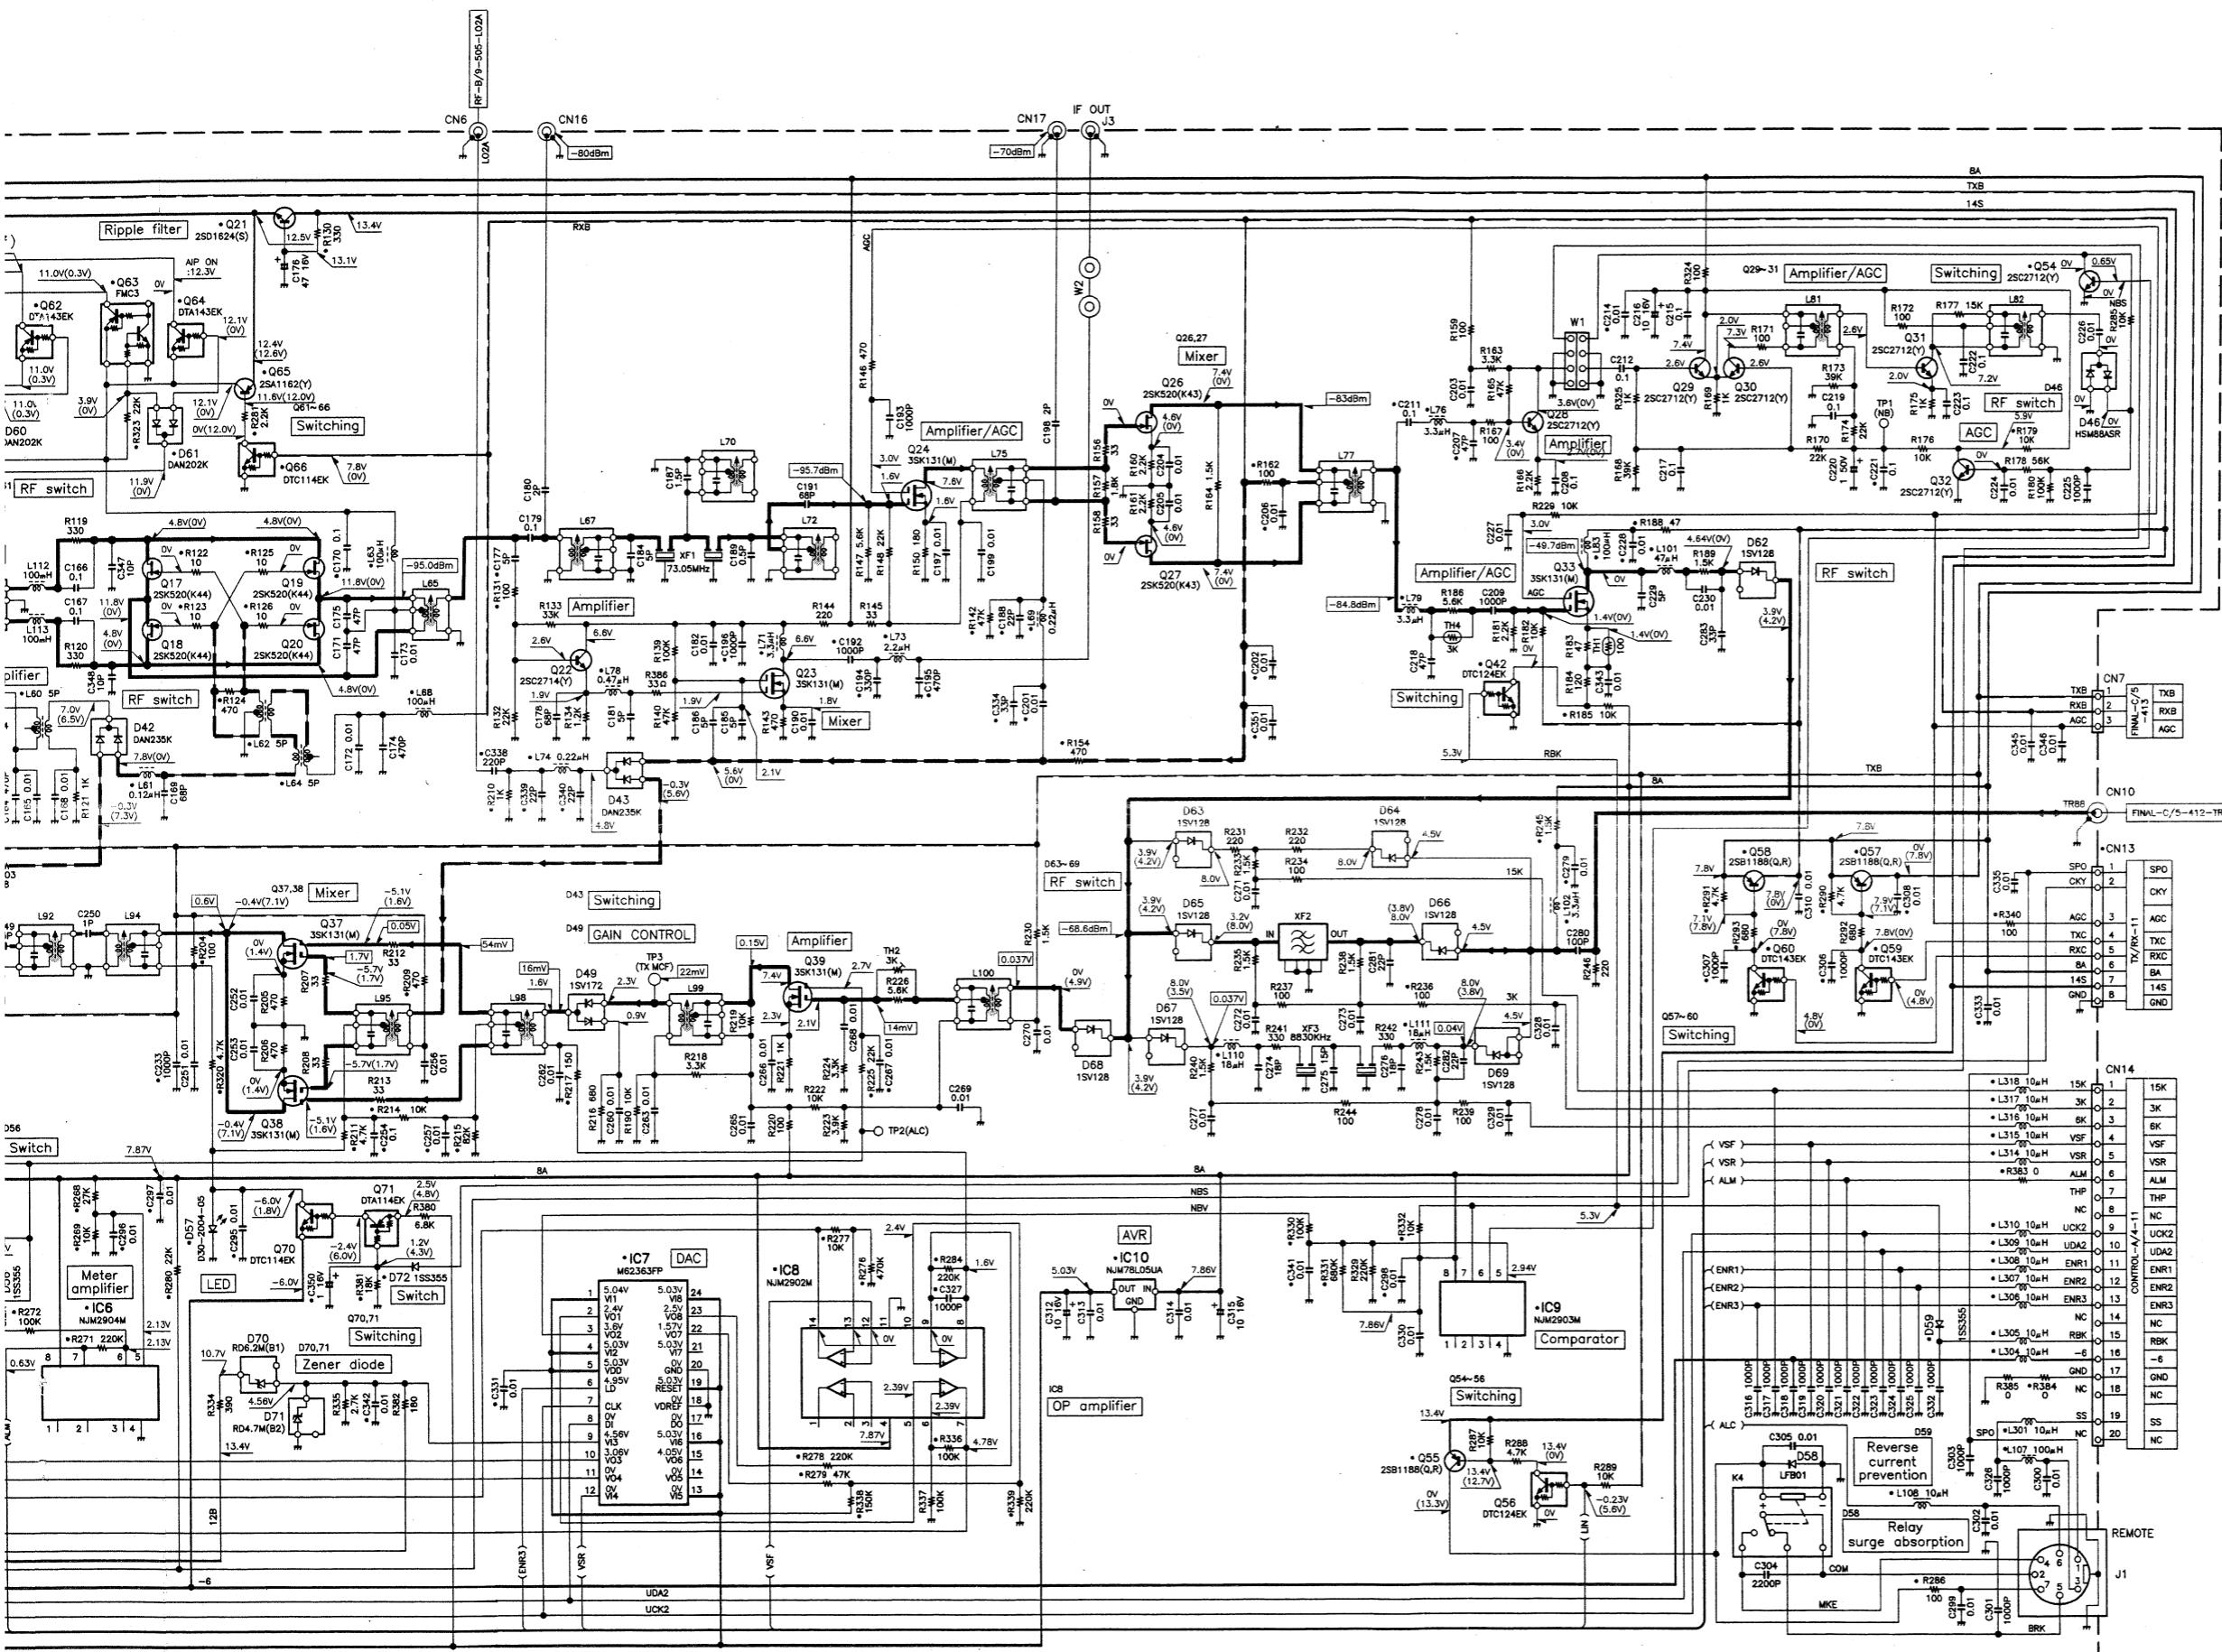

TS-870S CIRCUIT DIAGRAM

RF UNIT (X44-3210-00) (B/9) : PLL

RF UNIT (PLL) (X44-3210-00) (B/9)


DTA124EK 2SC2996
DTC114EK 2SC3722K
2SC2712 2SD1757K
2SC2714




2SK508NW



SN16913P



MB86001PF
UPD74HC390G




2SC2954





TA78DS09F
TA78L09F




SN76514N




F71022

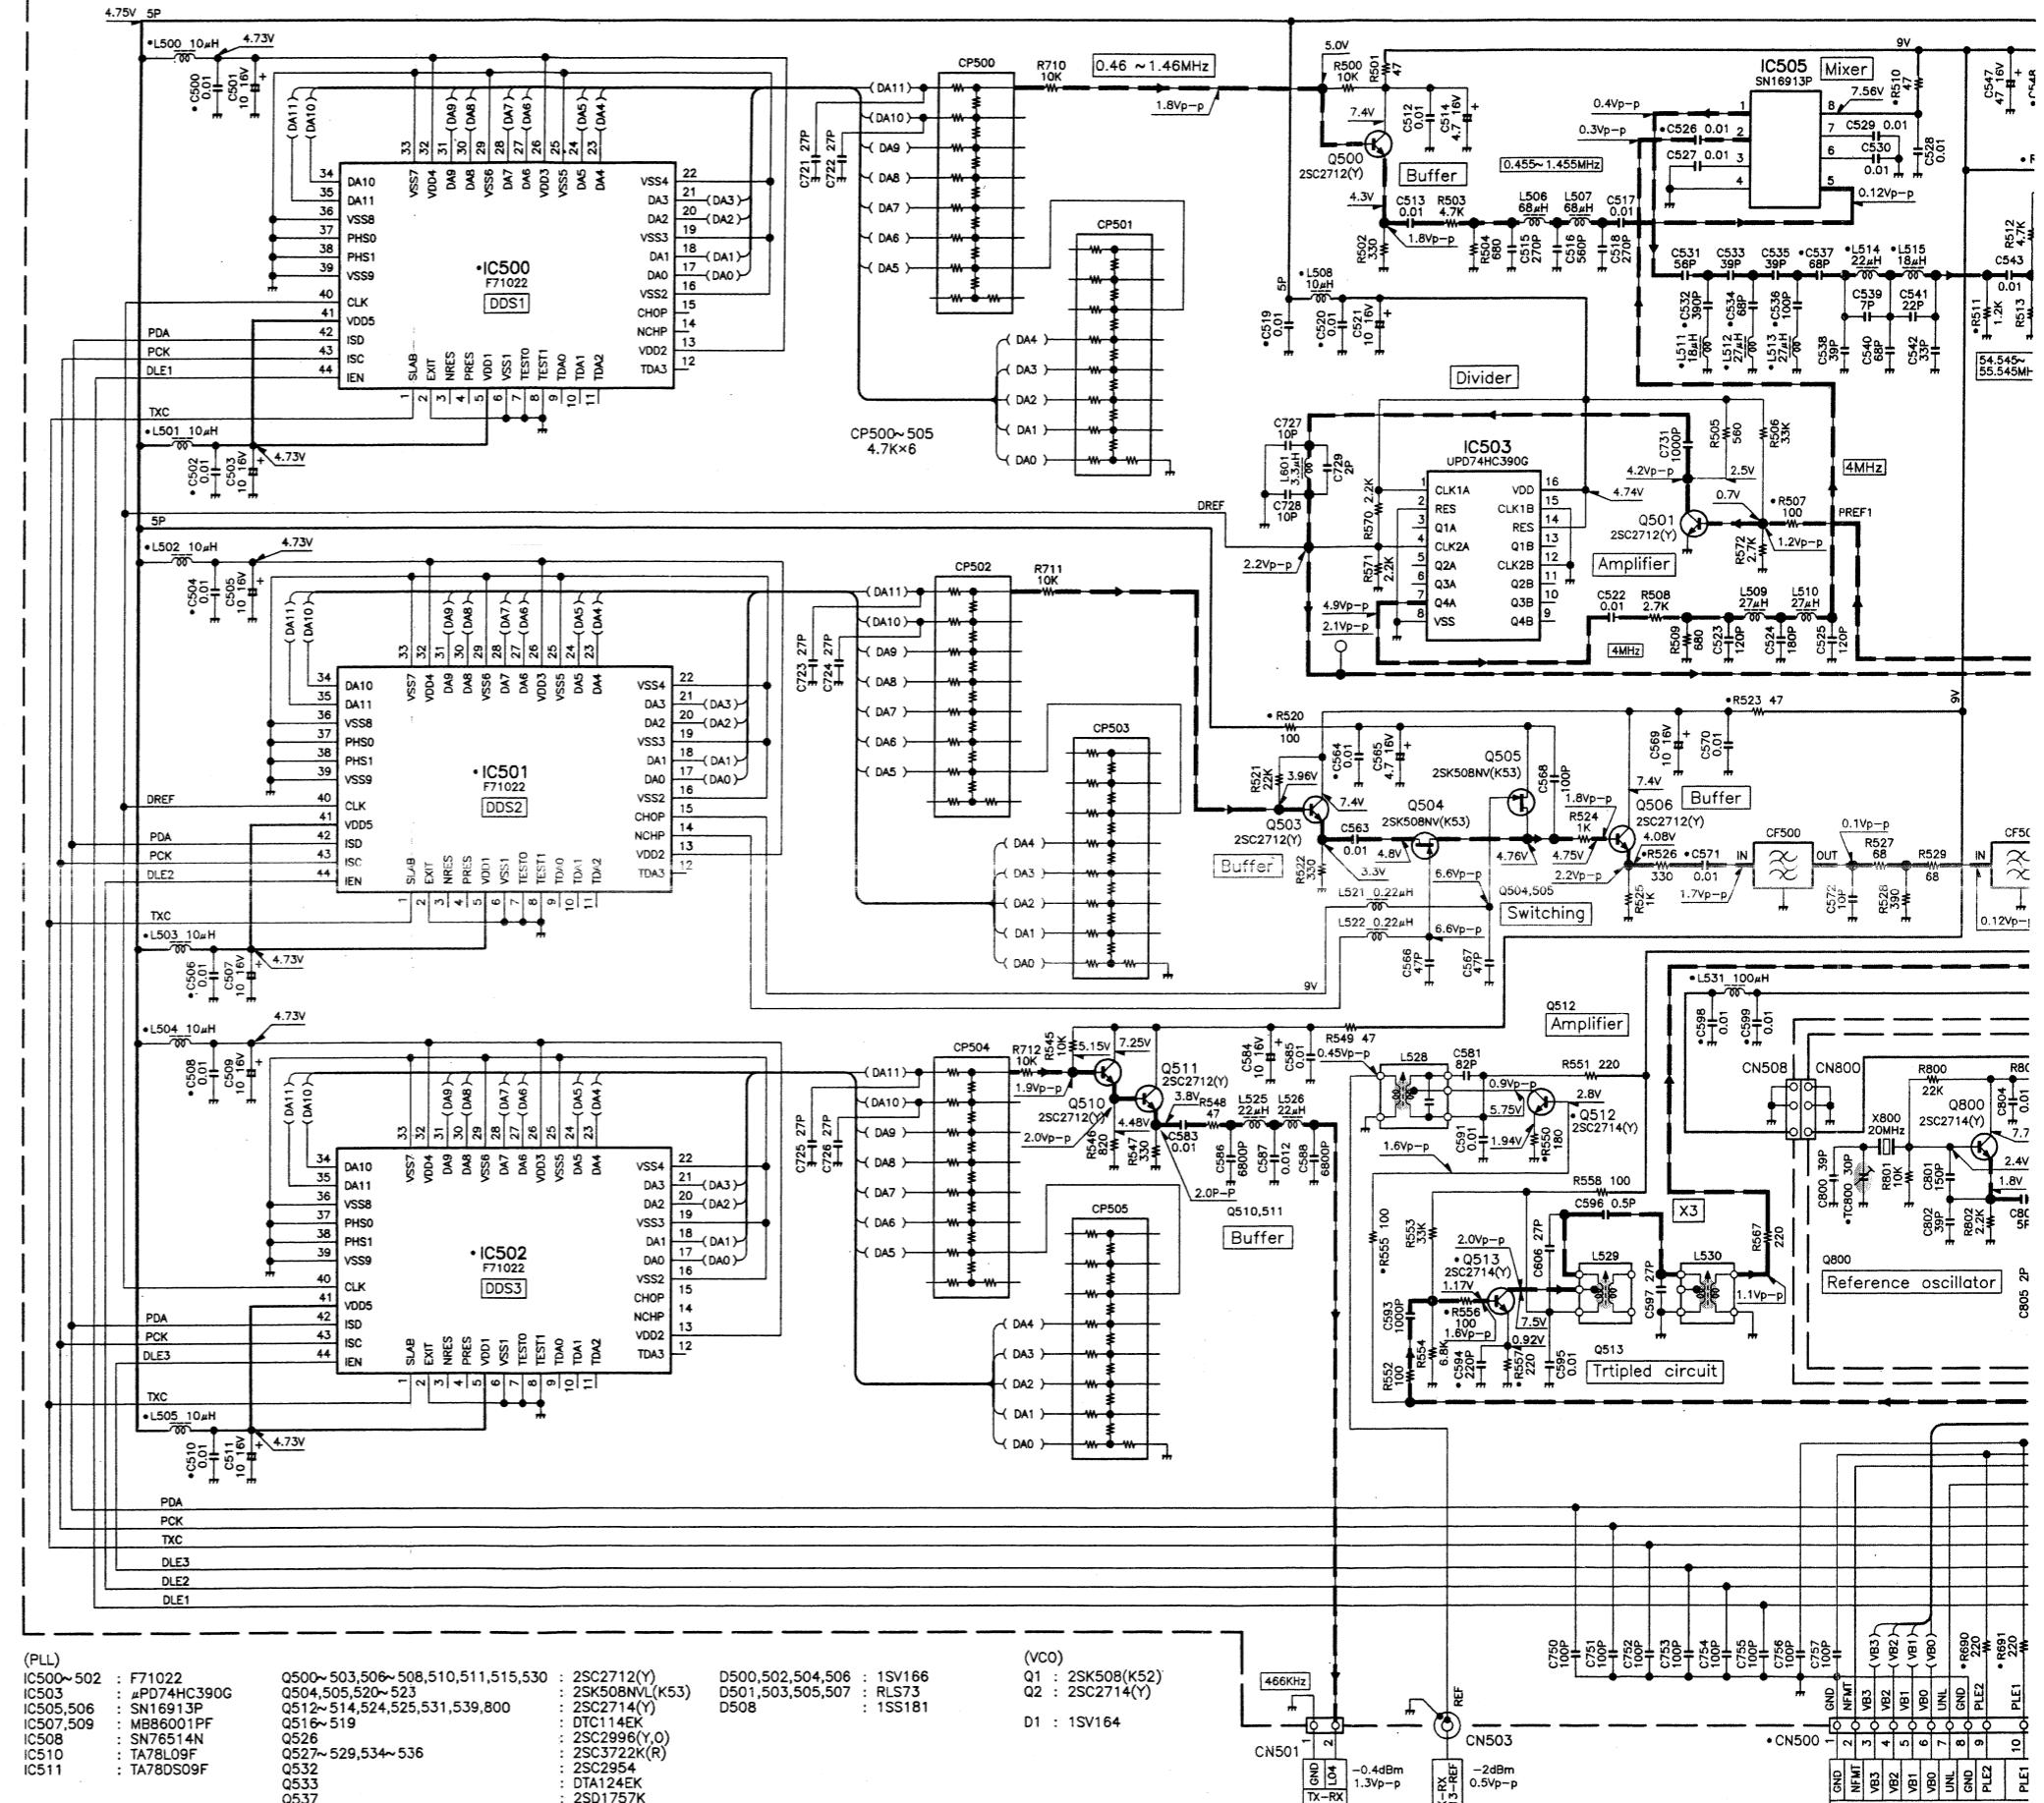

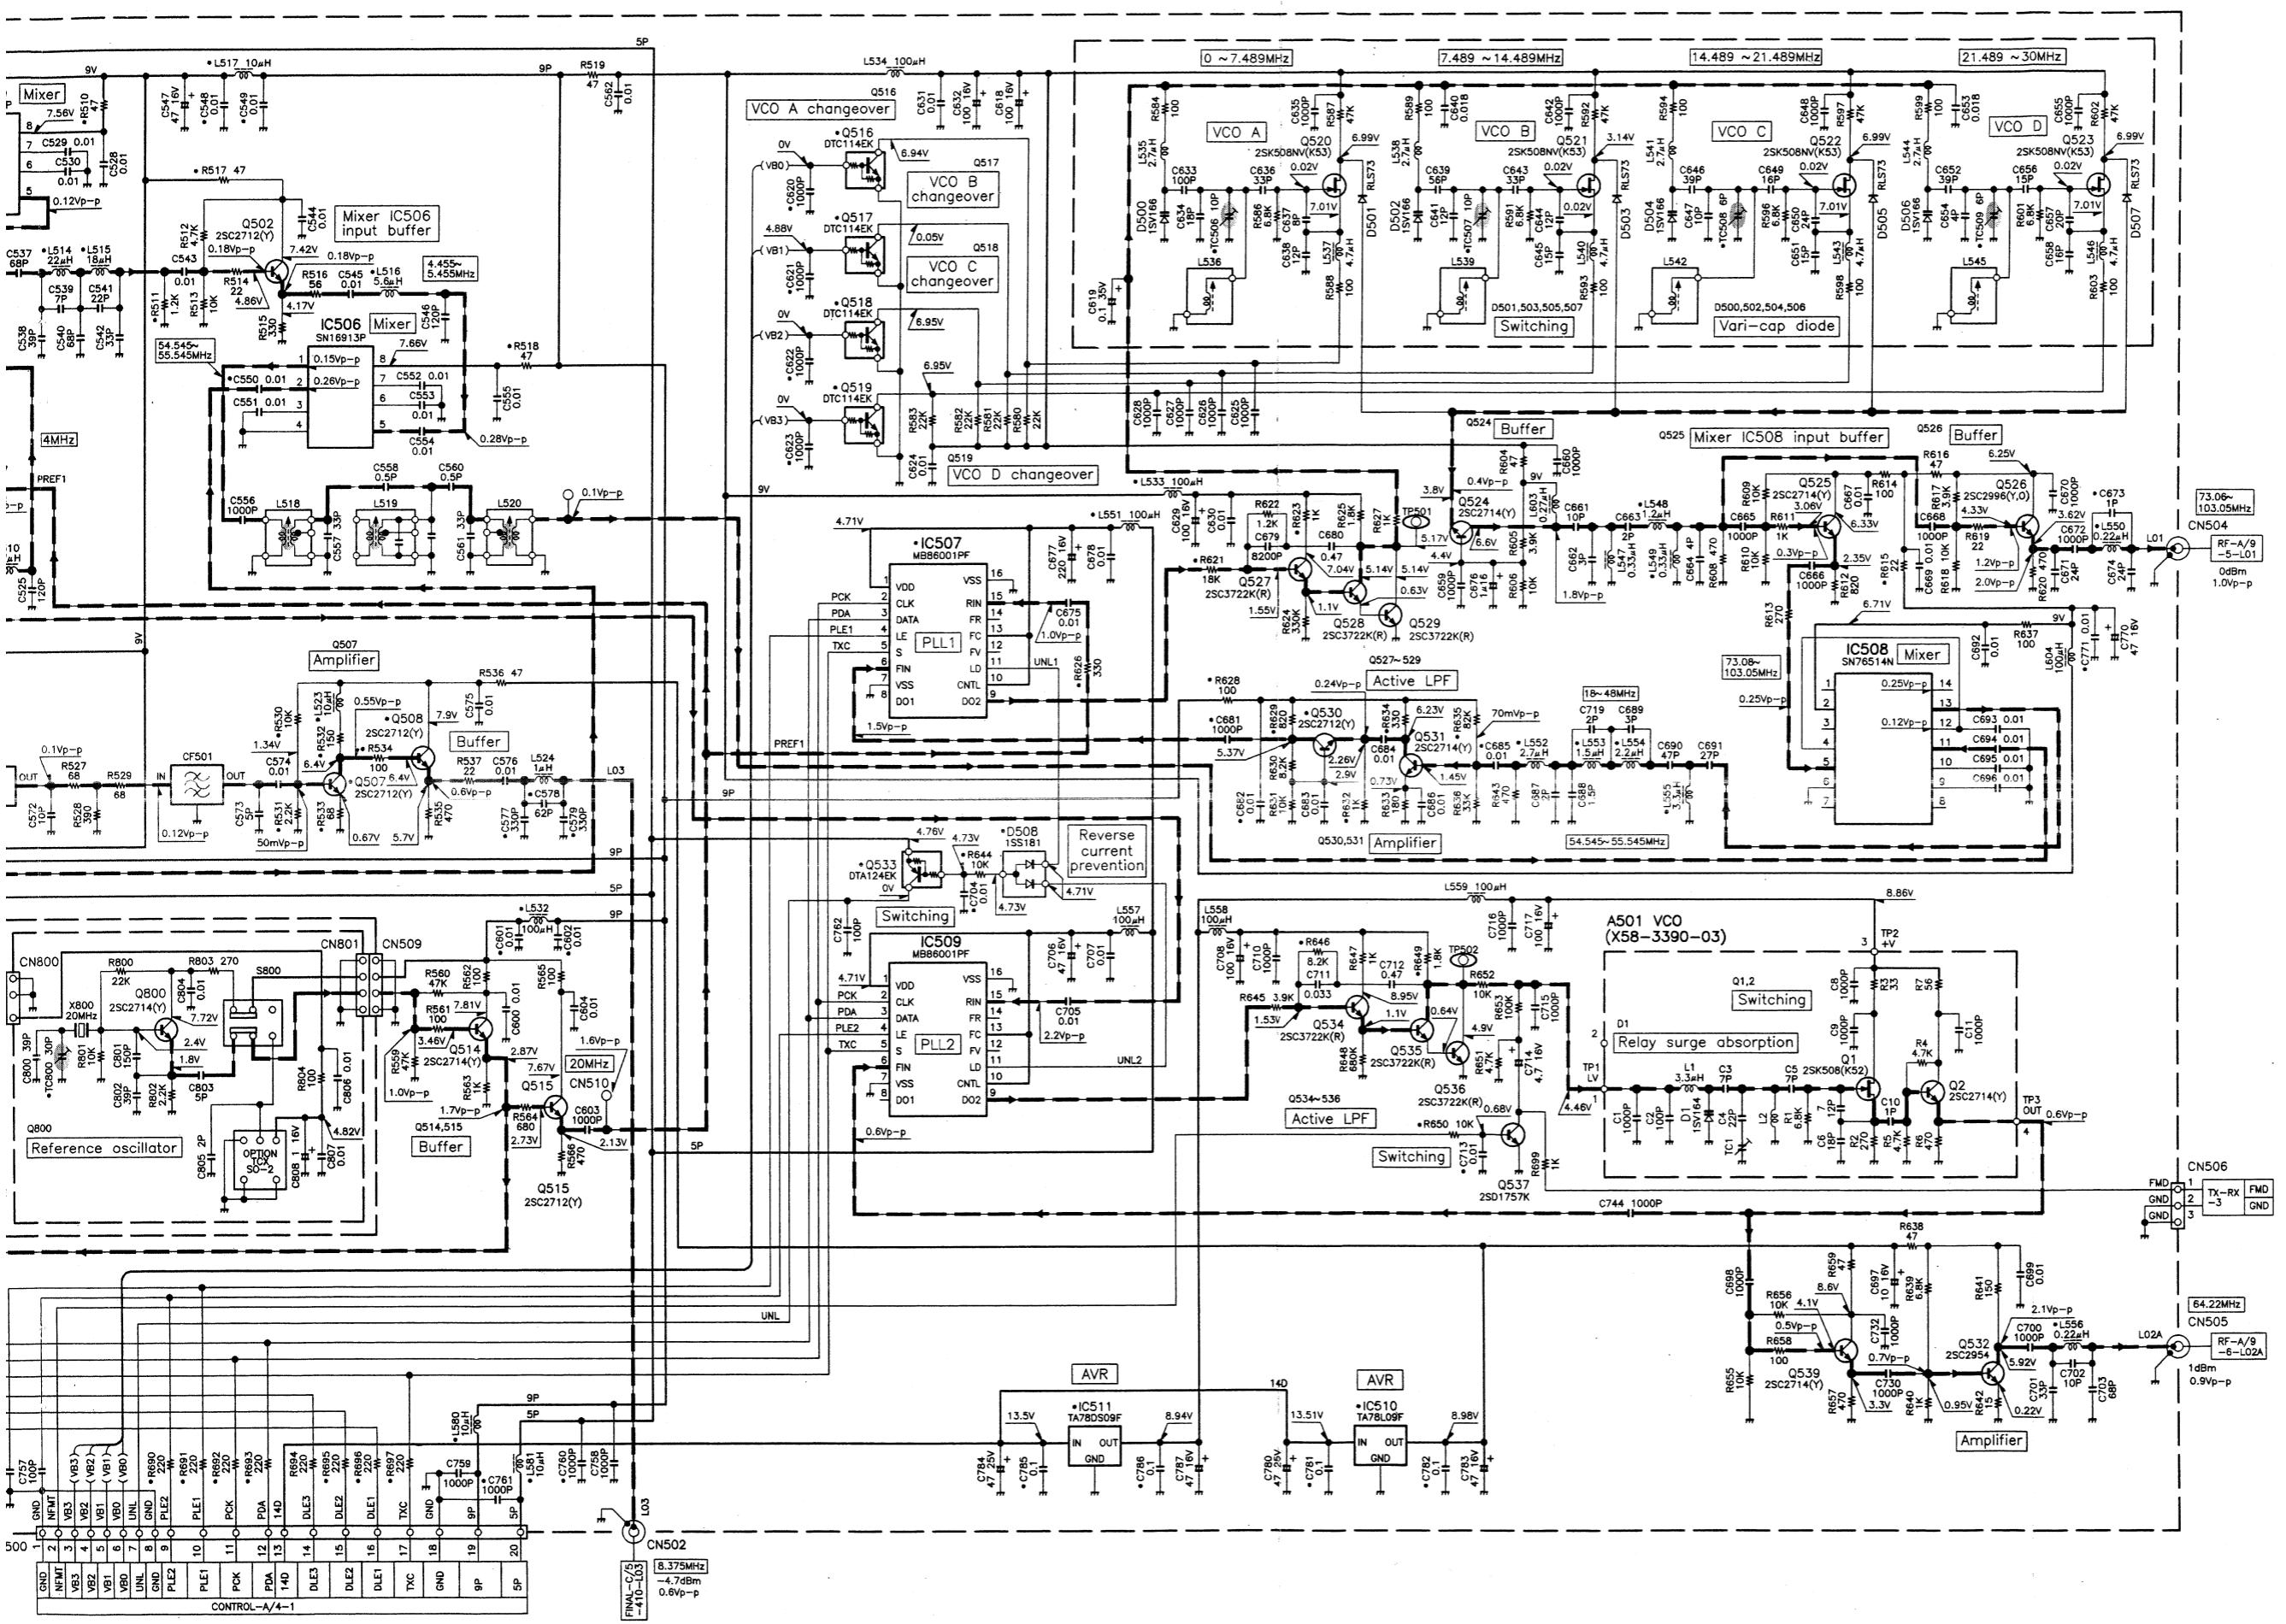

FINAL UNIT (X45-351X-XX) (A,B,D,E/5) 0-00 : K,P,M,M2,X 2-71 : E,E2,E3,E9

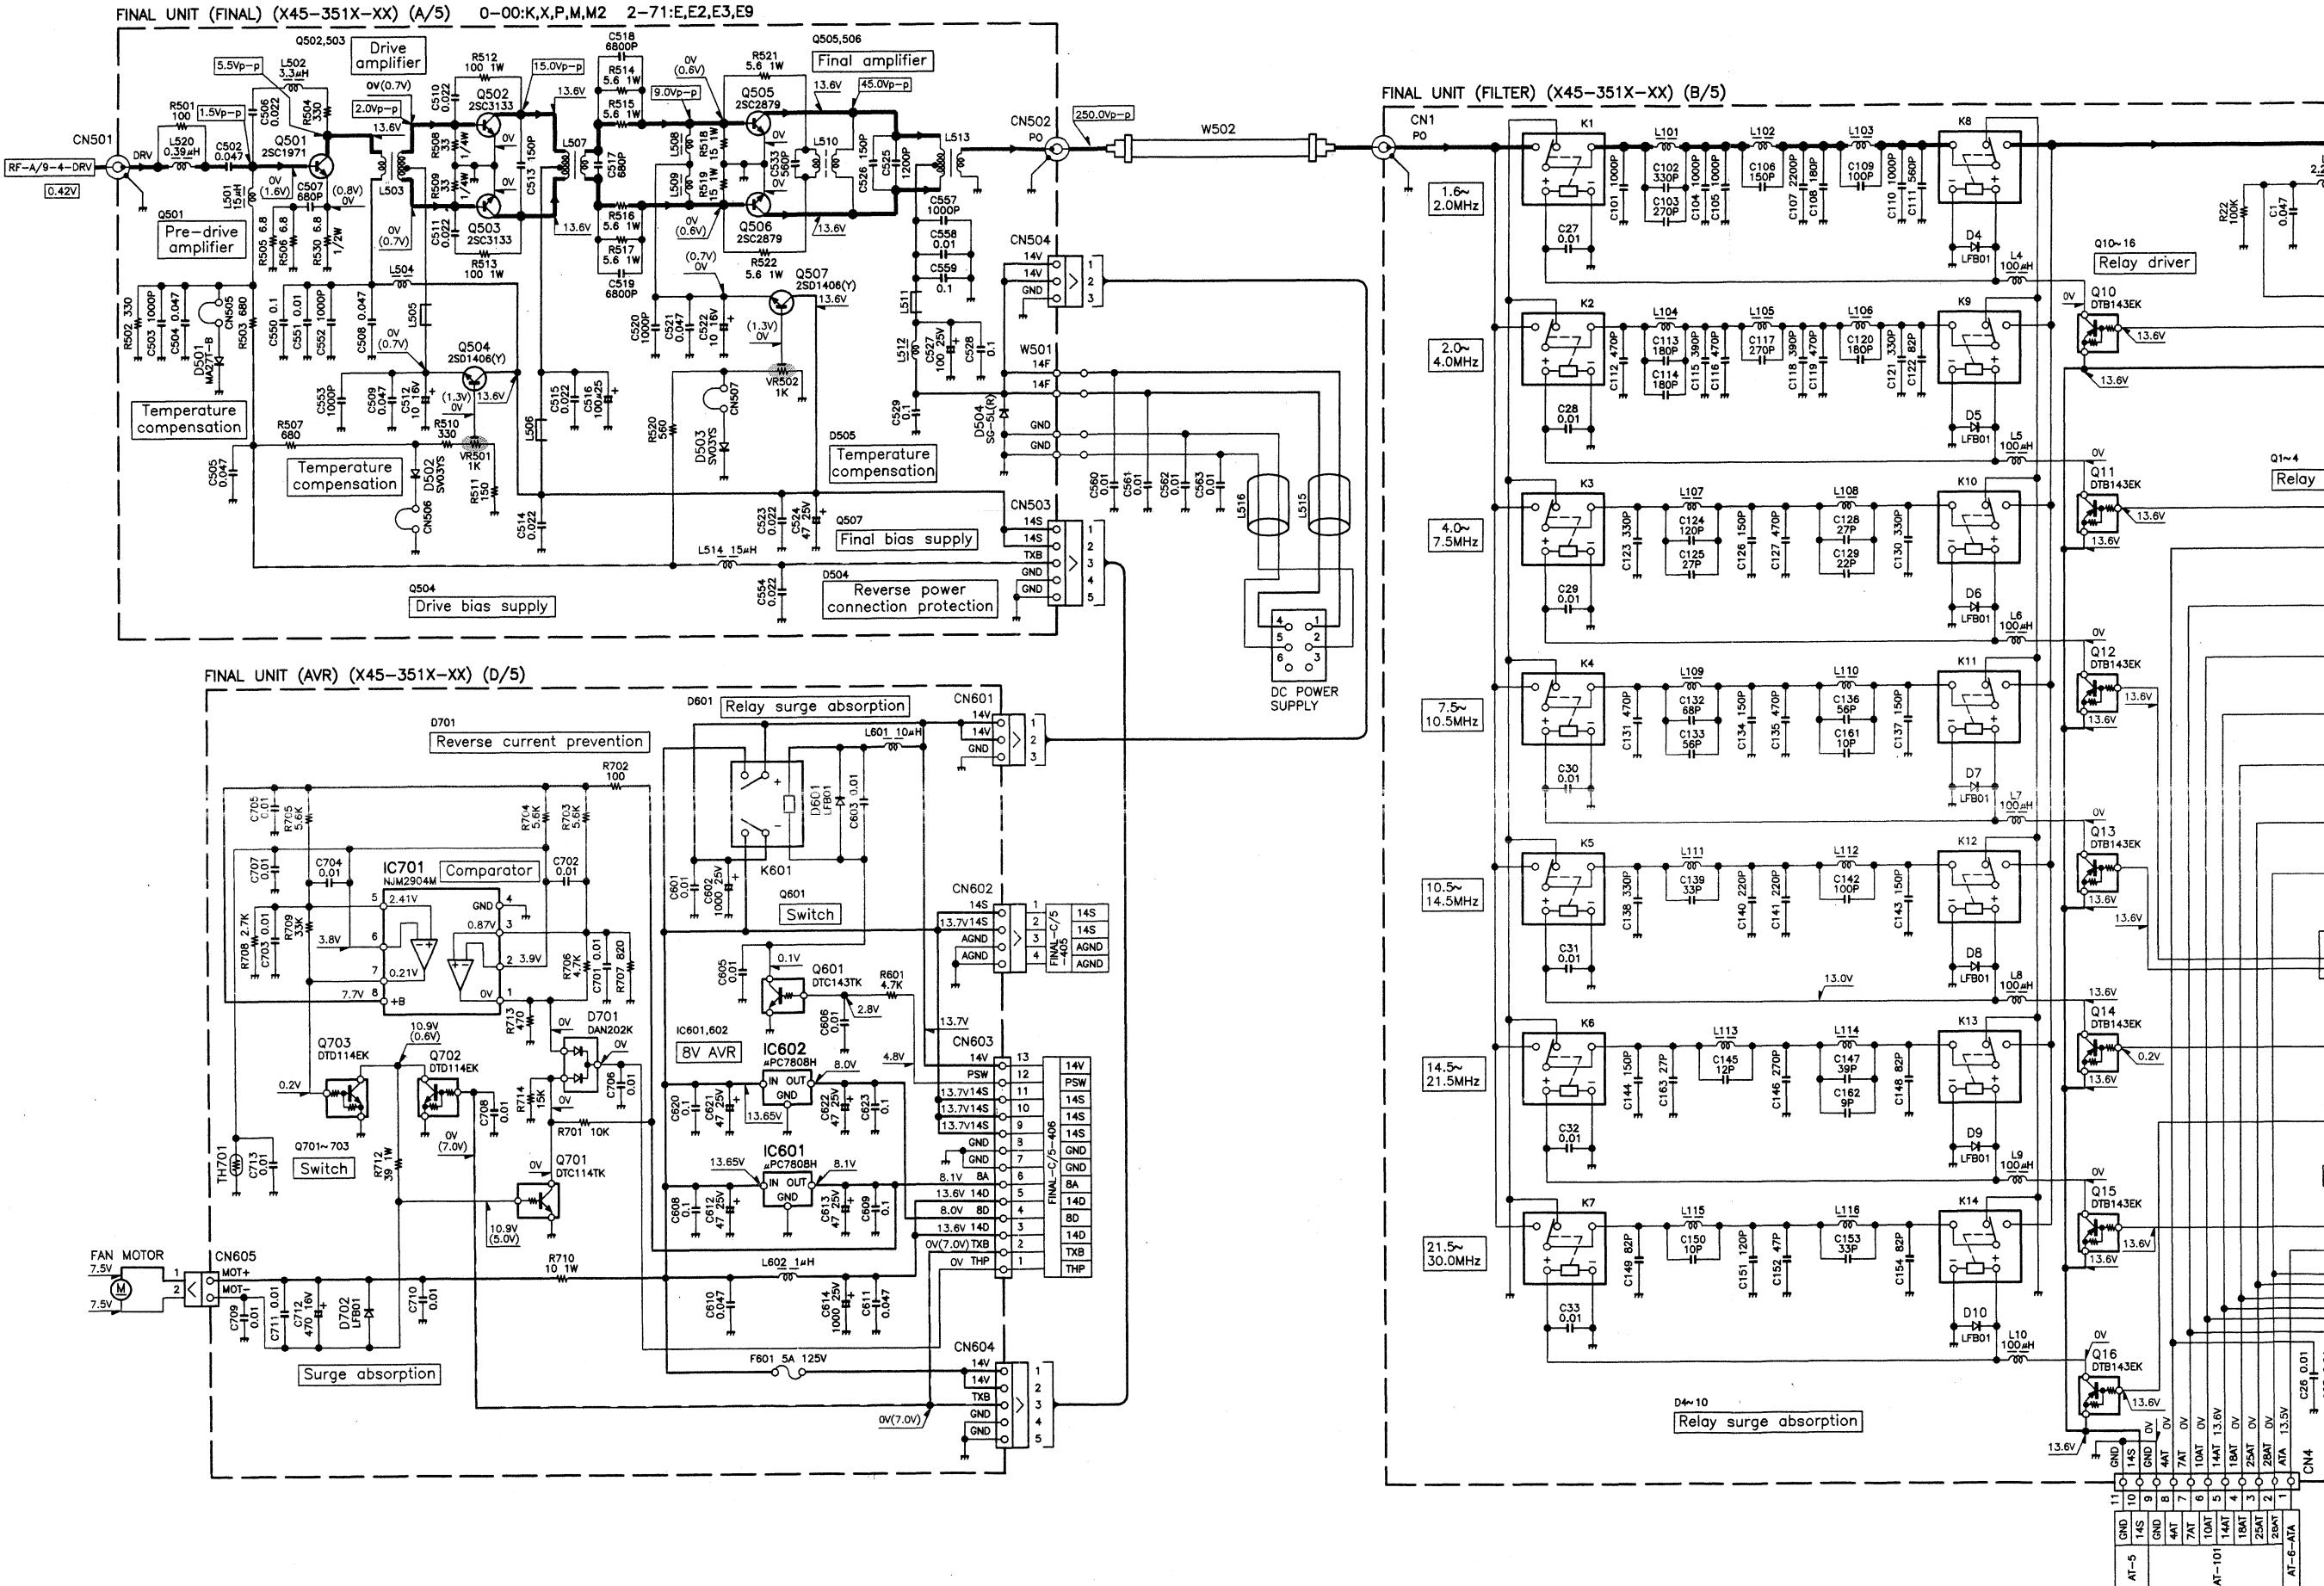

A

B

C

D


E

F

PC BOARD VIEWS TS-870S


RF UNIT (X44-3210-00) (C/9)

Component side view

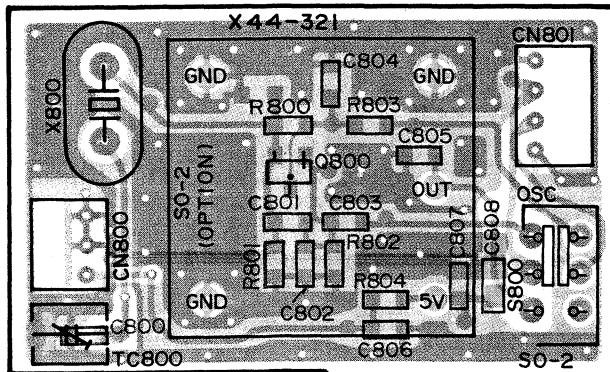

RF UNIT (X44-3210-00) (C/9)


Foil side view

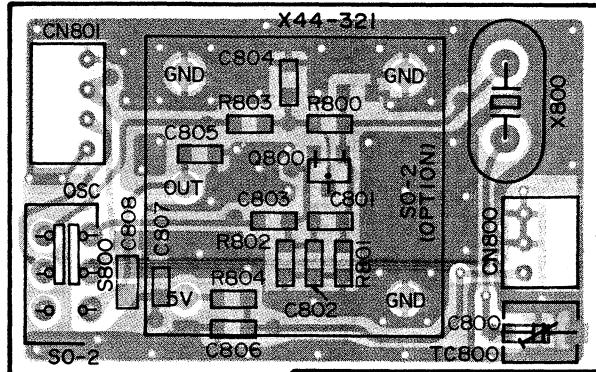

■ Component side
■ Foil side


VCO2 (X58-3390-03)

Component side view

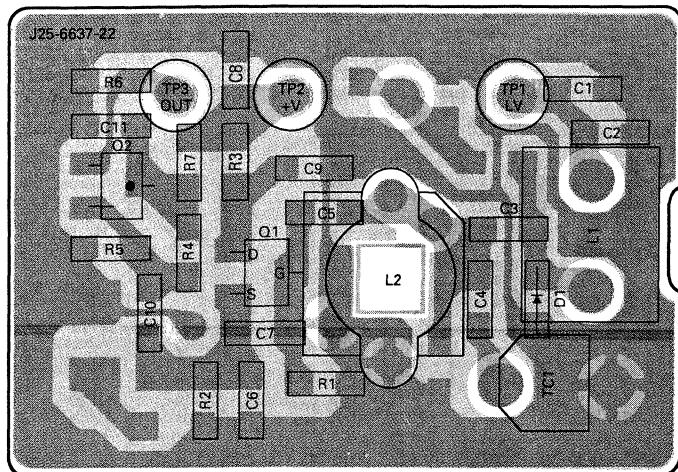

VCO2 (X58-3390-03)


Foil side view

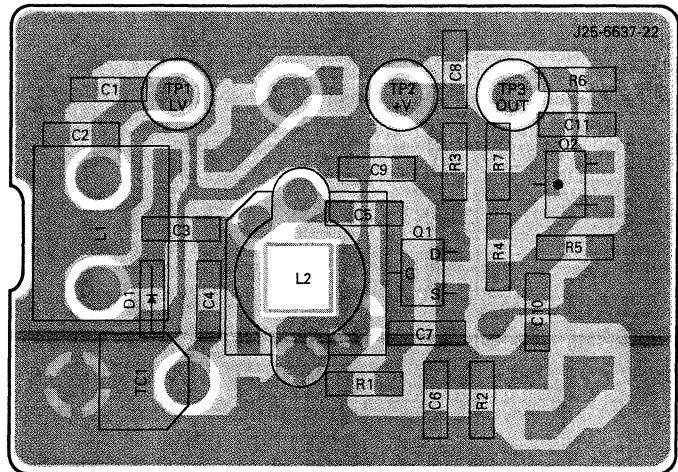

TS-870S PC BOARD VIEW

FINAL UNIT (X45-351X-XX) (A/5) : FINAL
Component side view

0-00 : K,P,M,M2,X
2-71 : E,E2,E3,E9

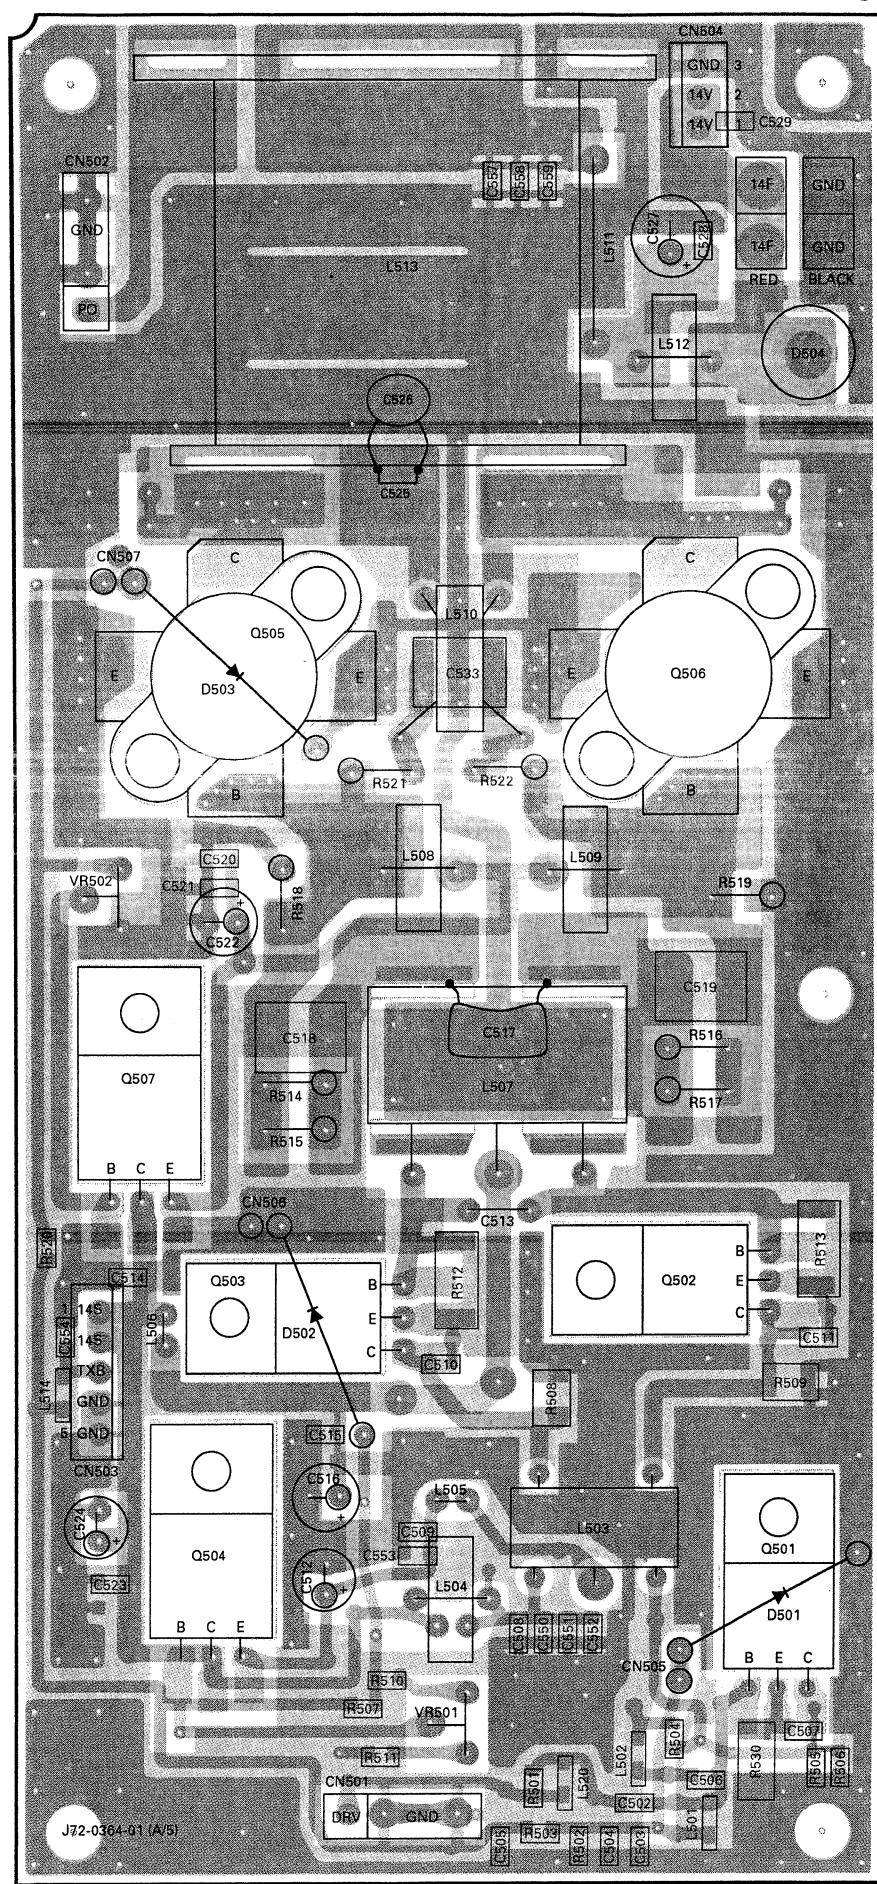

■ Component side
■ Foil side

A

B

C

D

E

F

FINAL UNIT (X45-351X-XX) (A/5) : FINAL


Foil side view

0-00 : K,P,M,M2,X

2-71 : E,E2,E3,E9

PC BOARD VIEW

TS-870S

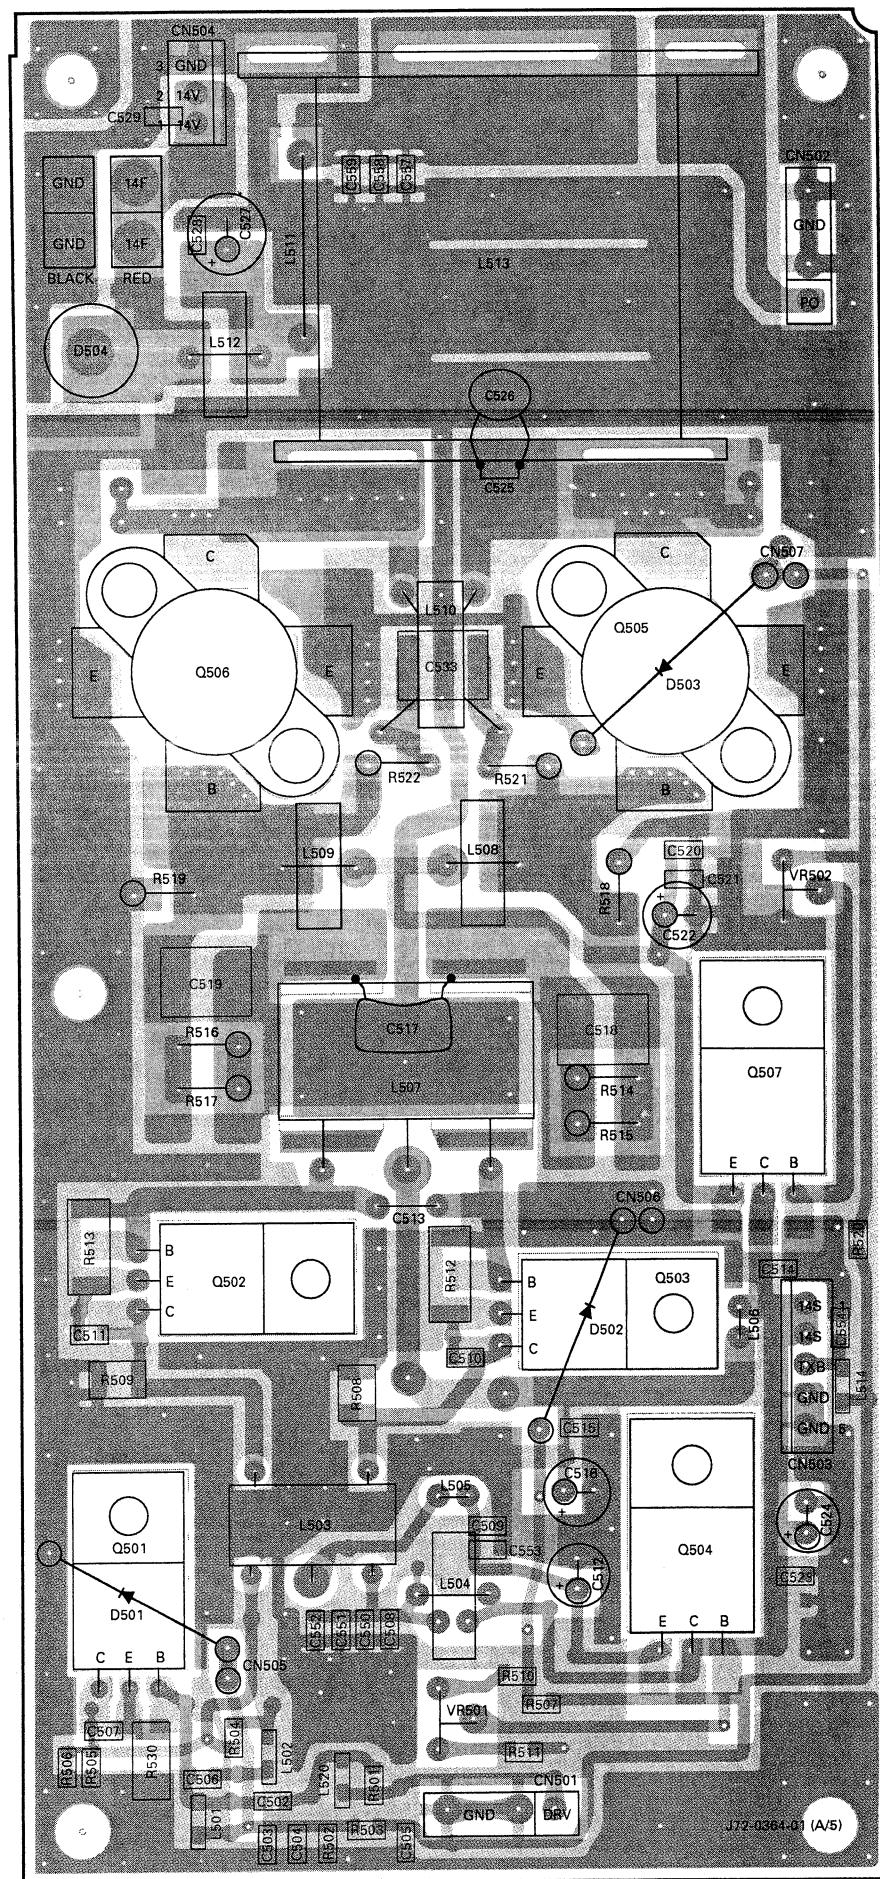

A

B

C

D

E


F

TS-870S PC BOARD VIEW

FINAL UNIT (X45-351X-XX) (B/5) : FILTER

Component side view 0-00 : K,P,M,M2,X 2-71 : E,E2,E3,E9

Component side
Foil side

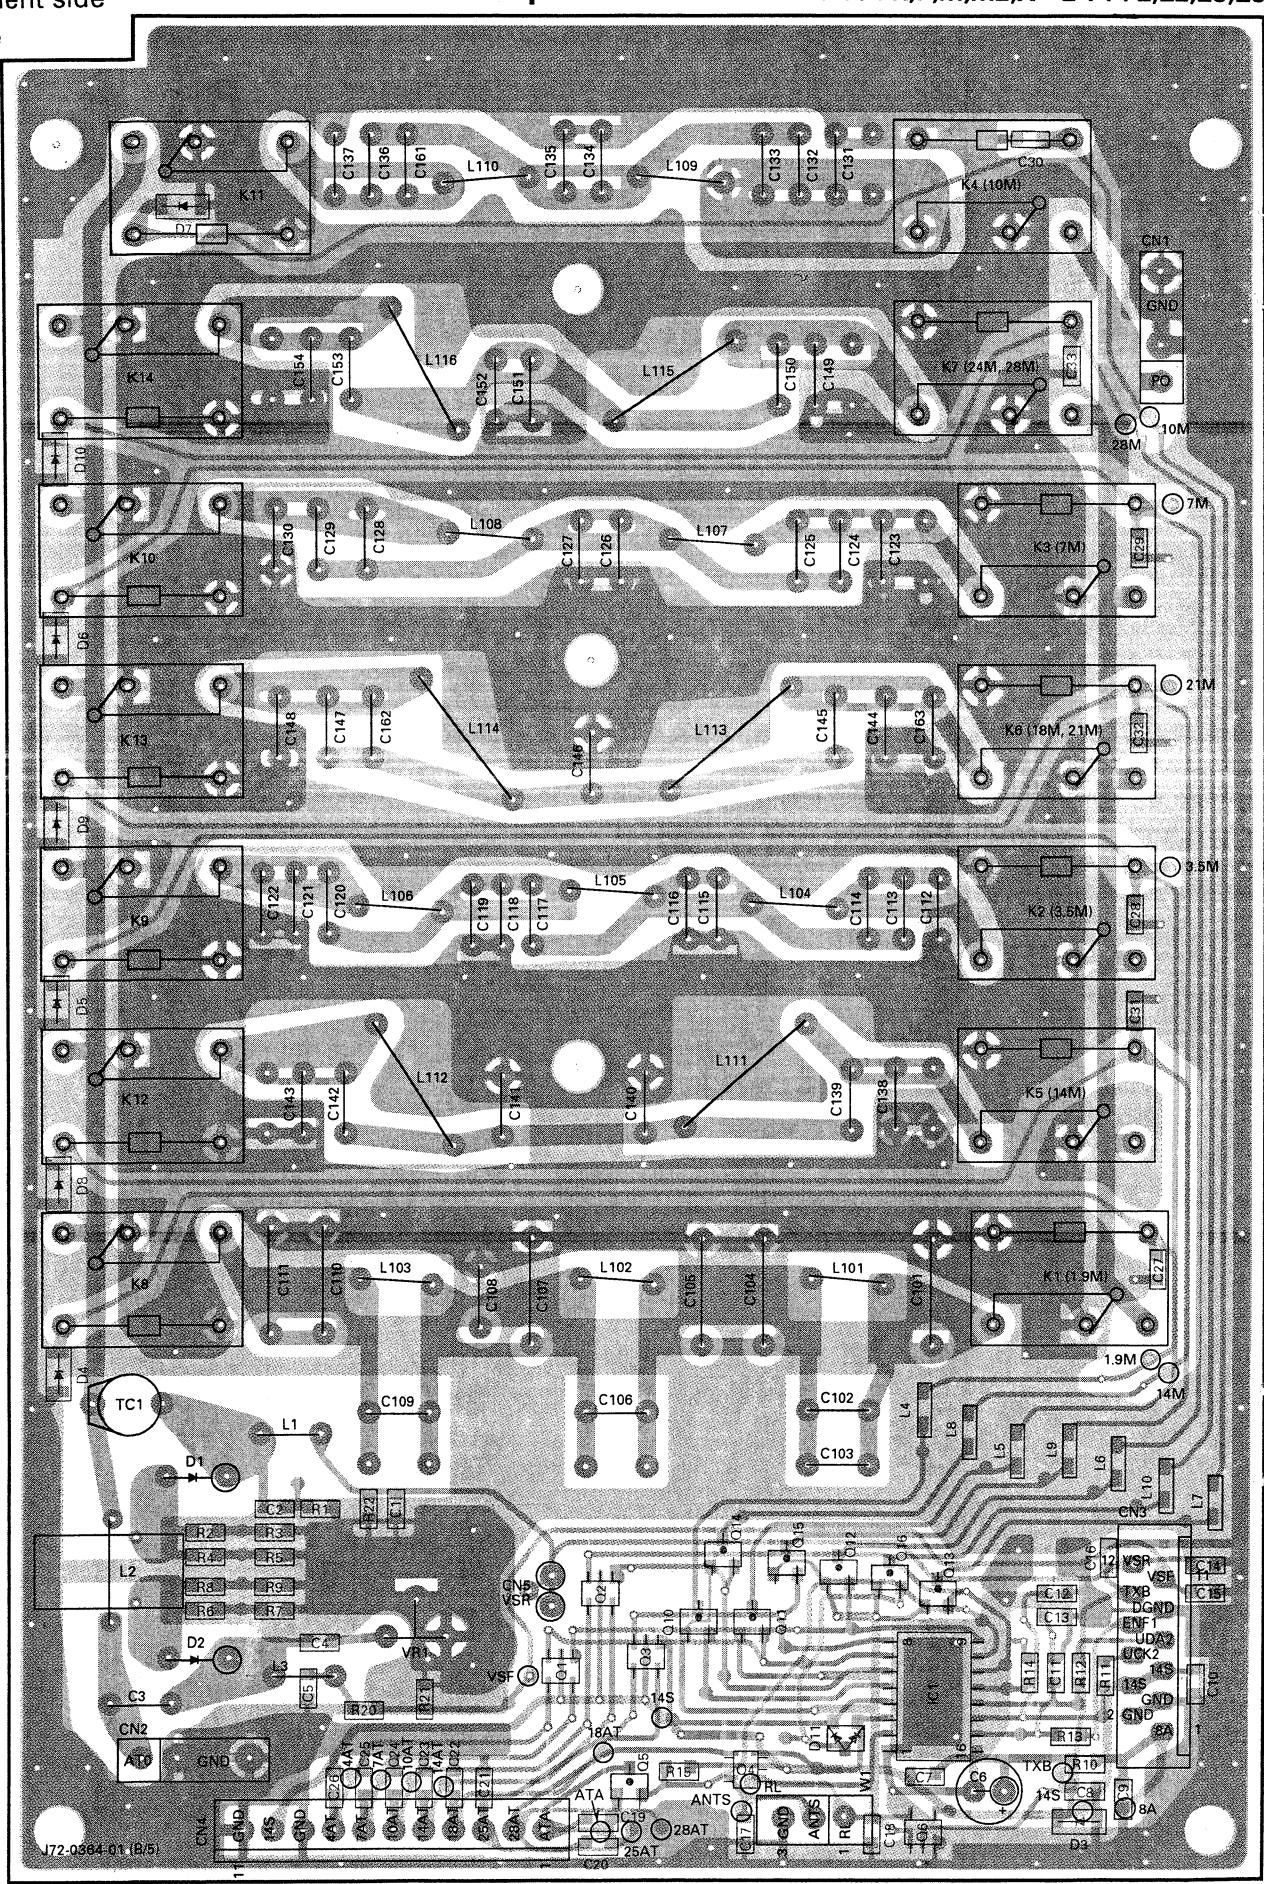

A

B

C

D

E


F

PC BOARD VIEW TS-870S

FINAL UNIT (X45-351X-XX) (B/5) : FILTER

Foil side view 0-00 : K,P,M,M2,X 2-71 : E,E2,E3,E9

Component side
Foil side

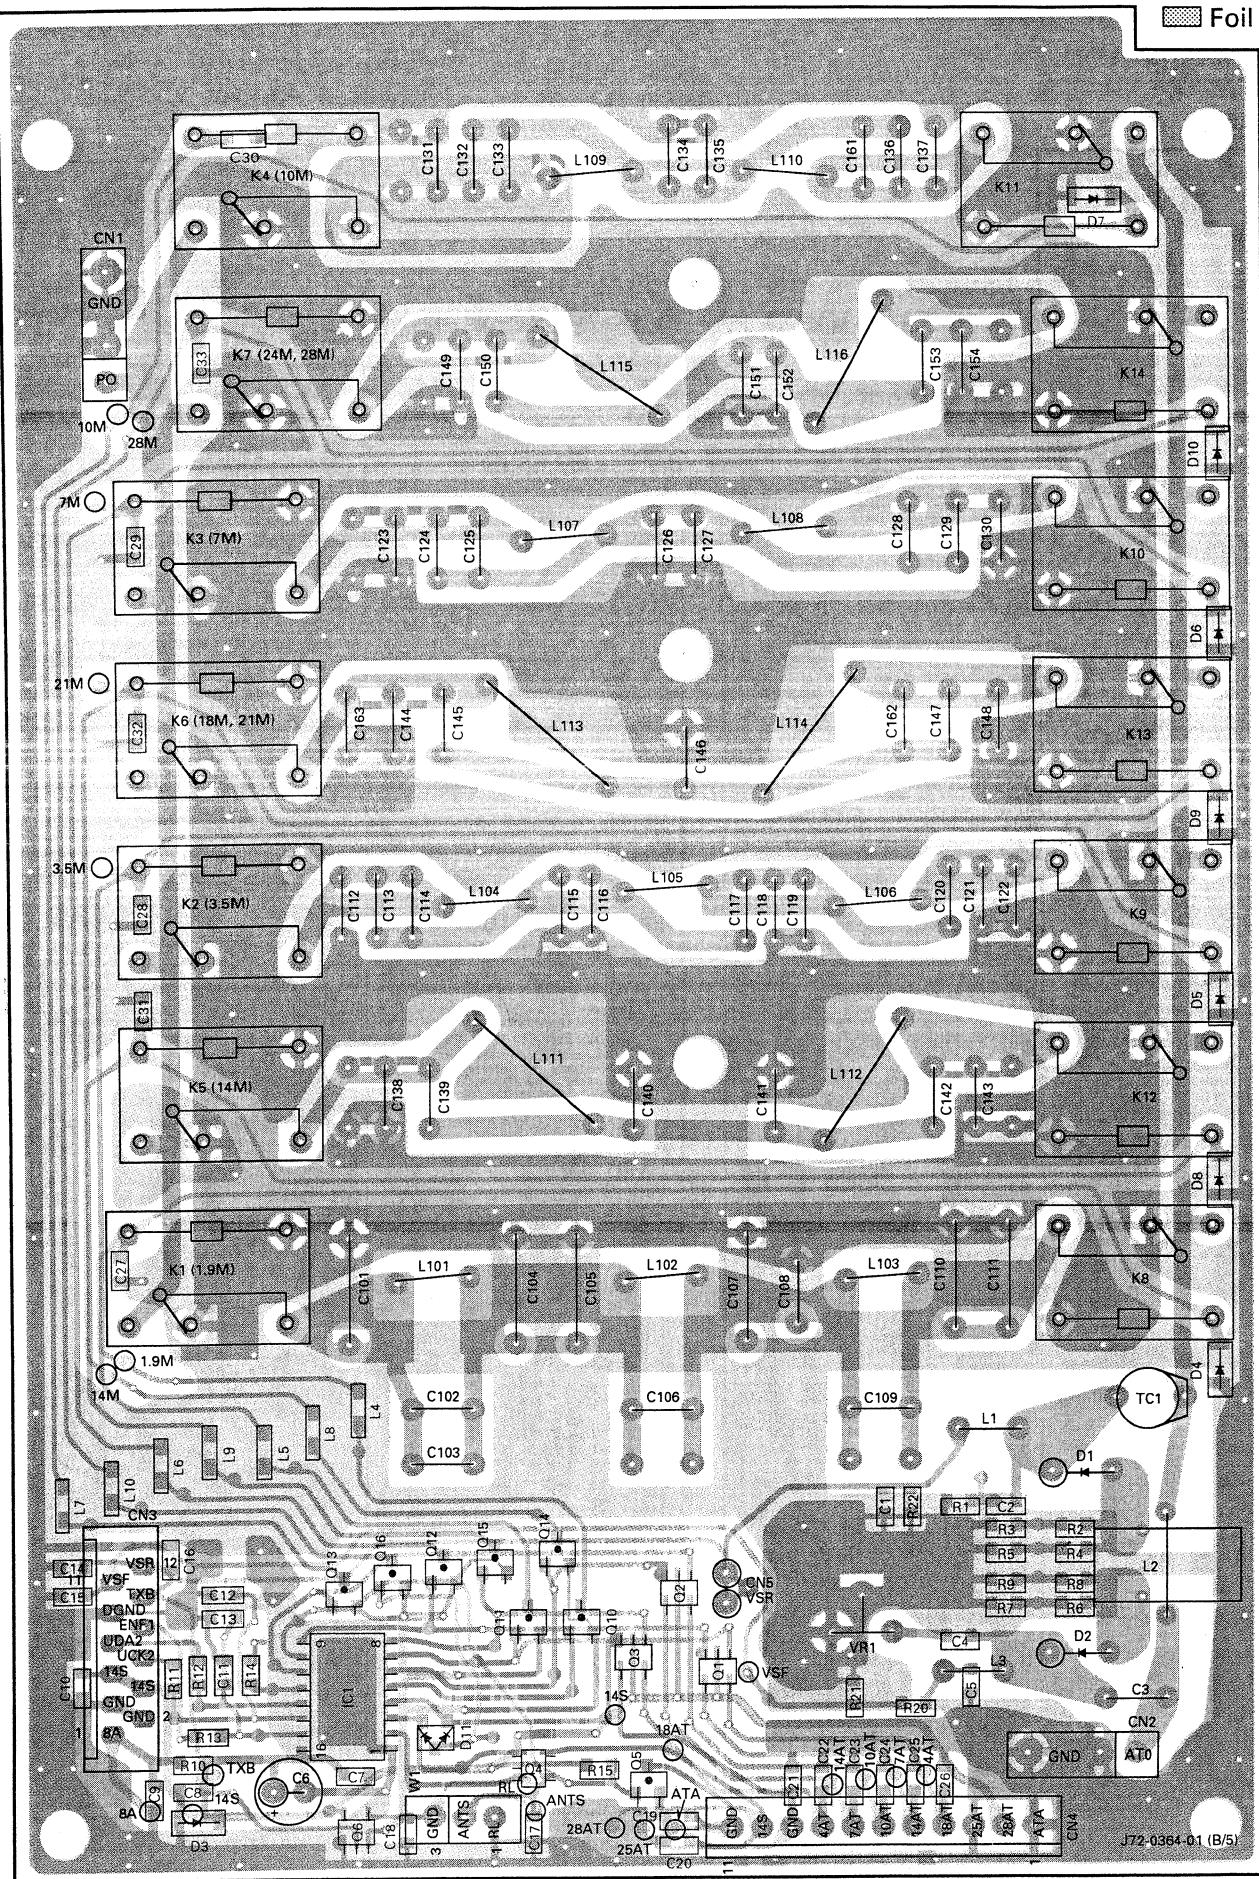

TS-870S PC BOARD VIEWS

A

B

C

D

E

F


FINAL UNIT

(X45-351X-XX) (D/5) : AVR

Component side view

0-00 : K,P,M,M2,X

2-71 : E,E2,E3,E9

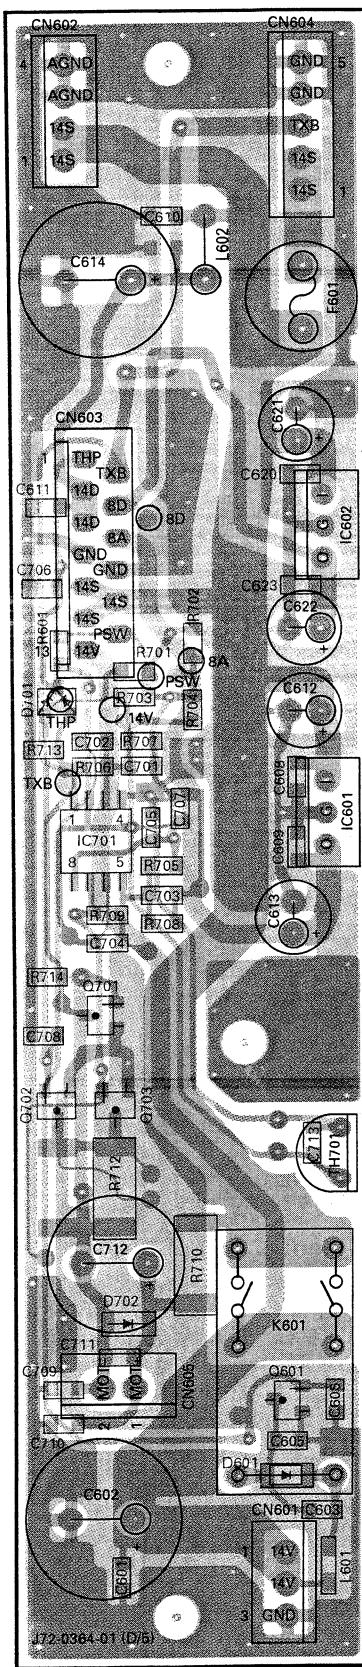


FINAL UNIT (X45-351X-XX) (E/5) : RELAY

Component side view

0-00 : K,P,M,M2,X

2-71 : E,E2,E3,E9

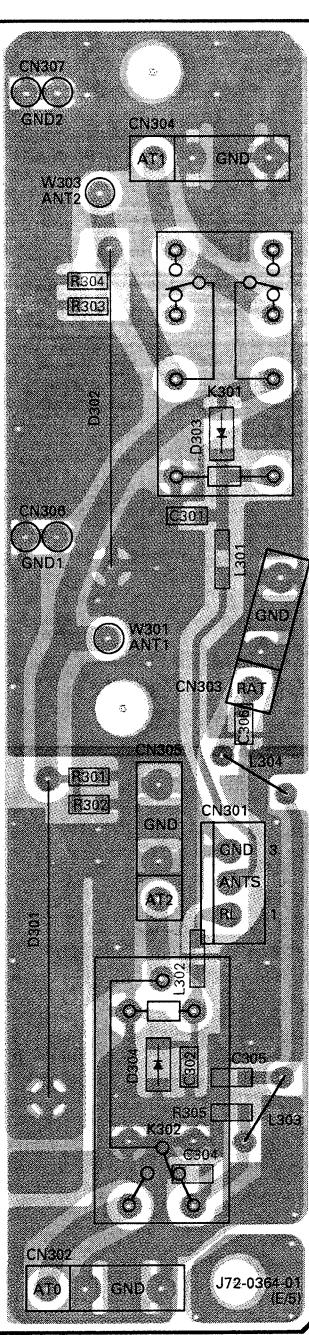


FINAL UNIT (X45-351X-XX) (E/5) : RELAY

Foil side view

0-00 : K,P,M,M2,X

2-71 : E,E2,E3,E9

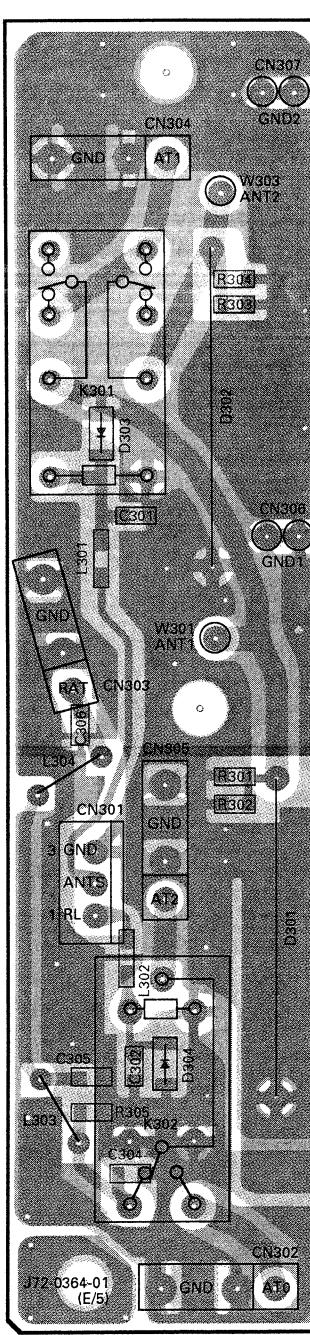


FINAL UNIT

(X45-351X-XX) (D/5) : AVR


Foil side view

0-00 : K,P,M,M2,X


2-71 : E,E2,E3,E9

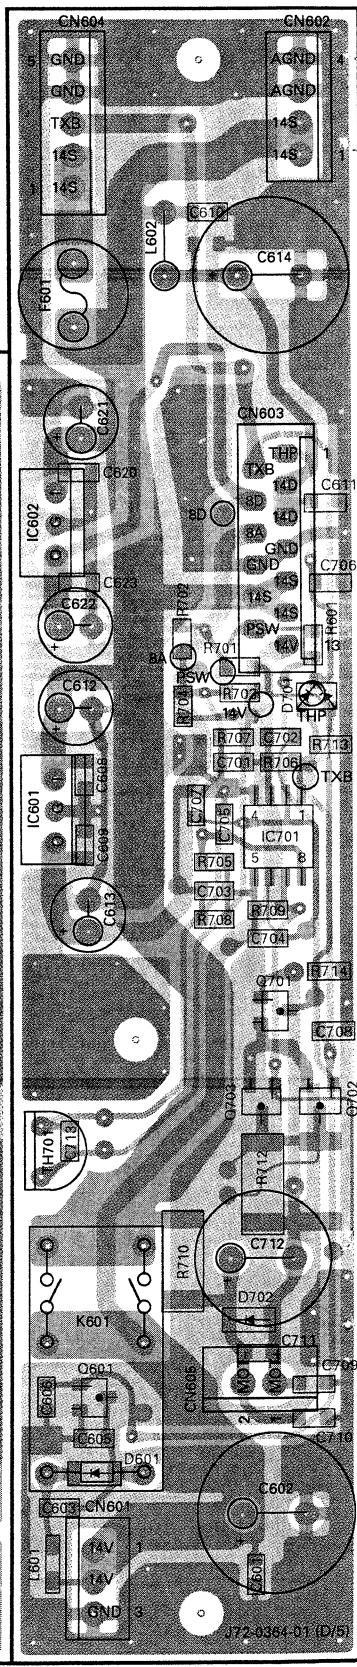


CIRCUIT DIAGRAM TS-870S

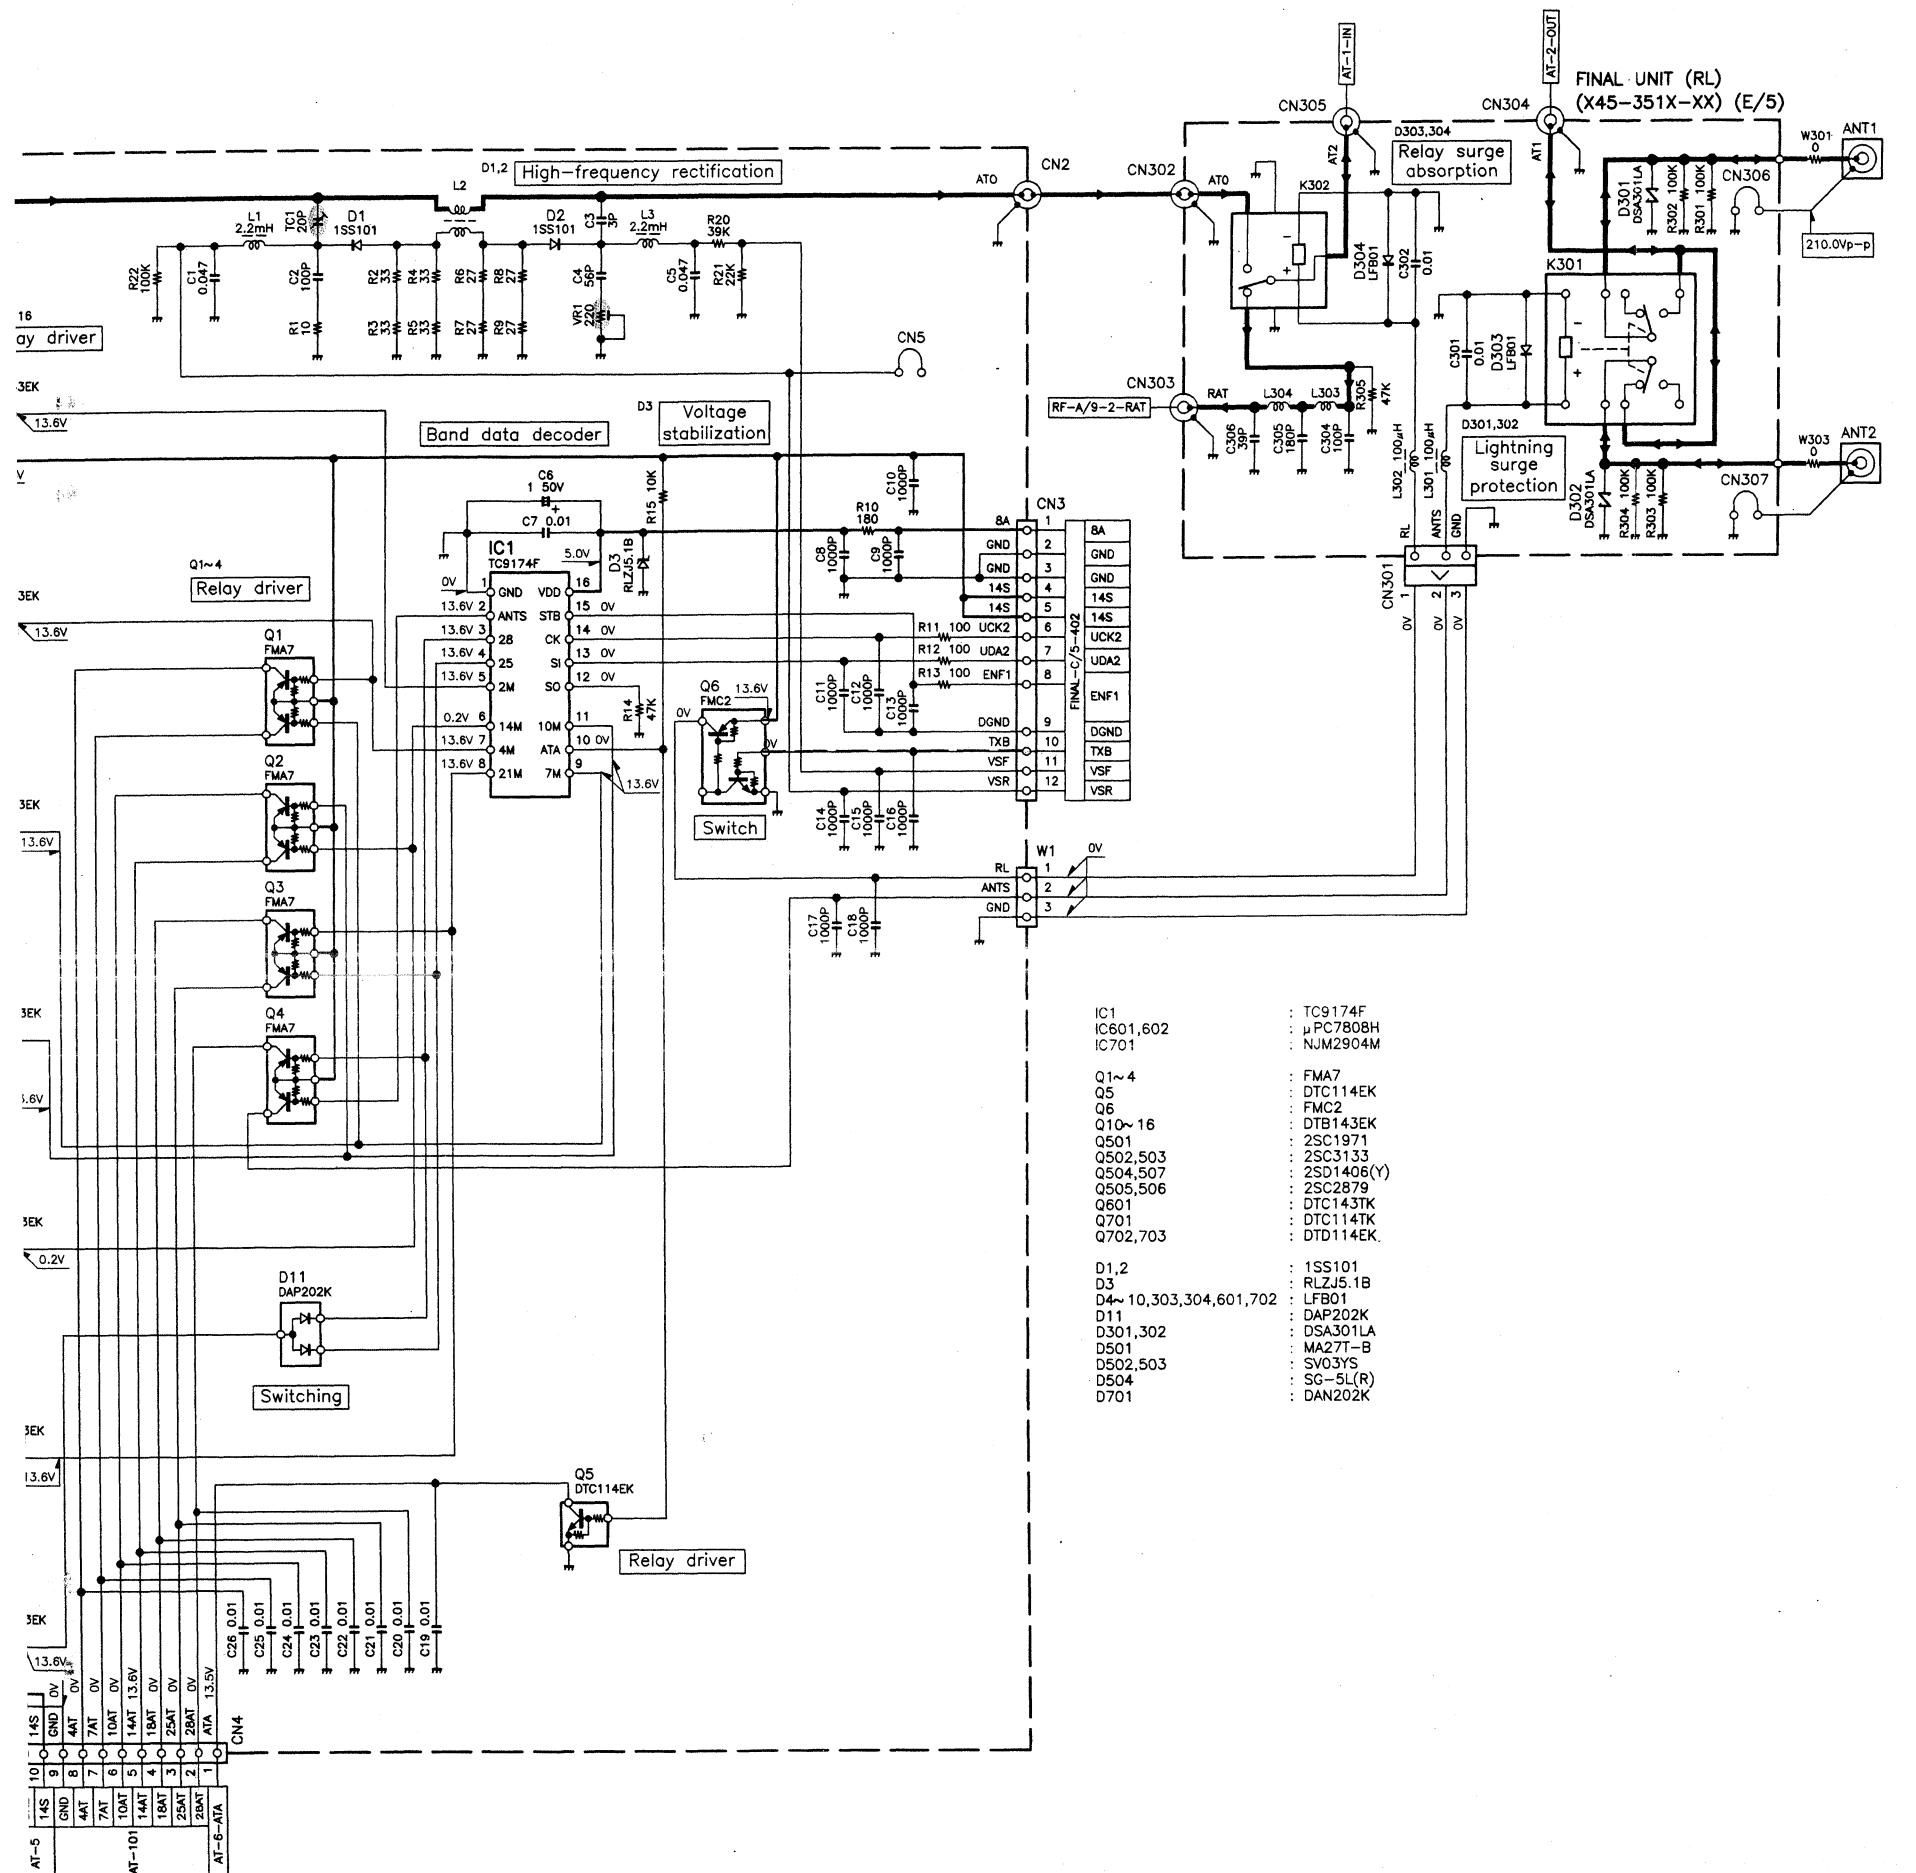


DTB143EK
DTC114EK
DTC114TK
DTC143TK
DTD114EK



2SC2879




2SC1971




2SD1406




2SC3133




UPC7808H




FMA7
FMC2



NJM2904M




TC9174F




TS-870S PC BOARD VIEWS

AT UNIT (X53-3340-02) (A/2) Component side view

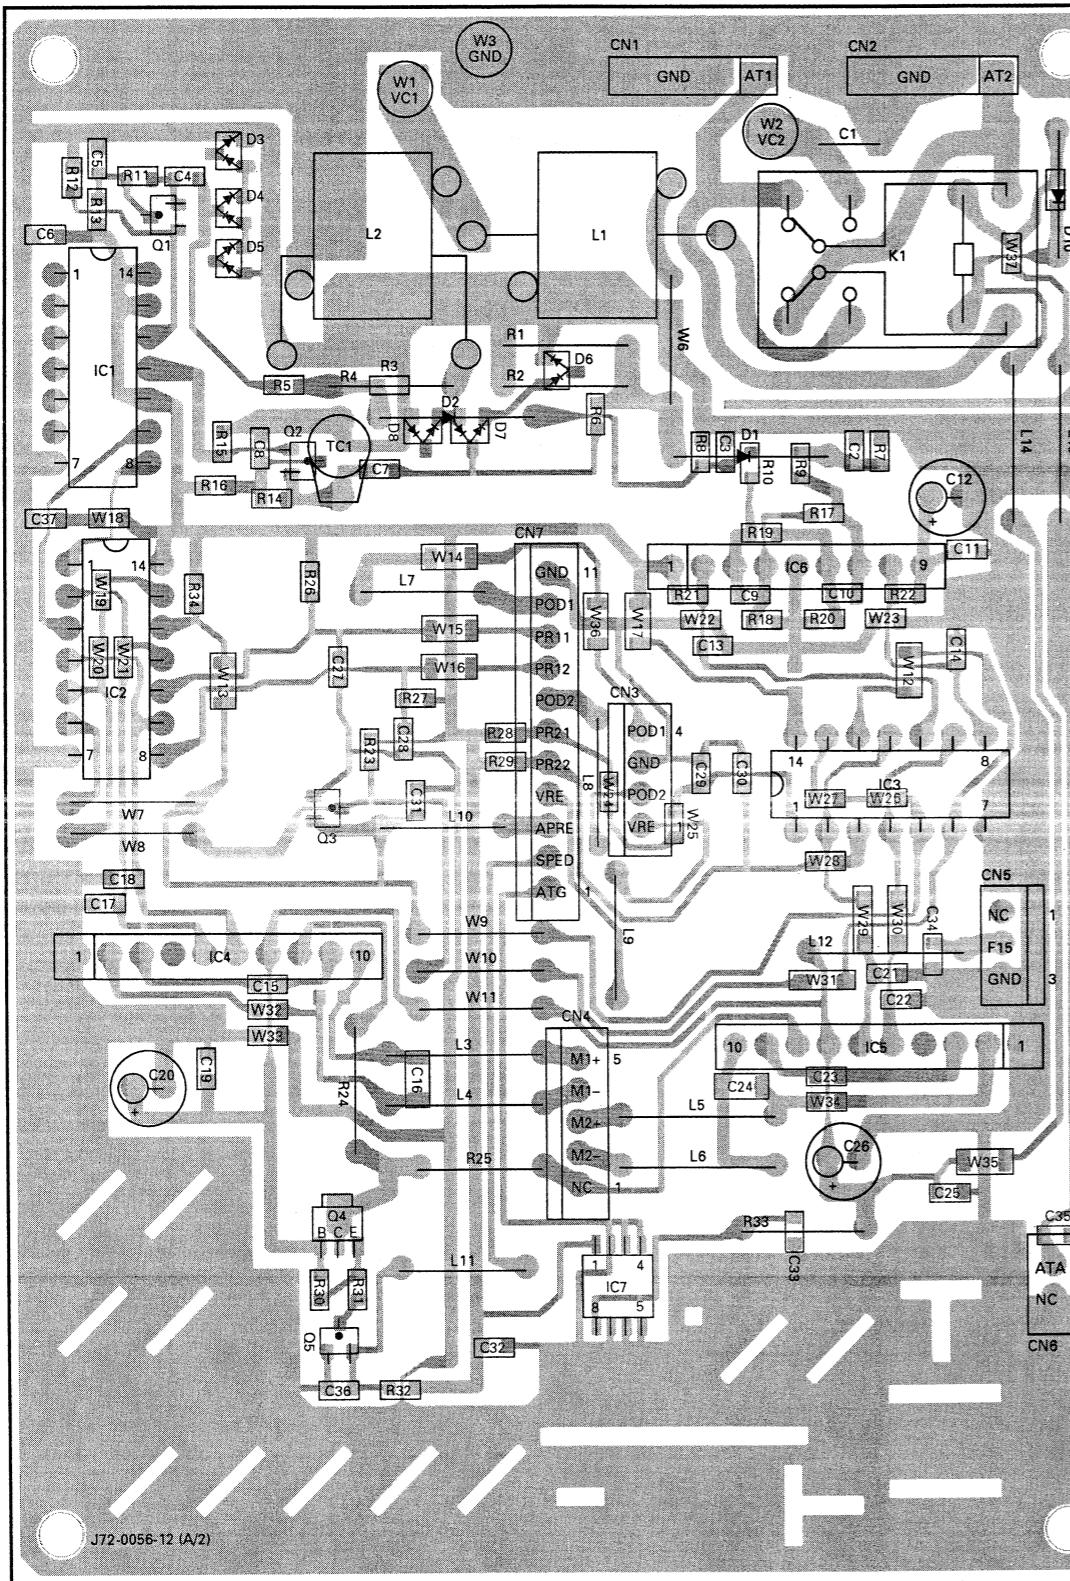


AT UNIT (X53-3340-02) (A/2) Foil side view

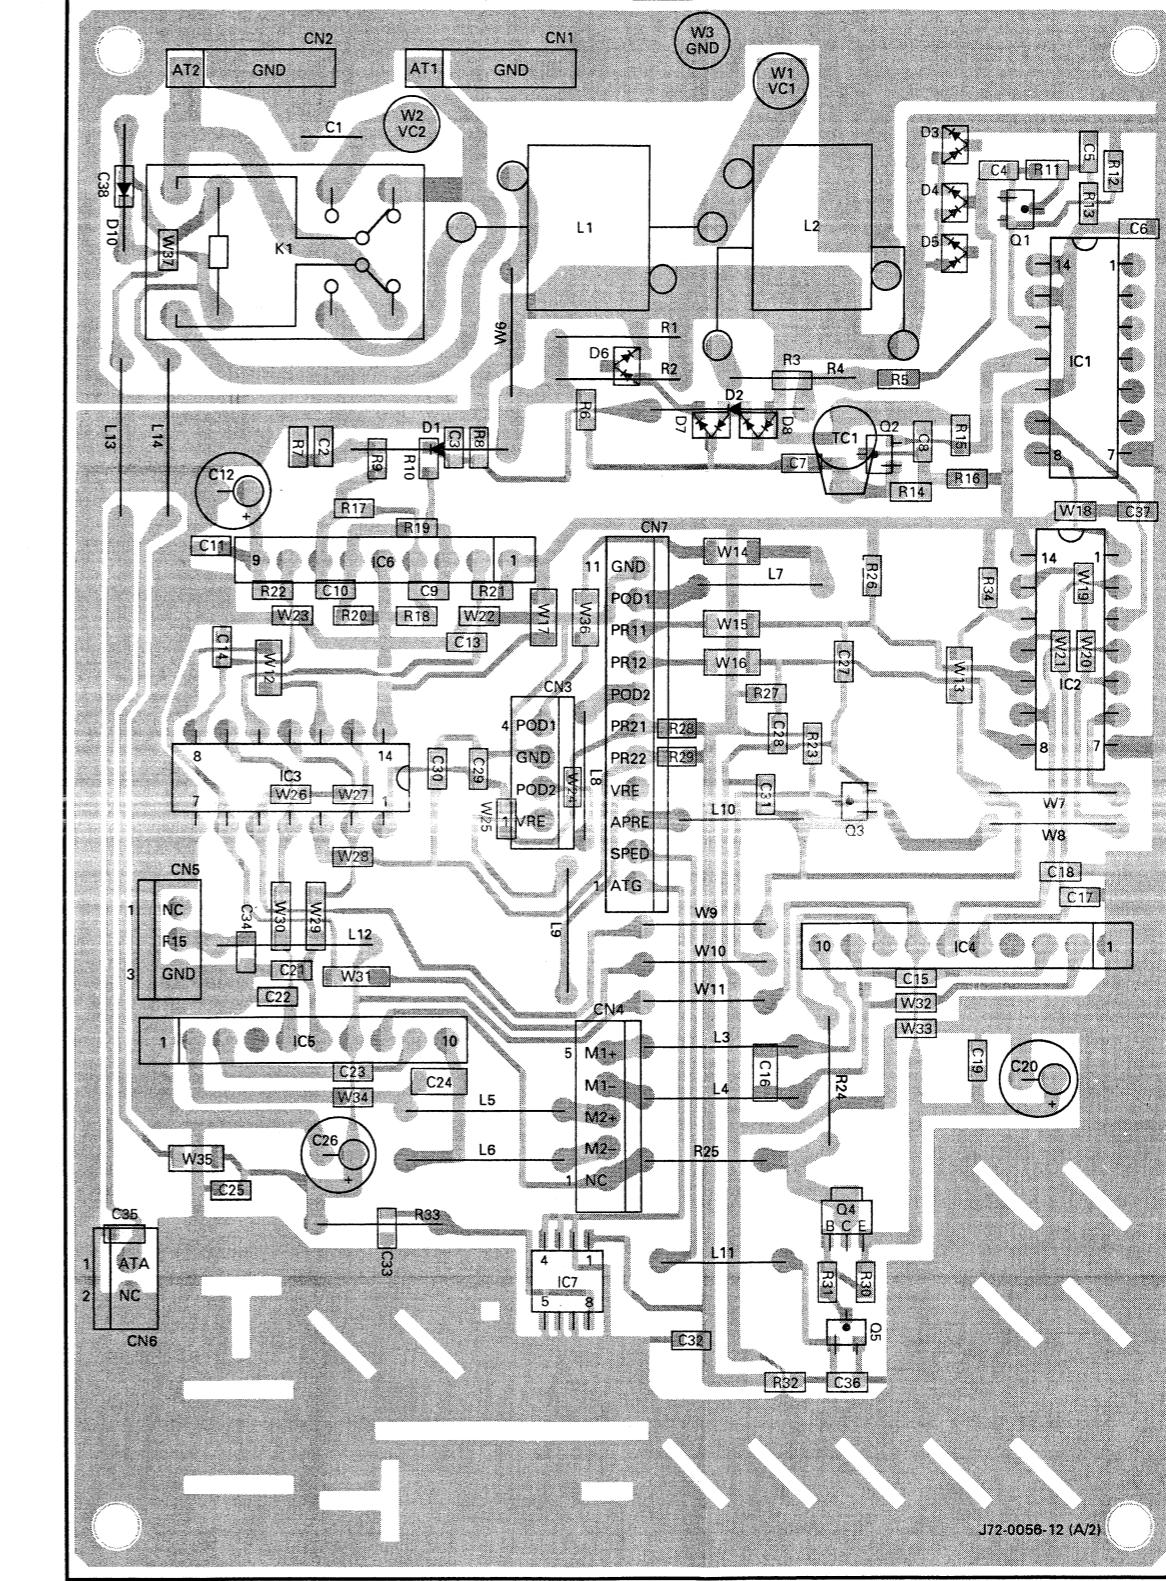

2SC2714
DTC114EK




2SA1204




MC78L05M




NJM290



TC4066




SN74S7





K L M N O P Q R S T

AT UNIT (X53-3340-02) (B/2) Component side view

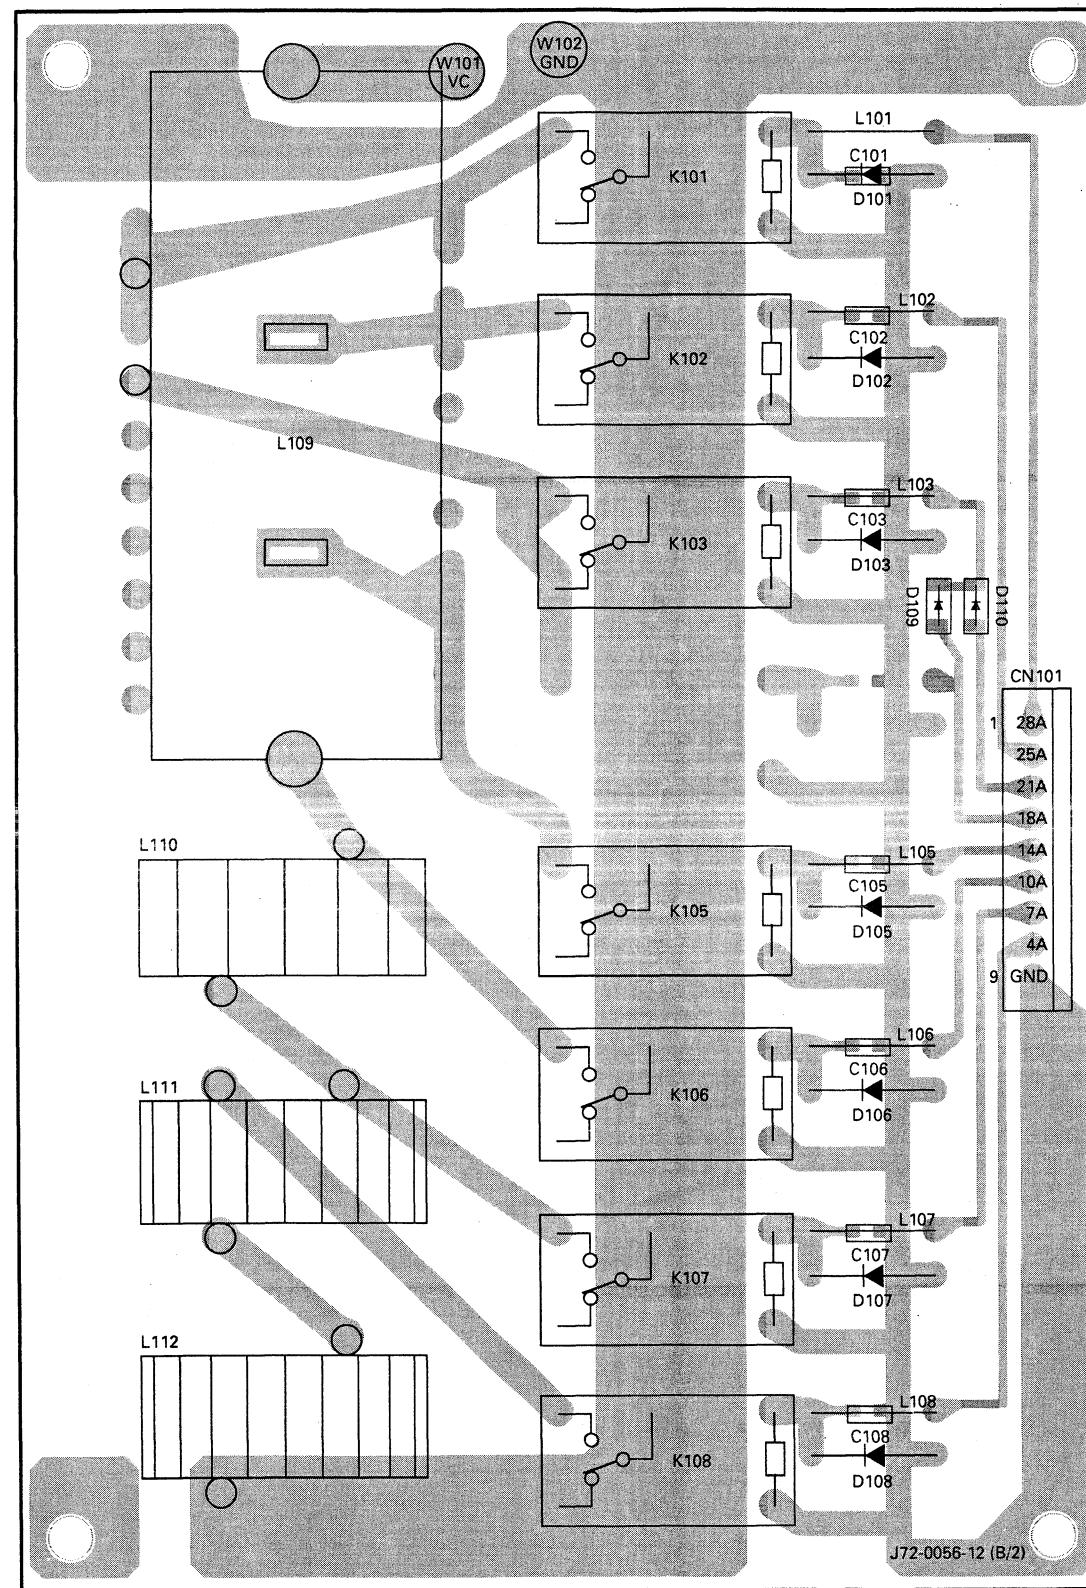


AT UNIT (X53-3340-02) (B/2) Foil side view

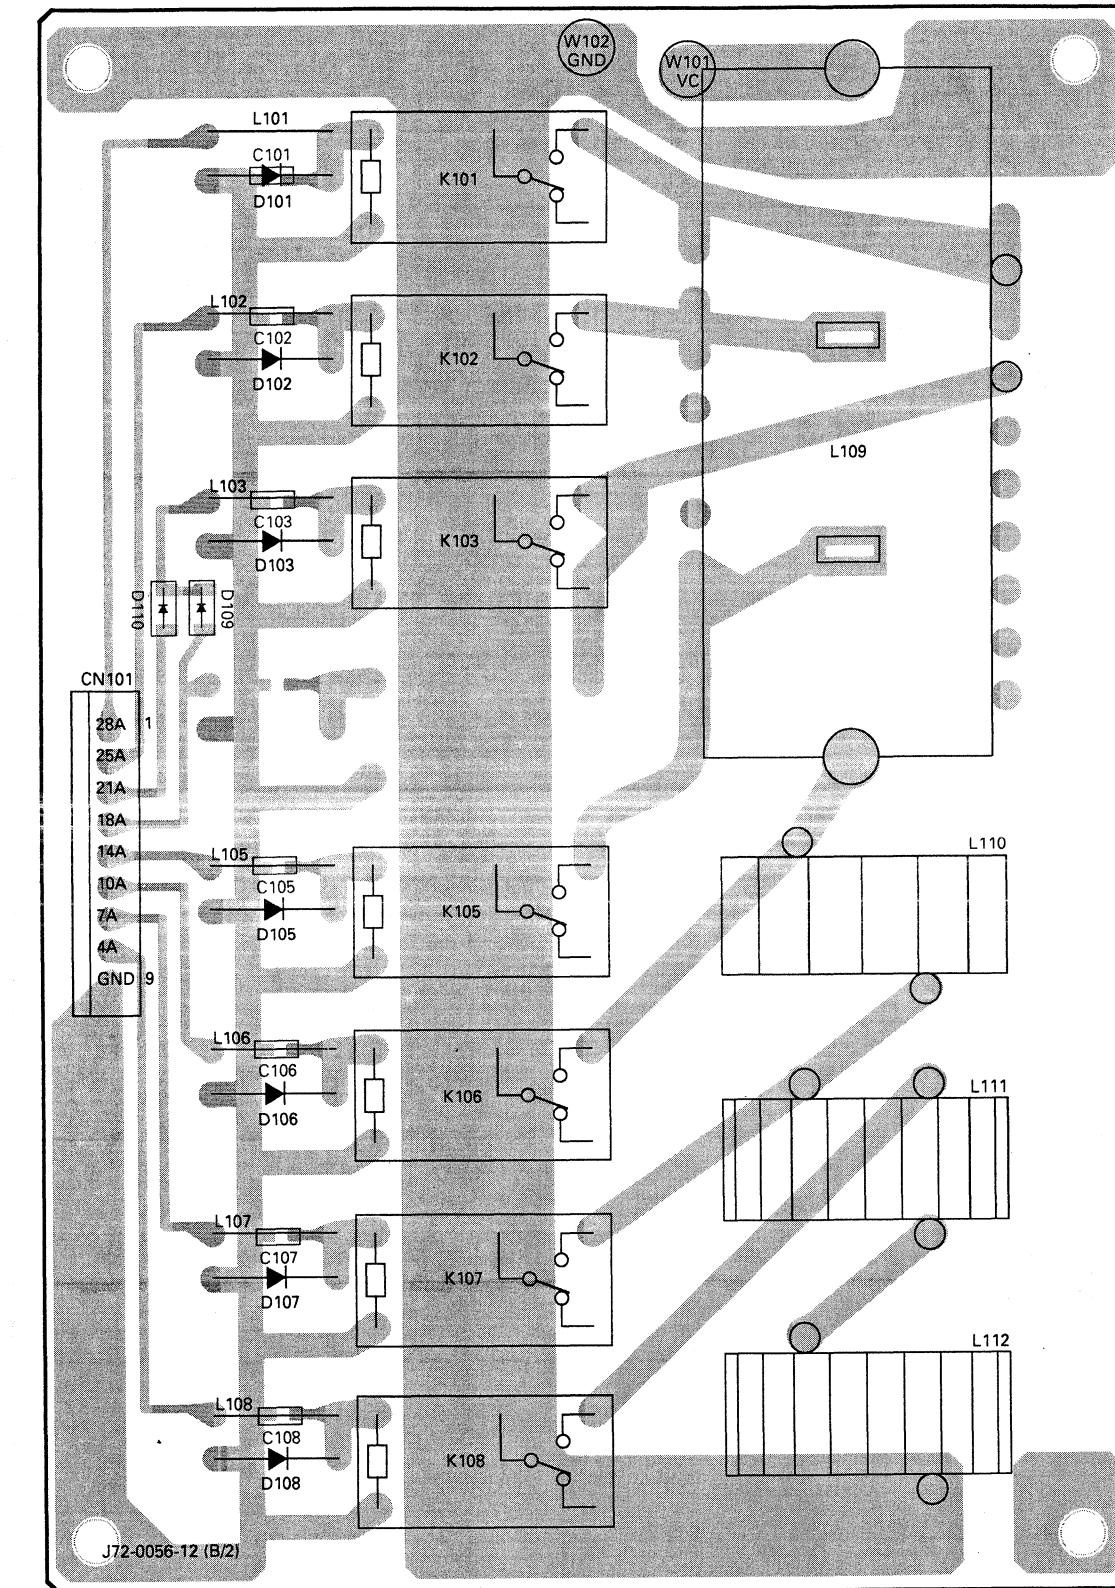

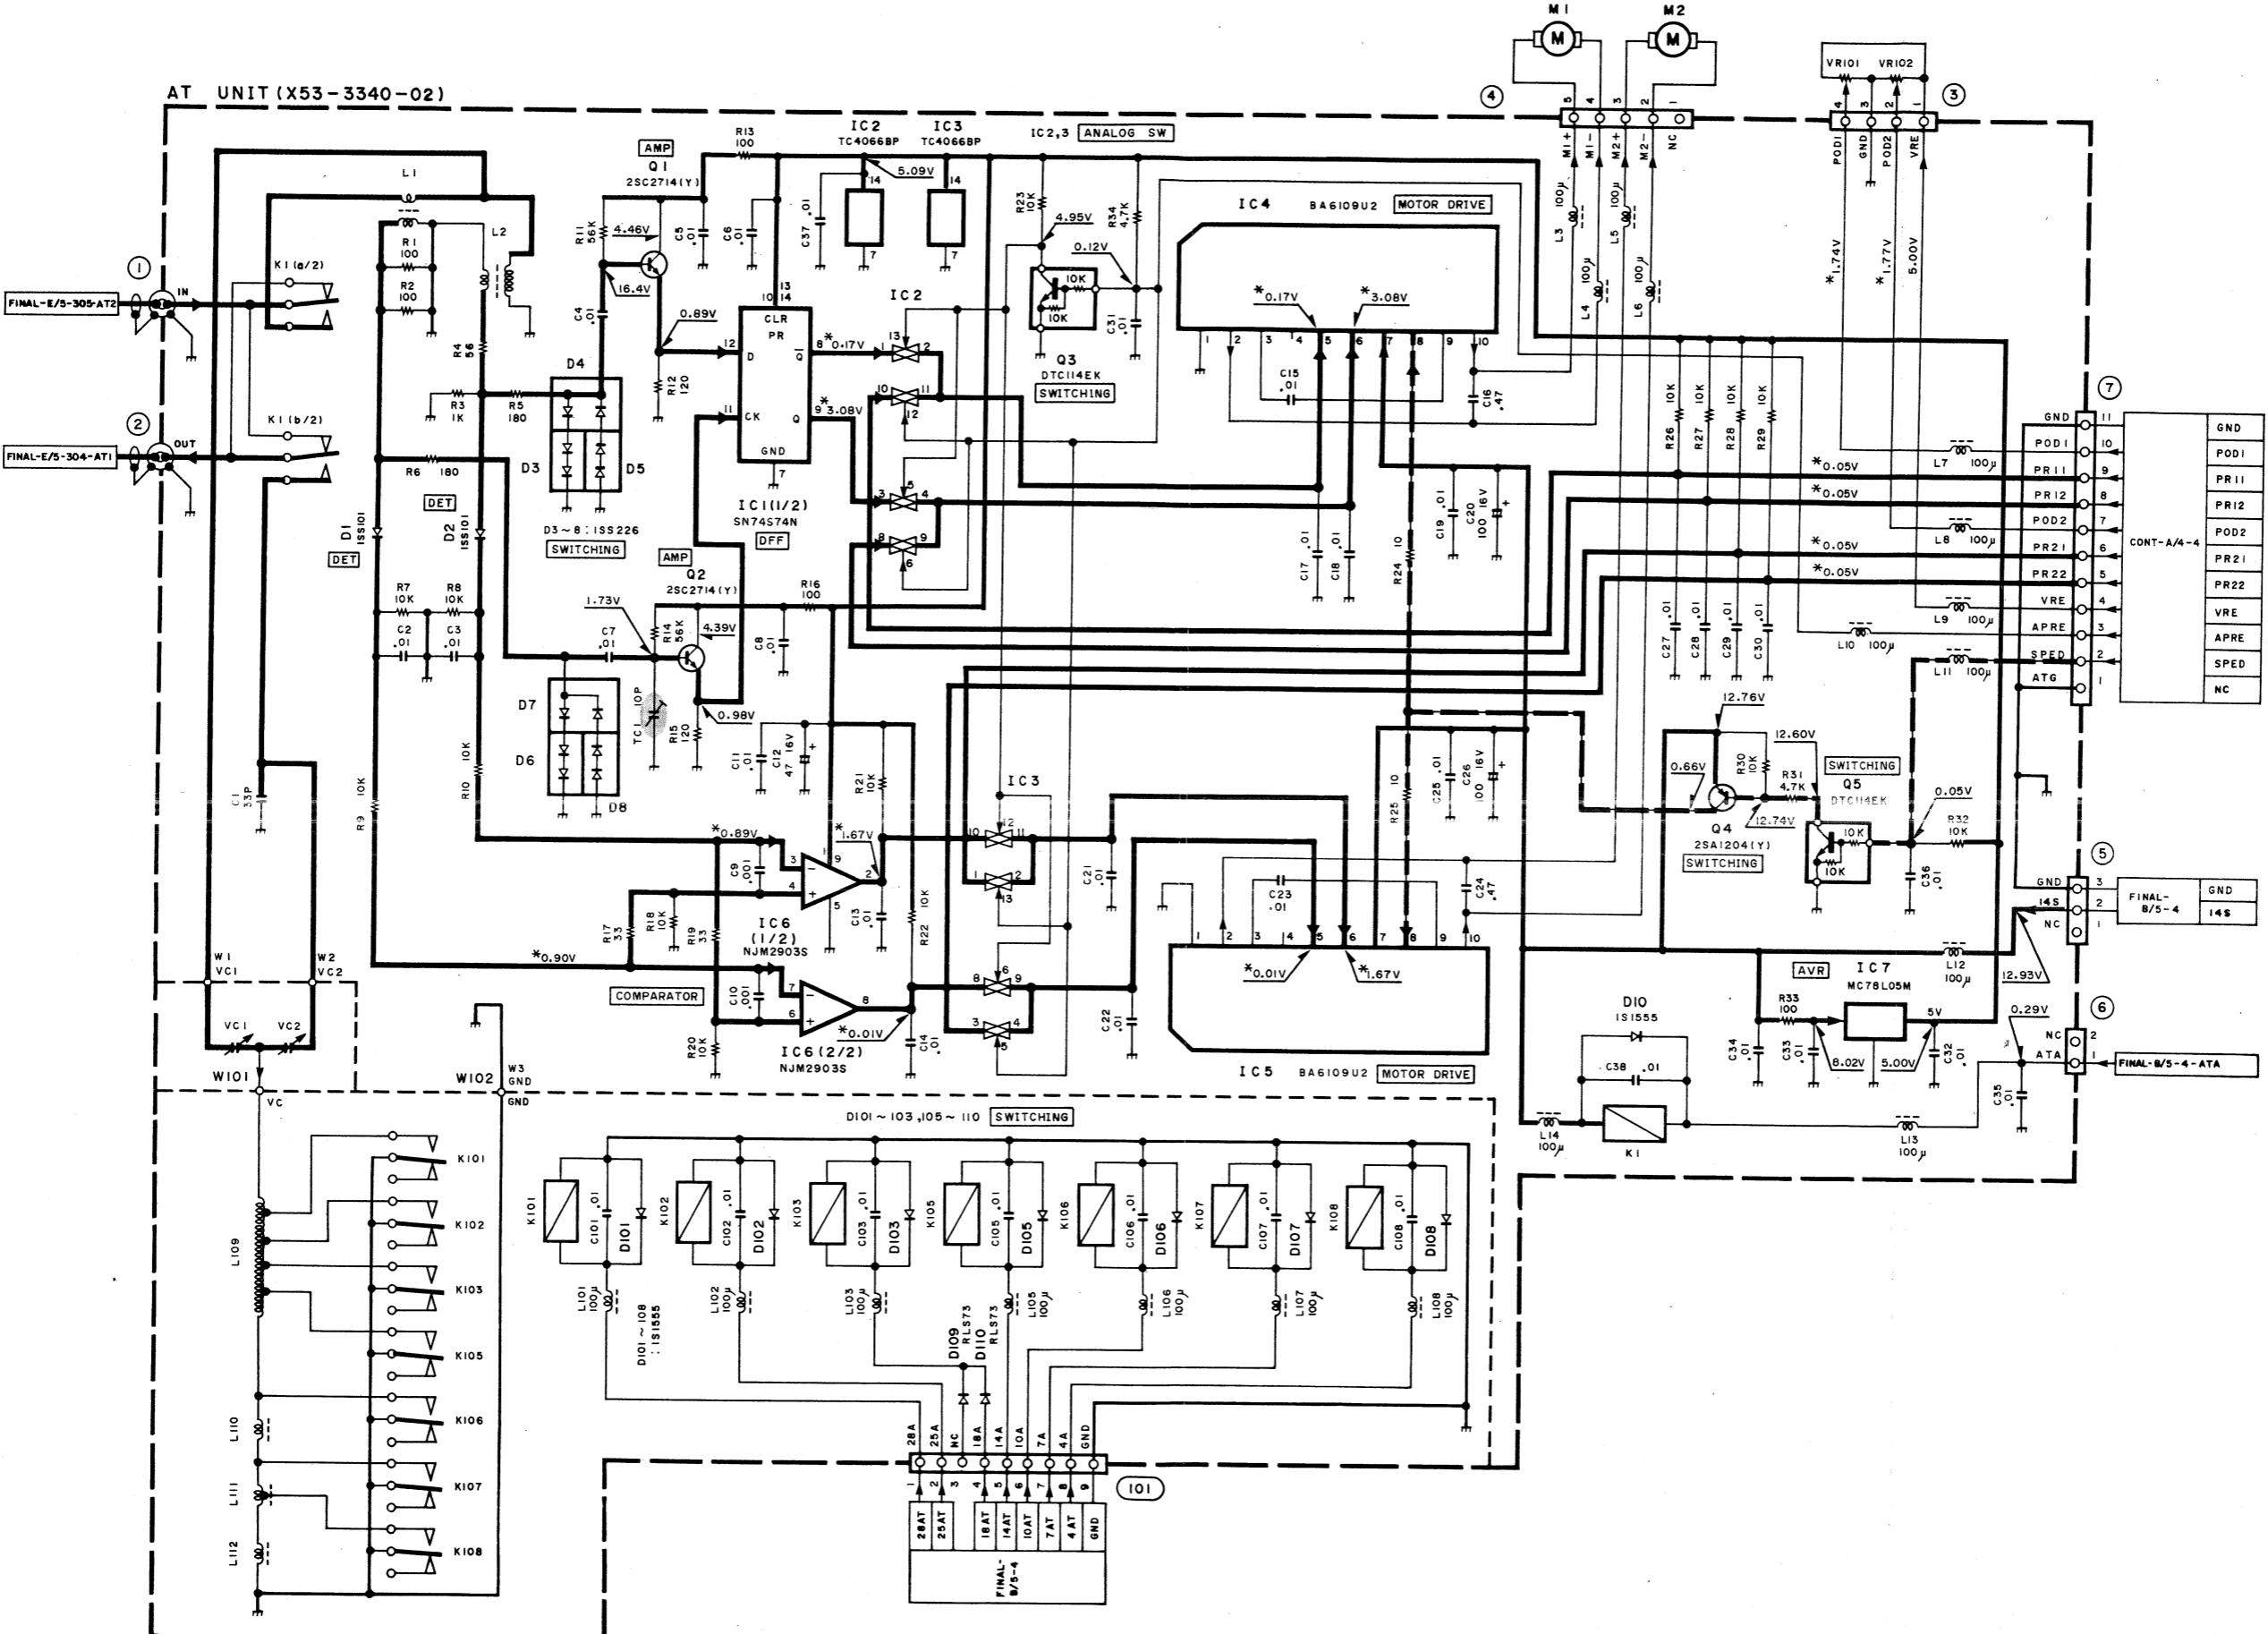


TS-870S PC BOARD VIEW

CONTROL UNIT (X53-356X-XX) (A/4) : CONTROL Component side view
0-11 : K,P 0-21 : M 0-22 : M2 0-71 : X 2-71 : E 2-72 : E2 2-73 : E3 2-74 : L

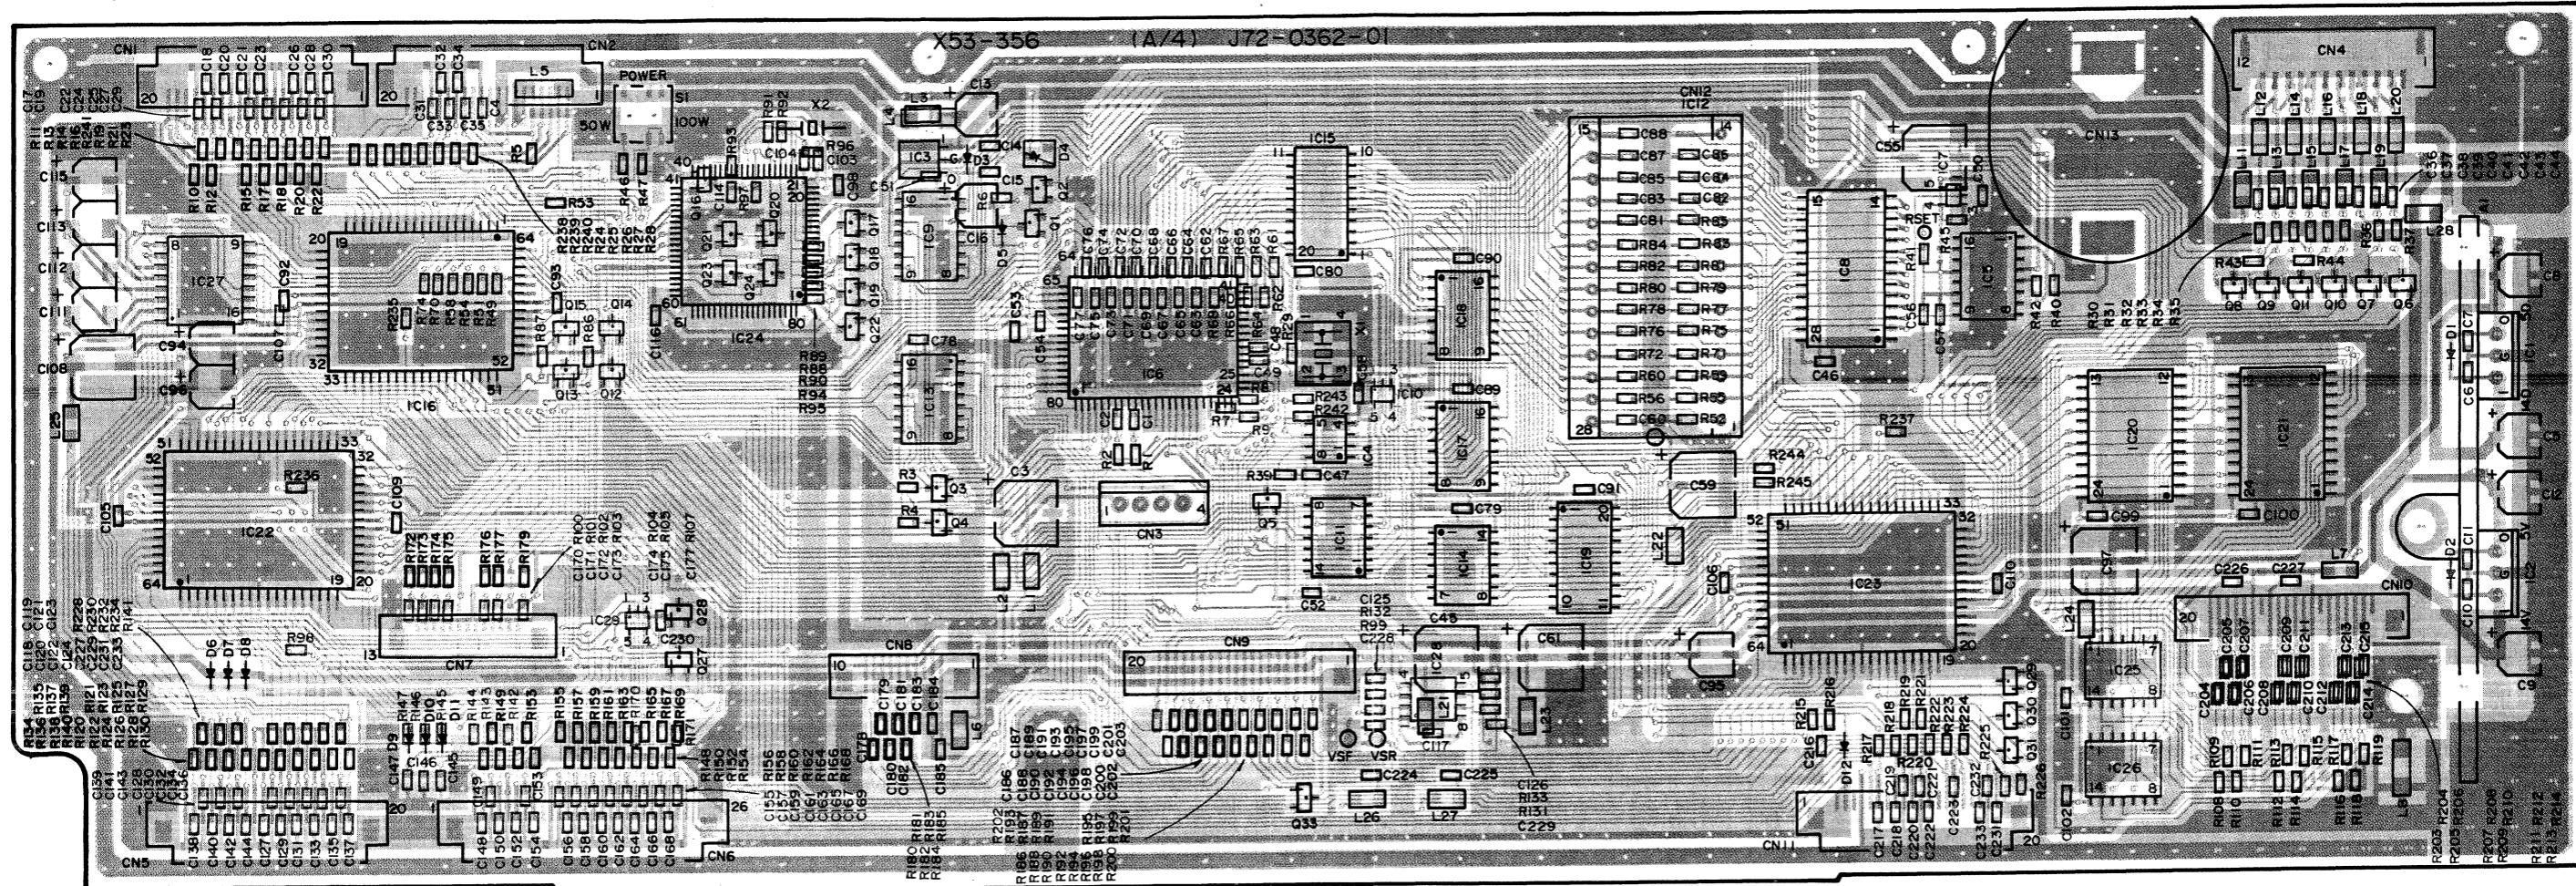

■ Component side
■ Foil side


DTA143EK
DTC143EK
DTC114EK
DTC143TK




TA78L08F




UPC7805H




TC7S0
TC7S3




NJM2904




AT2402N10S




TC74VH
TC74VH



LC3564QMF




TC4584B




CONTROL UNIT (X53-356X-XX) (A/4) : CONTROL Foil side view


0-11 : K,P 0-21 : M 0-22 : M2 0-71 : X 2-71 : E 2-72 : E2 2-73 : E3 2-74 : E9

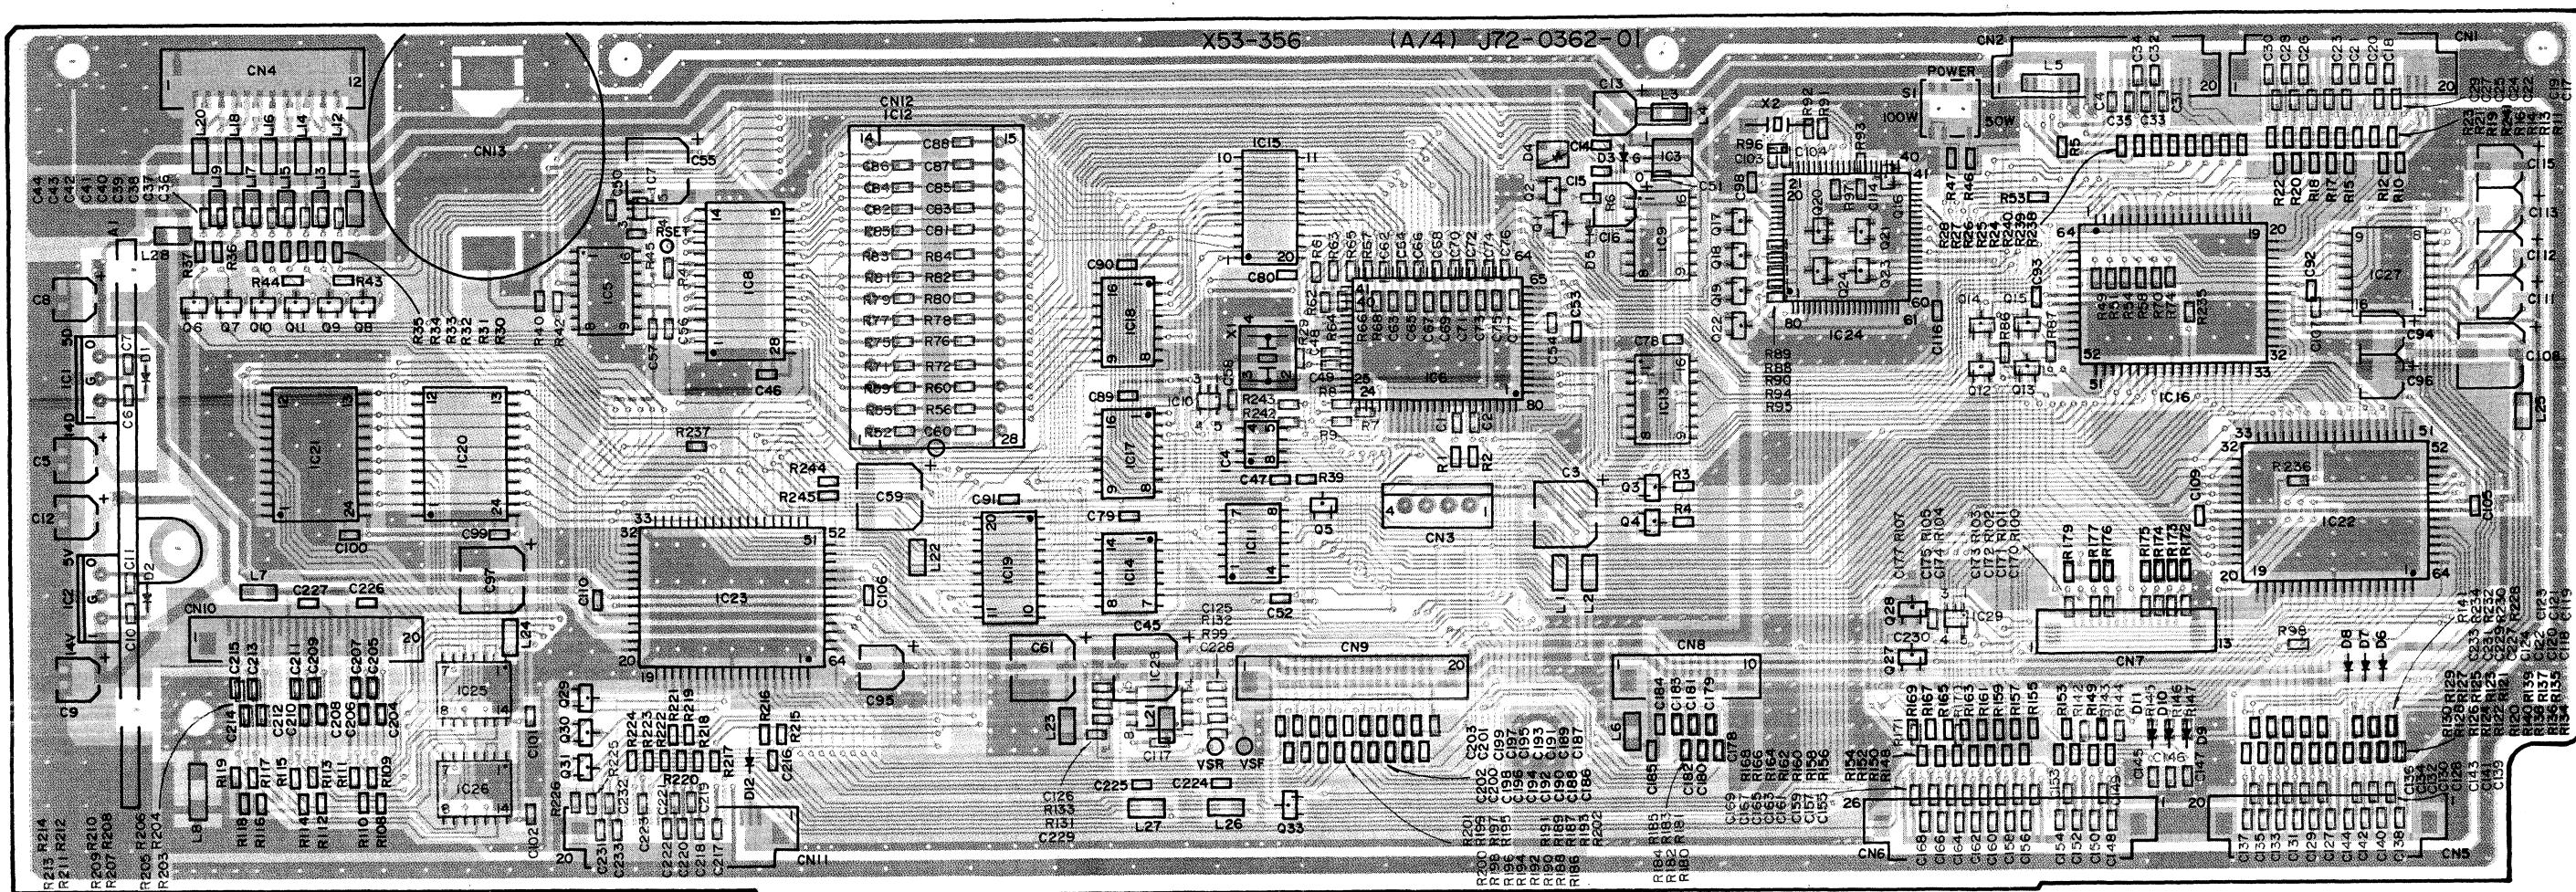


ADM232LAR




TC74VHC138F




MB3780A
UPD6345GS




TC74VHC245F
TC74VHC573F




LZ92K371




27C512RJLB-K




CXD1095Q



M37702S4BFP




68HC05G2419553




K L M N O P Q R S I
CONTROL UNIT (X53-356X-XX) (B/4) : SW Component side view

0-11 : K,P 0-21 : M 0-22 : M2 0-71 : X 2-71 : E 2-72 : E2 2-73 : E3 2-74 : E9

PC BOARD VIEWS TS-870S

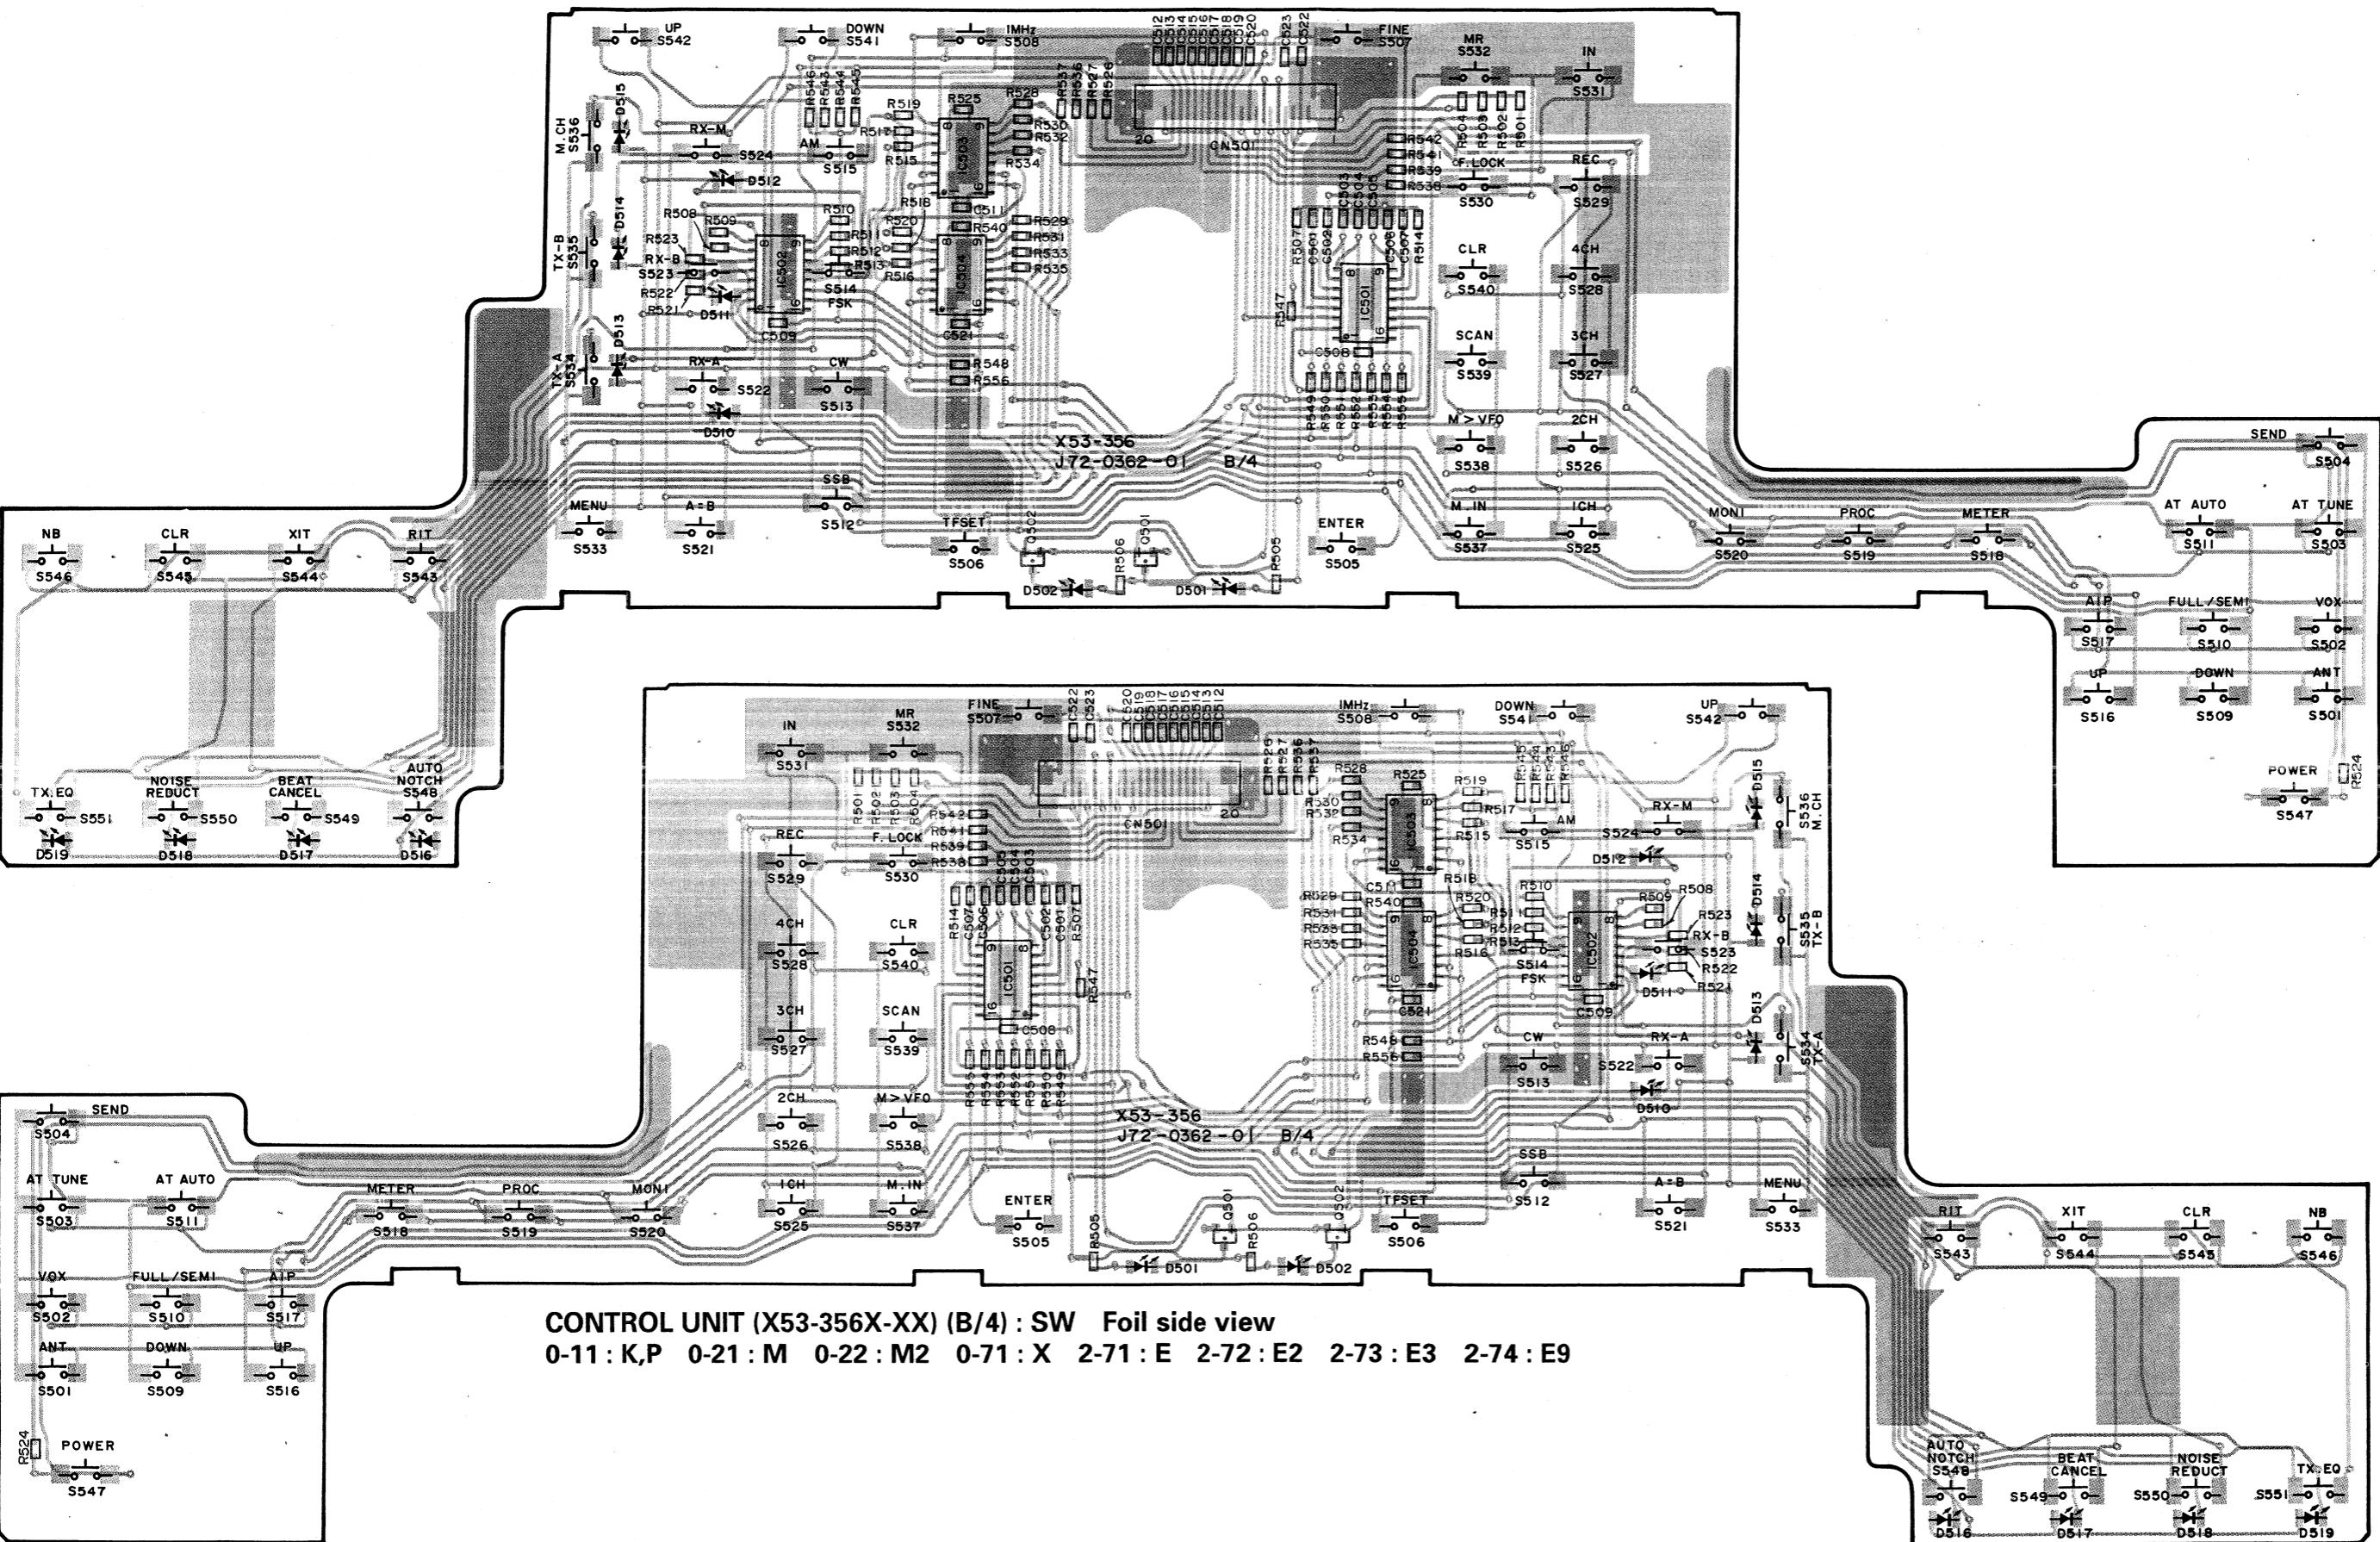


TS-870S CIRCUIT DIAGRAM

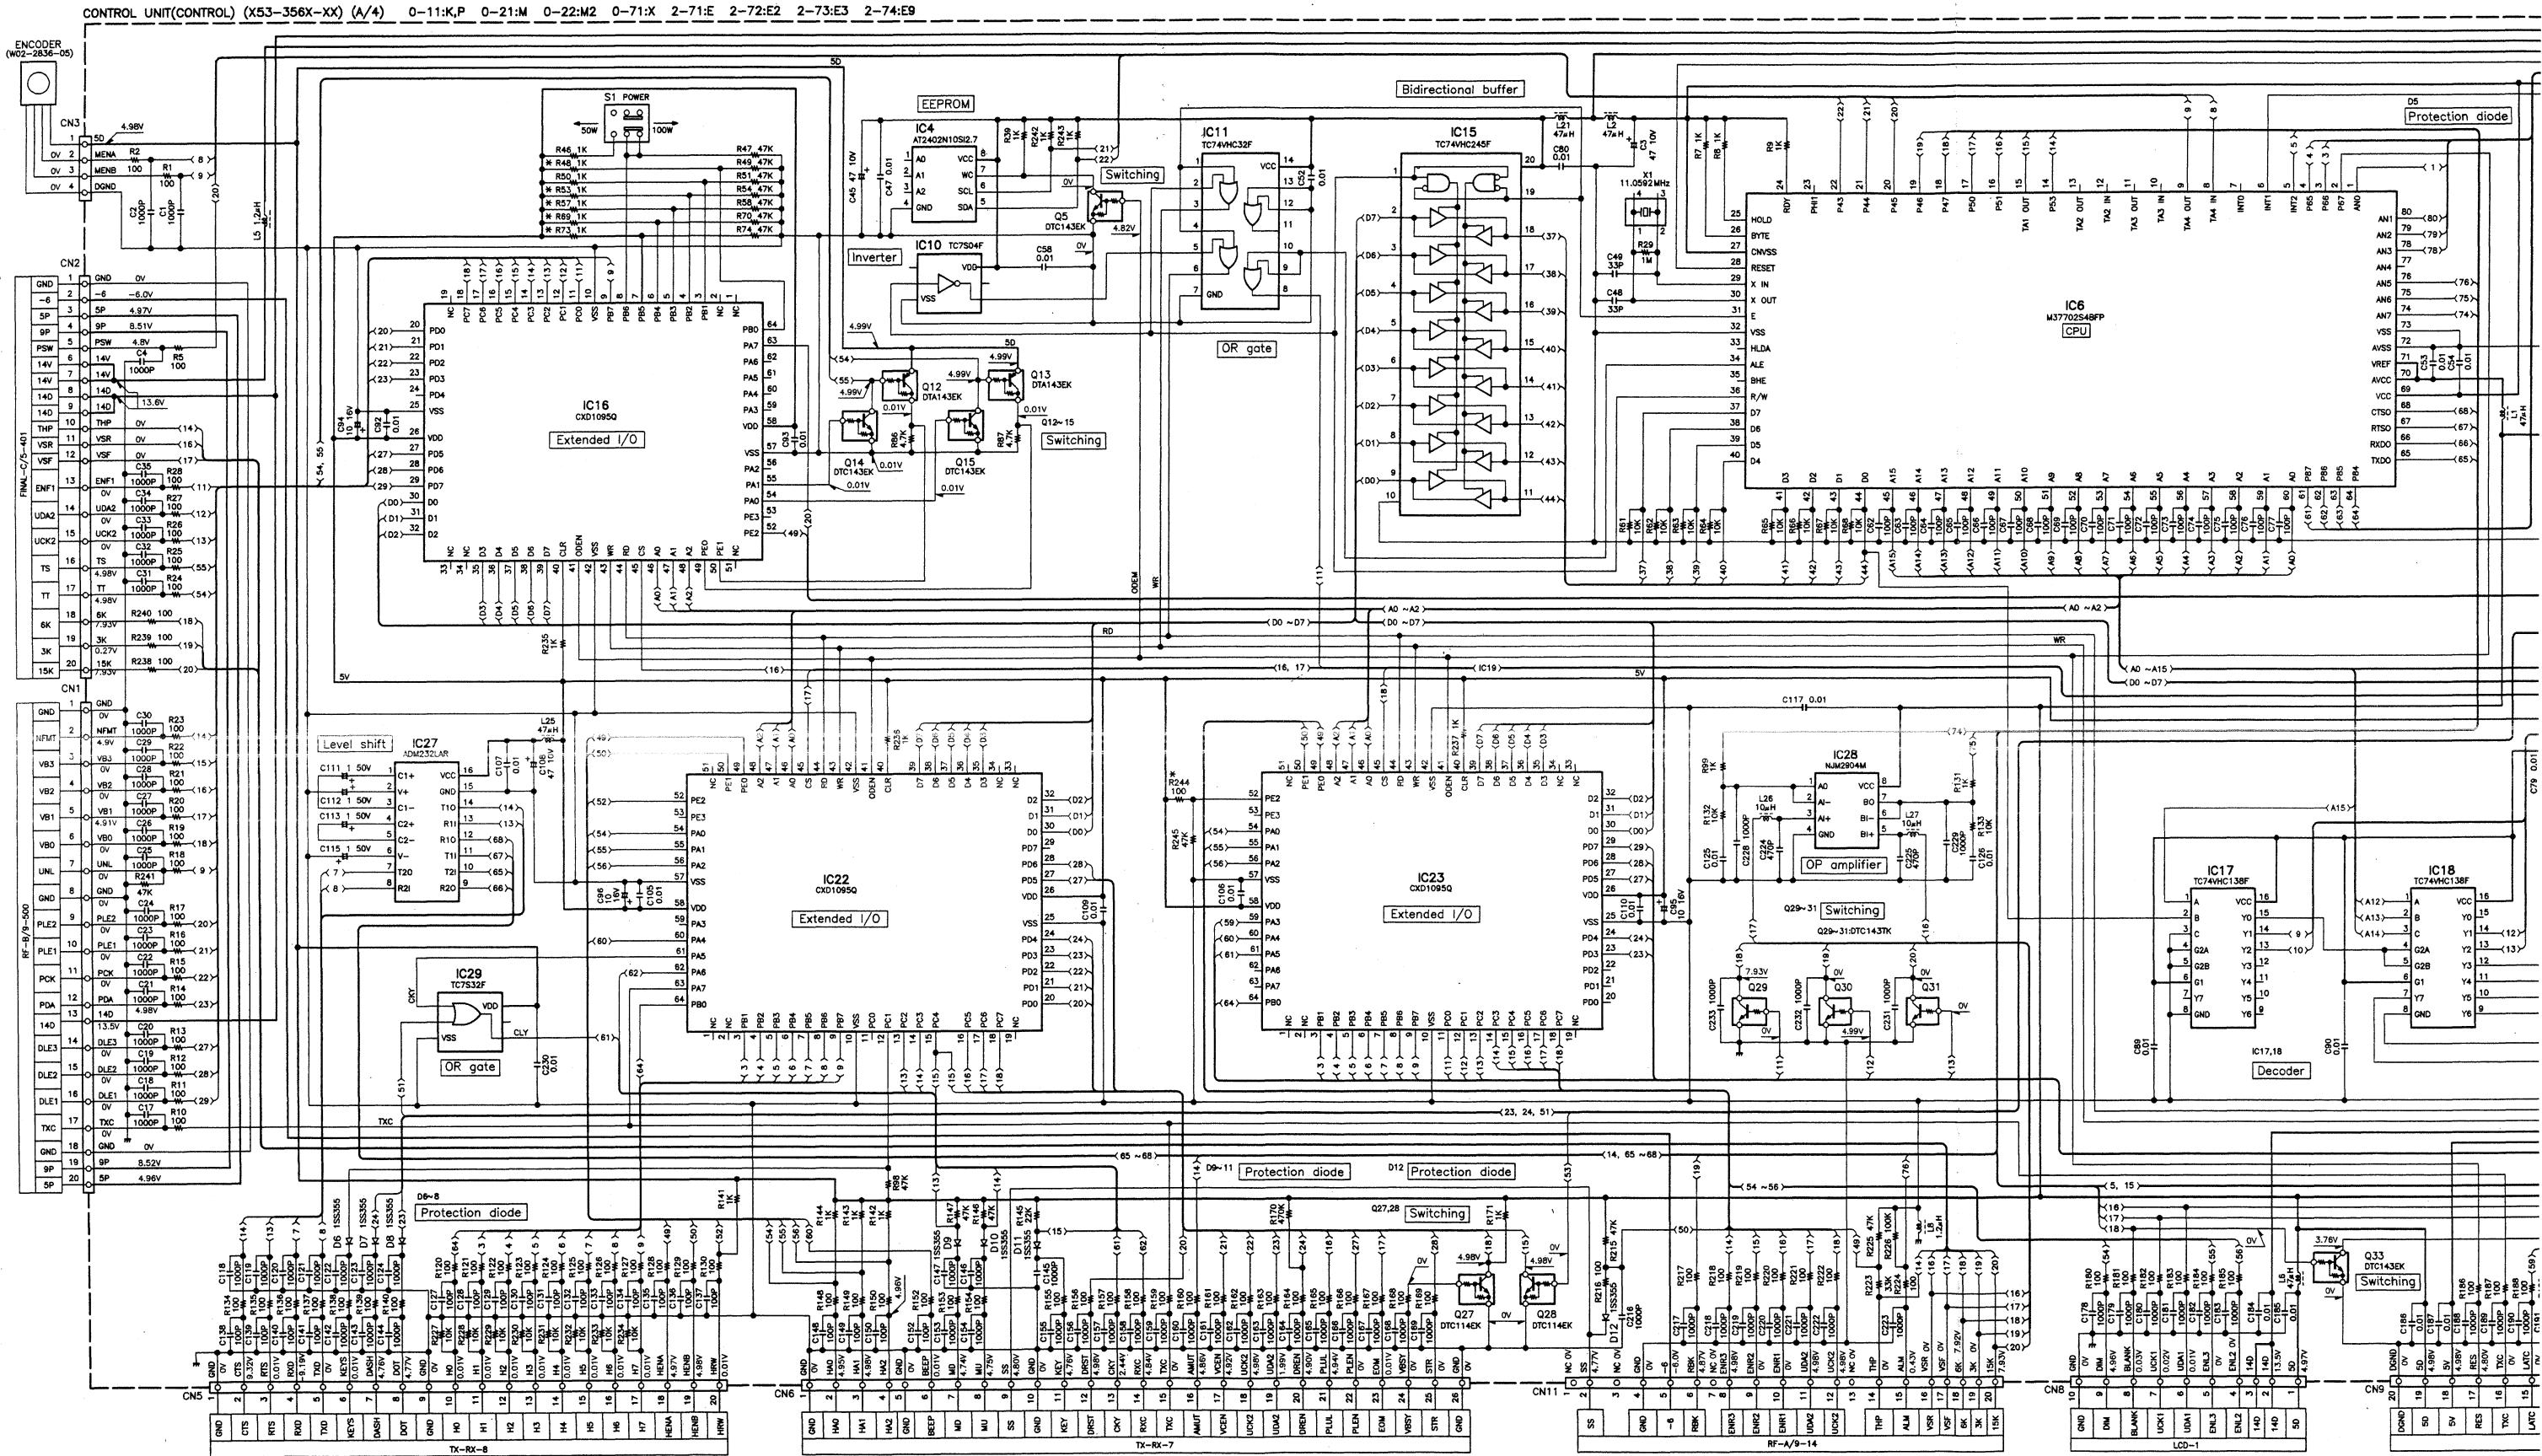

CONTROL UNIT (X53-356X-XX) (A/4) : CONTROL

0-11 : K,P 0-21 : M 0-22 : M2 0-71 : X 2-71 : E 2-72 : E2 2-73 : E3 2-74 : E9

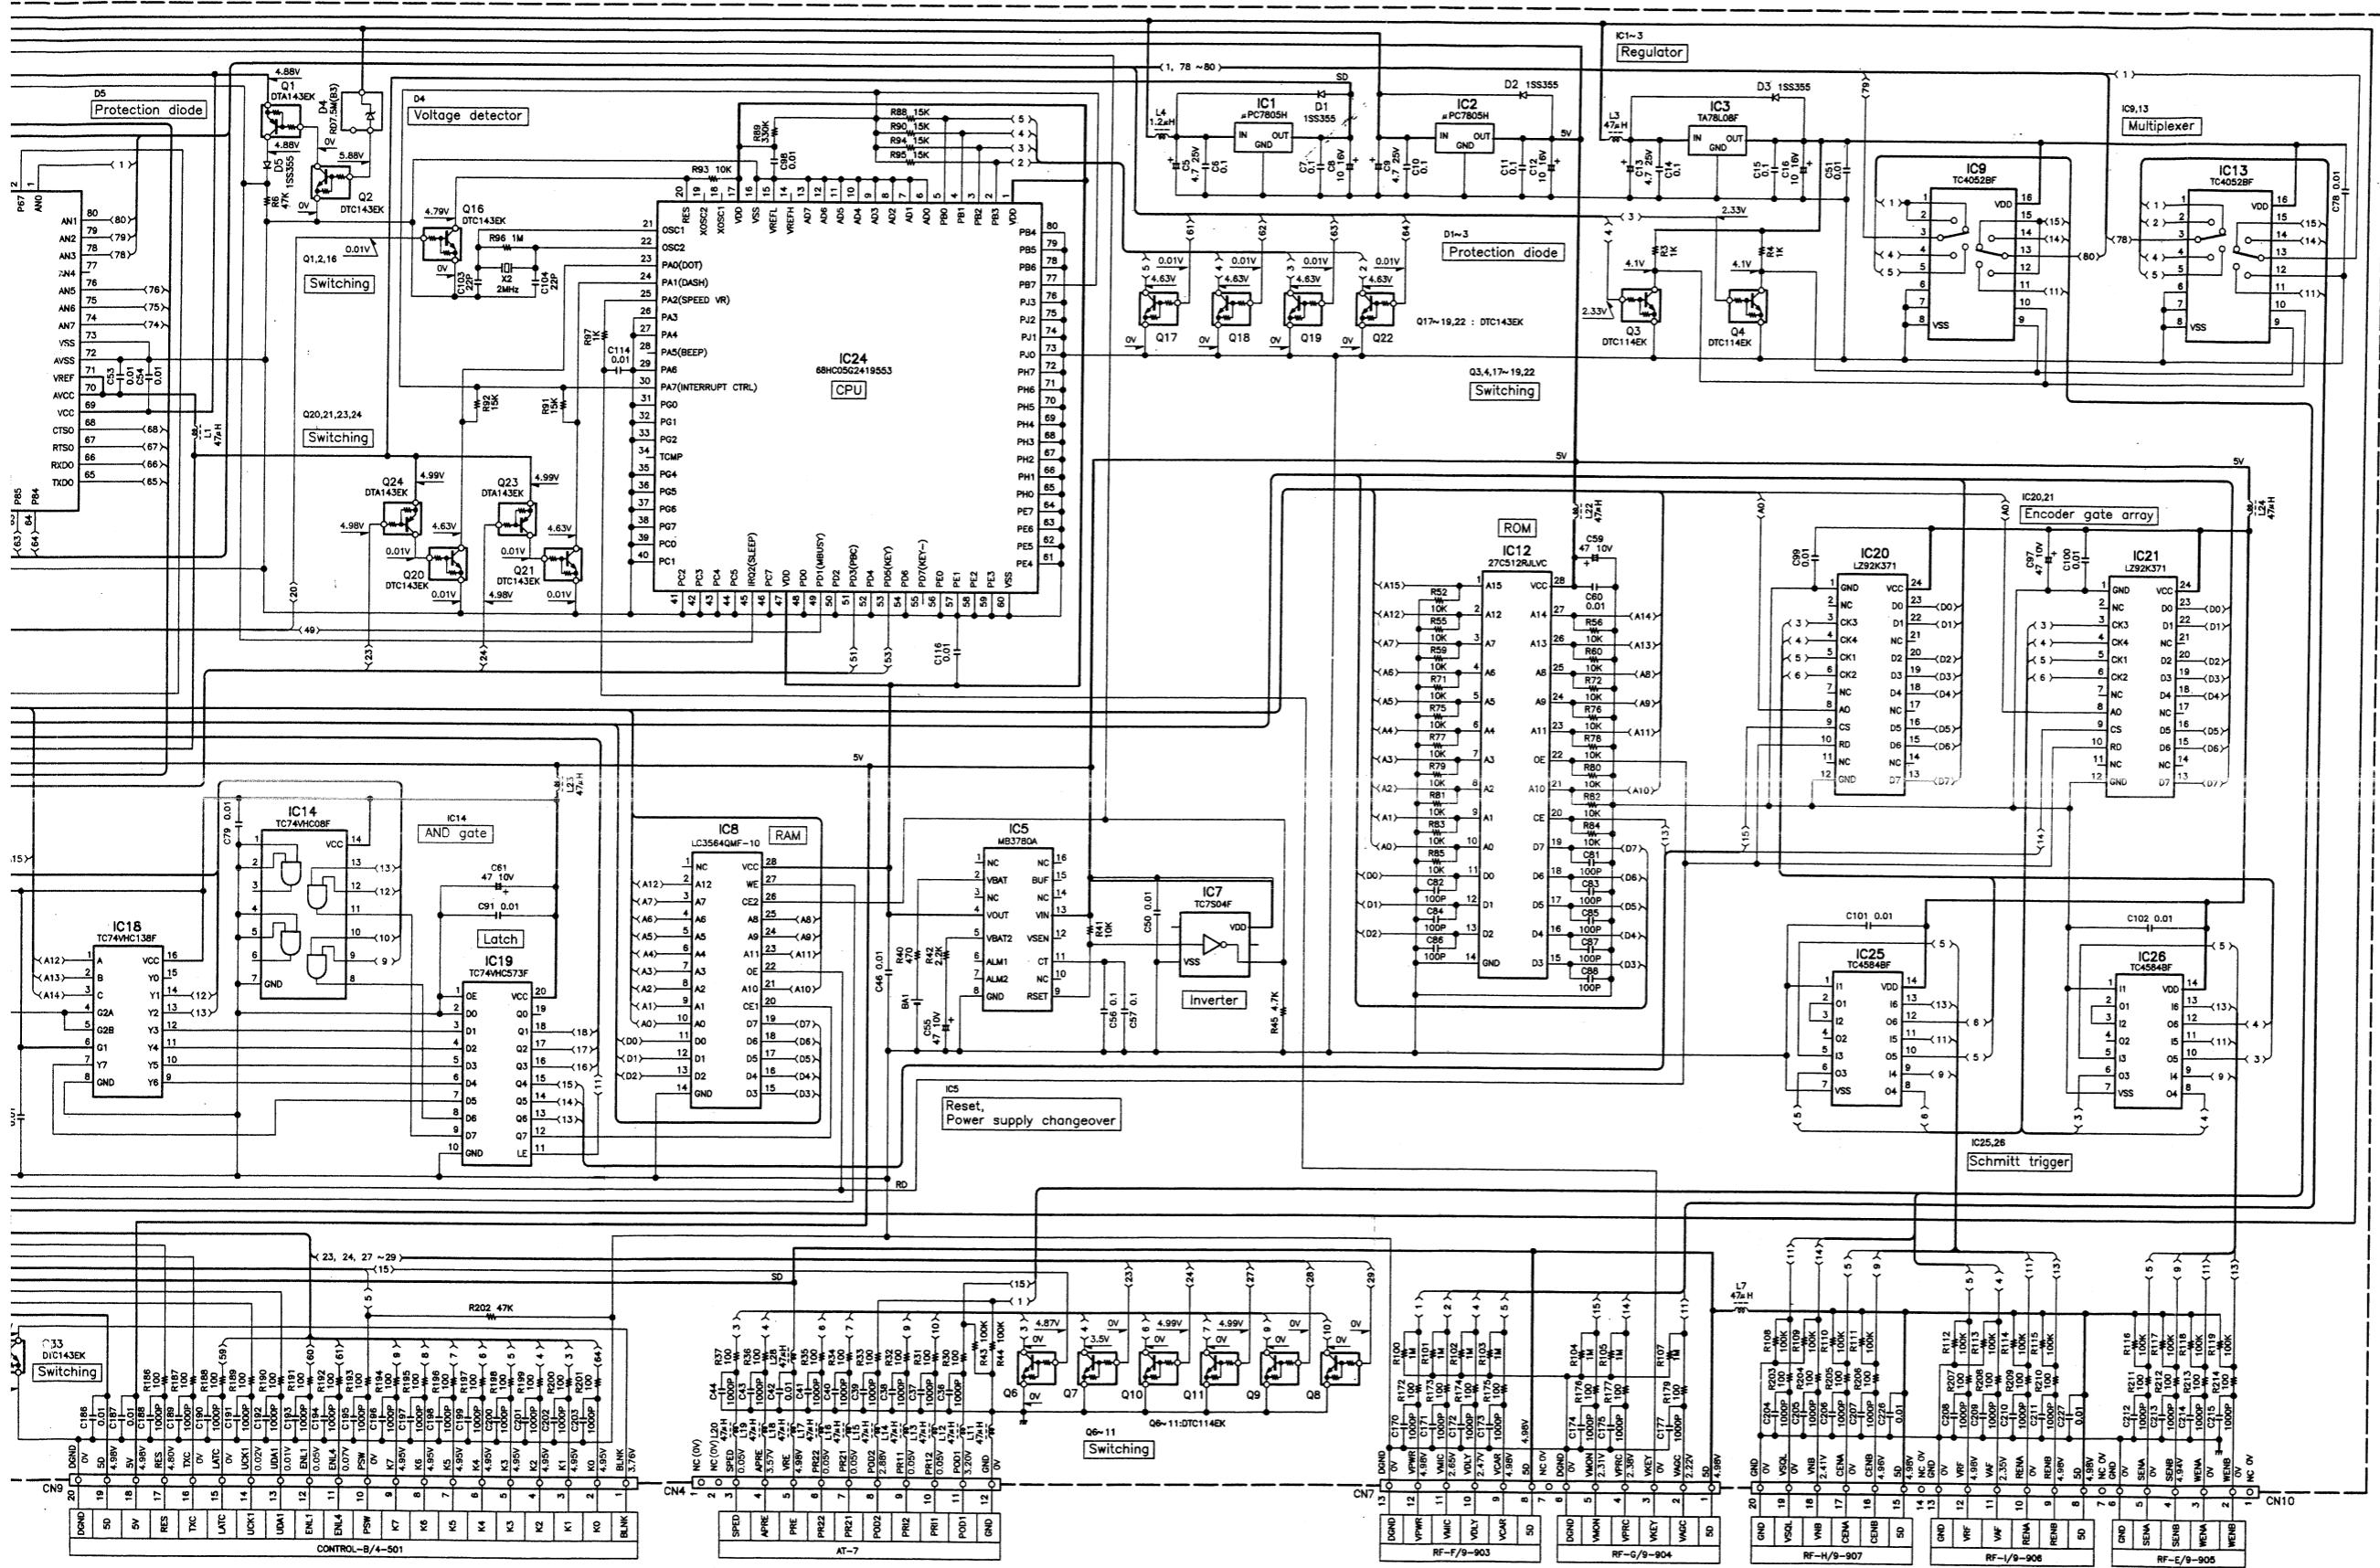


| | | | | | | | |
|------|----|-----|-----|-----|-----|-----|-----|
| 0-21 | M | NO | YES | NO | YES | NO | YES |
| 0-22 | M2 | NO | NO | NO | YES | NO | NO |
| 0-71 | X | YES | NO | NO | NO | NO | YES |
| 2-71 | E | NO | NO | YES | NO | YES | YES |
| 2-72 | E2 | NO | NO | YES | YES | NO | YES |
| 2-73 | E3 | NO | YES | YES | NO | NO | YES |
| 2-74 | E8 | NO | YES | YES | NO | NO | YES |

CIRCUIT DIAGRAM TS-870S

CONTROL UNIT (X53-356X-XX) (B/4) : SW

0-11 : K,P 0-21 : M 0-22 : M2 0-71 : X 2-71 : E 2-72 : E2 2-73 : E3 2-74 : E9


CONTROL UNIT (SW) (X53-356X-XX) (B/4) 0-11:K,P 0-21:M 0-22:M2 0-71:X 2-71:E 2-72:E2 2-73:E3 2-74:E9

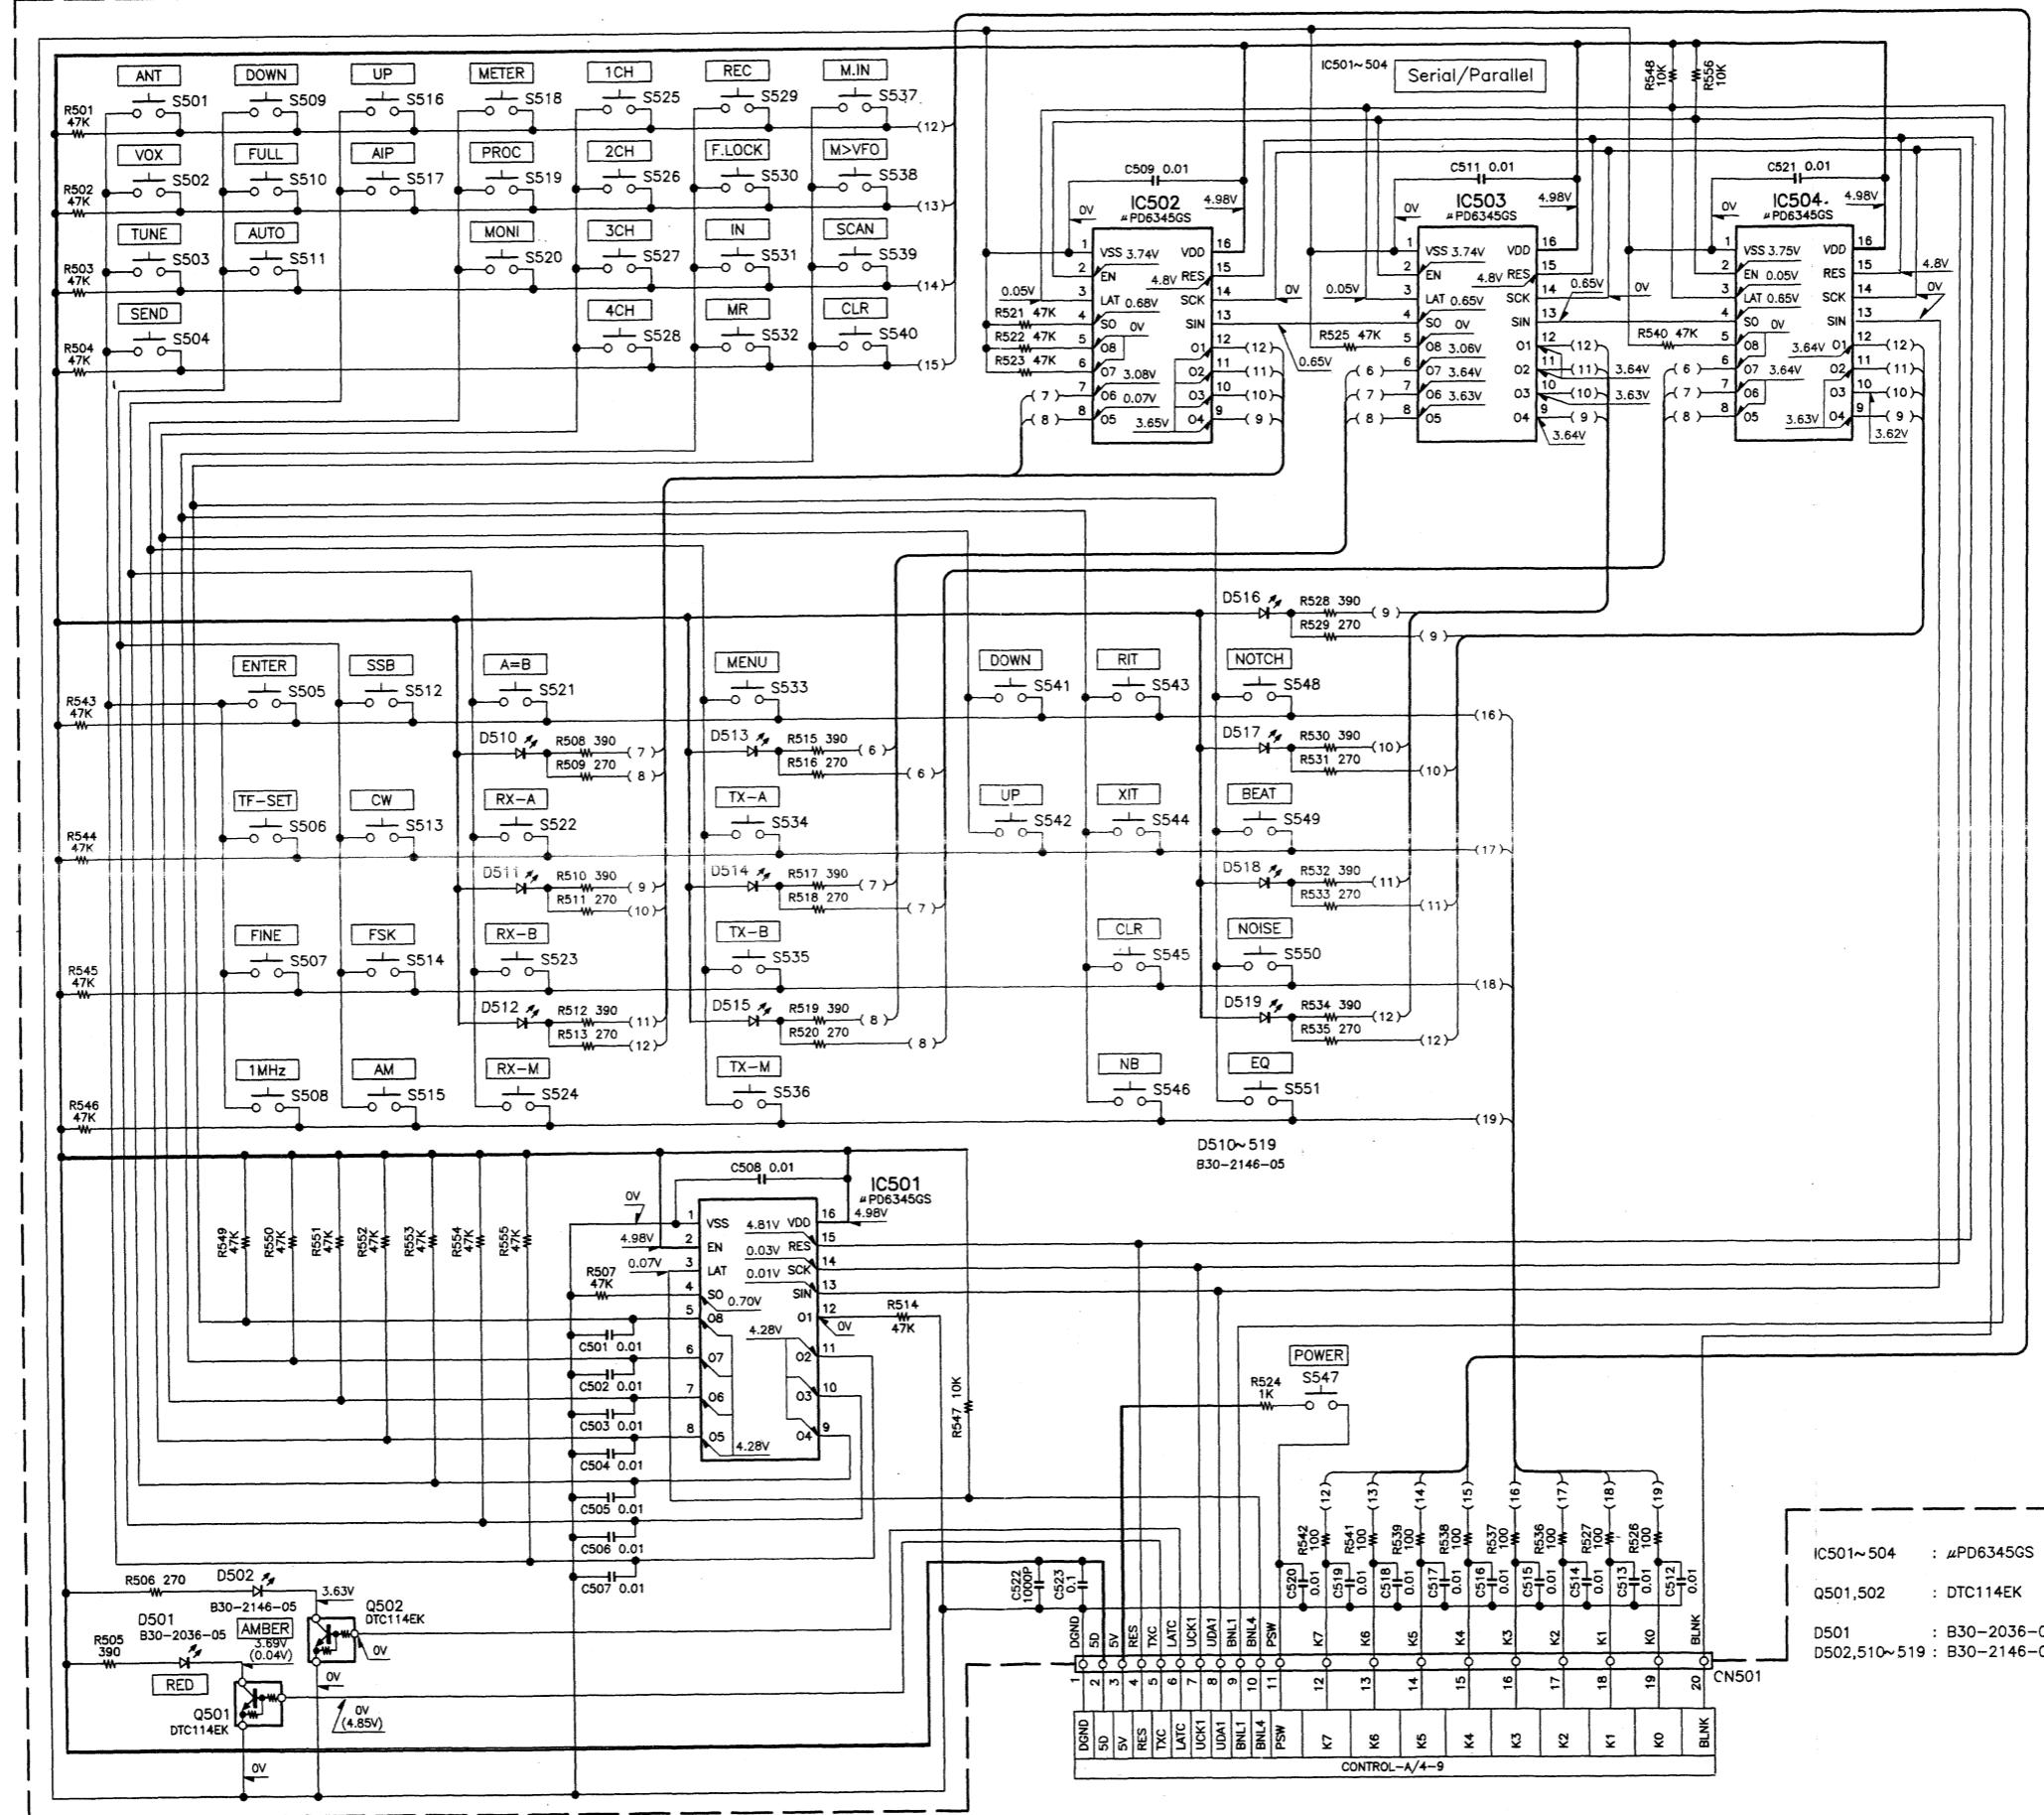

TS-870S PC BOARD VIEW

TX-RX UNIT (X57-4620-00) Component side view

| Ref. No. | Address |
|----------|---------|
| IC1 | 12G |
| IC2 | 9G |
| IC3 | 8K |
| IC4 | 13L |
| IC5 | 13N |
| IC6 | 13O |
| IC7 | 12J |
| IC9 | 8O |
| IC15 | 5D |
| IC16 | 4K |
| IC18 | 3I |
| IC23 | 5I |
| IC25 | 5K |
| IC26 | 3N |
| IC27 | 4M |
| IC29 | 2O |
| IC31 | 4O |
| IC33 | 4Q |
| IC34 | 2M |
| IC37 | 7N |
| IC38 | 7P |
| IC44 | 7O |
| Q1 | 9F |
| Q2 | 9O |
| Q4 | 9F |
| Q8 | 2E |
| Q9 | 3D |
| Q10 | 3D |
| Q12 | 2I |
| Q13 | 3H |
| Q14 | 2H |
| Q15 | 3G |
| Q16 | 4I |
| Q22 | 3P |
| Q23 | 4H |
| Q26 | 2Q |
| Q27 | 2P |
| D3 | 5R |
| D5 | 4E |
| D7 | 9J |

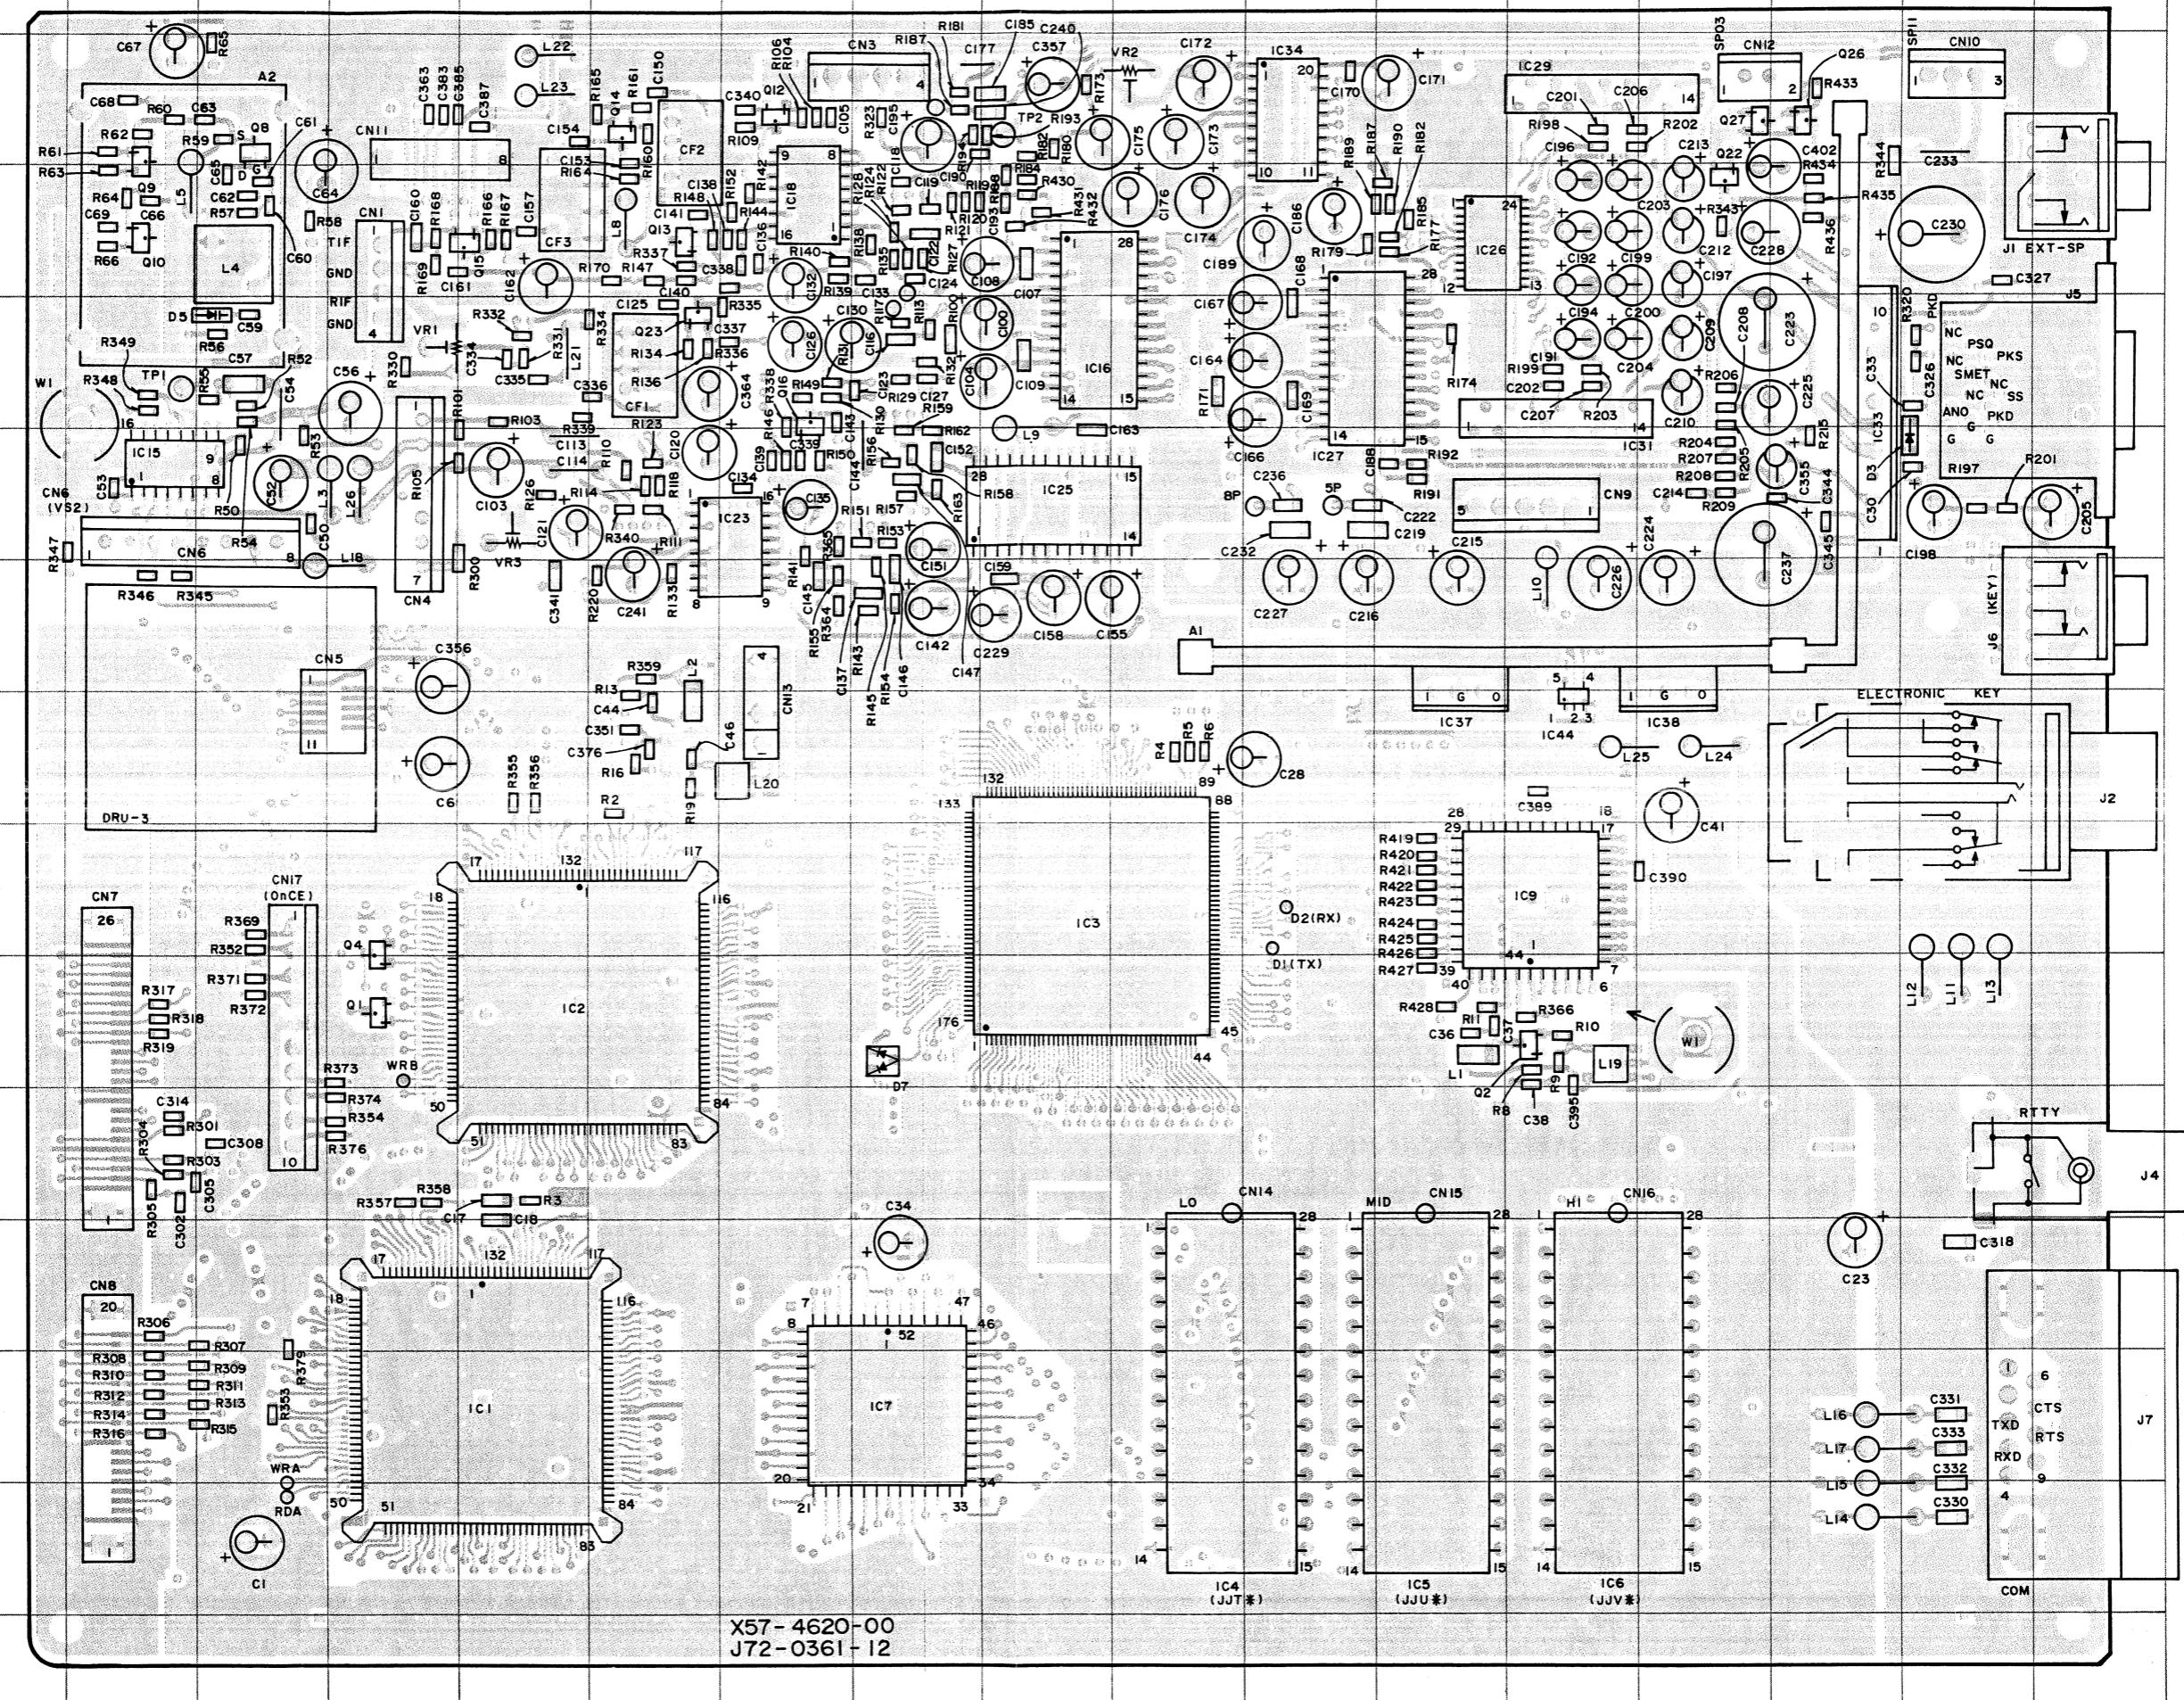

Component side

| | |
|-----------|---|
| Pattern 1 |  |
| Pattern 2 |  |
| Pattern 3 |  |
| Pattern 4 |  |

Foil side


TX-RX UNIT (X57-4620-00) Foil side view


| Ref. No. | Address |
|----------|---------|
| IC17 | 3M |
| IC19 | 4M |
| IC20 | 3N |
| IC21 | 5M |
| IC22 | 5O |
| IC24 | 6M |
| IC28 | 3I |
| IC30 | 4I |
| IC35 | 3L |
| IC36 | 2L |
| IC39 | 5J |
| IC40 | 5J |
| IC41 | 3I |
| IC42 | 4I |
| IC43 | 4P |
| Q3 | 7O |
| Q5 | 5R |
| Q6 | 4R |
| Q7 | 4R |
| Q17 | 5E |
| Q25 | 2F |
| D1 | 8O |
| D2 | 11O |
| D4 | 11E |
| D8 | 3F |

Component side

| | |
|-----------|---|
| Pattern 1 |  |
| Pattern 2 |  |
| Pattern 3 |  |
| Pattern 4 |  |

Foil side

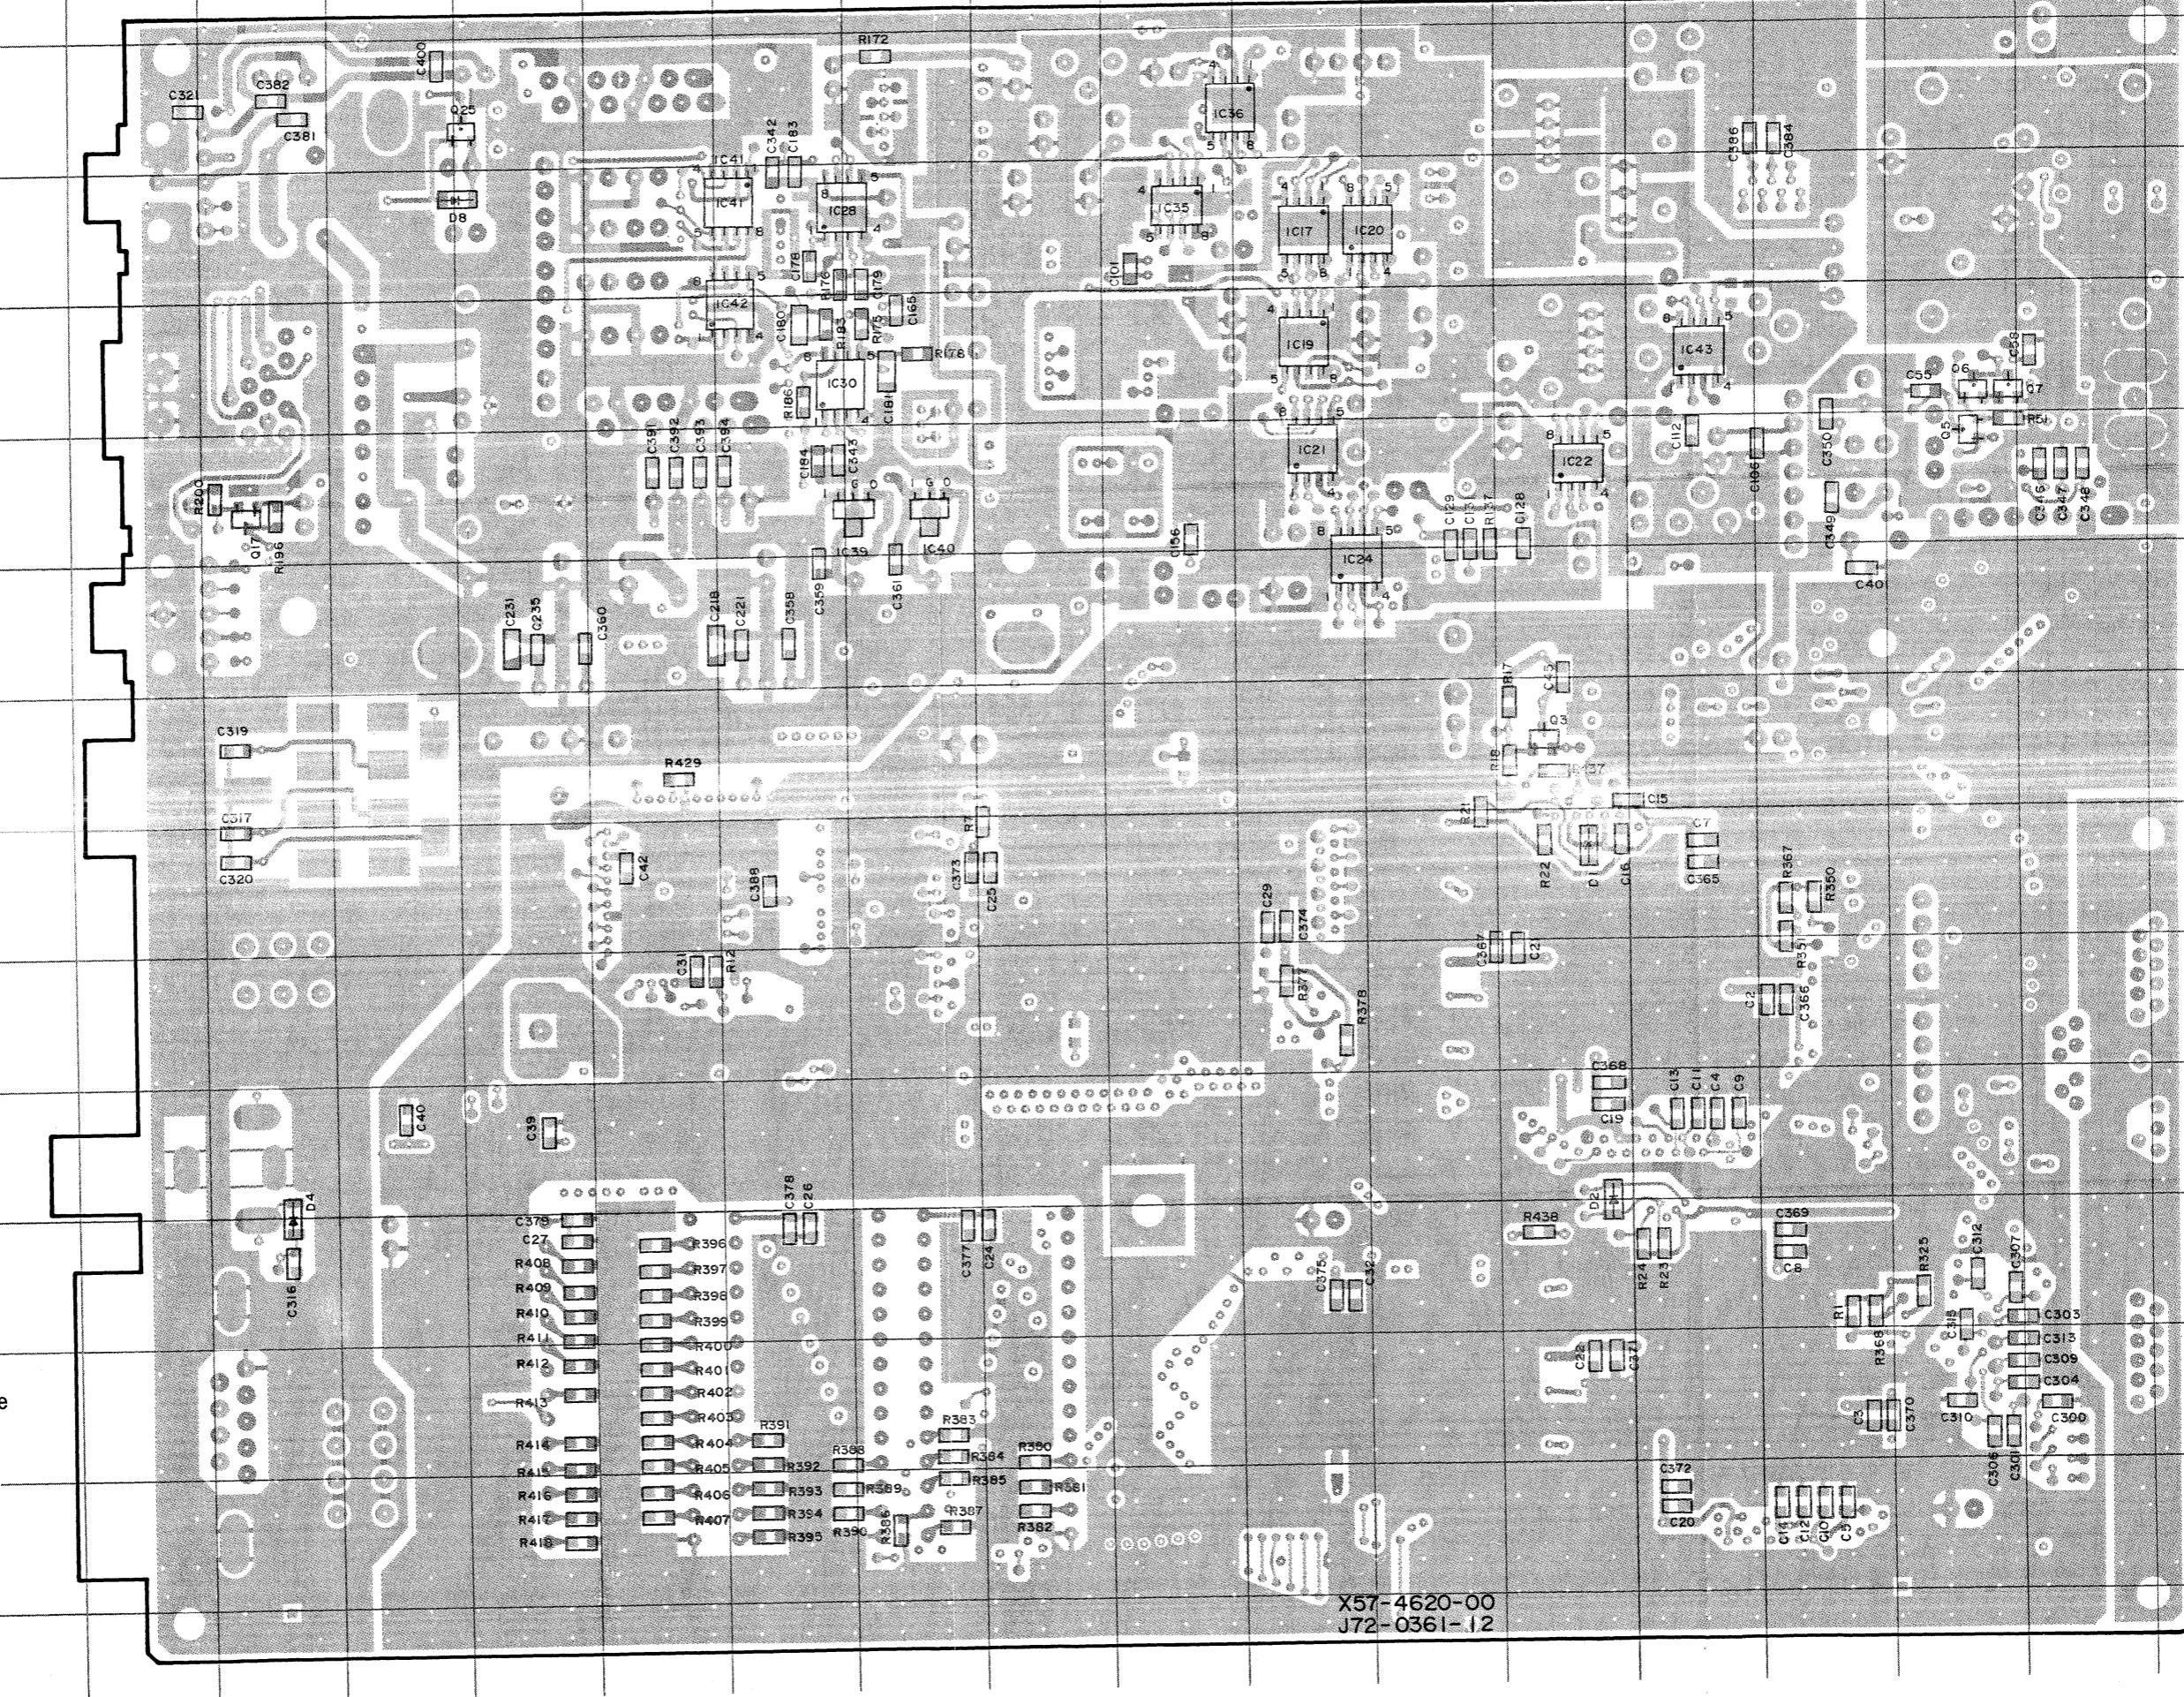


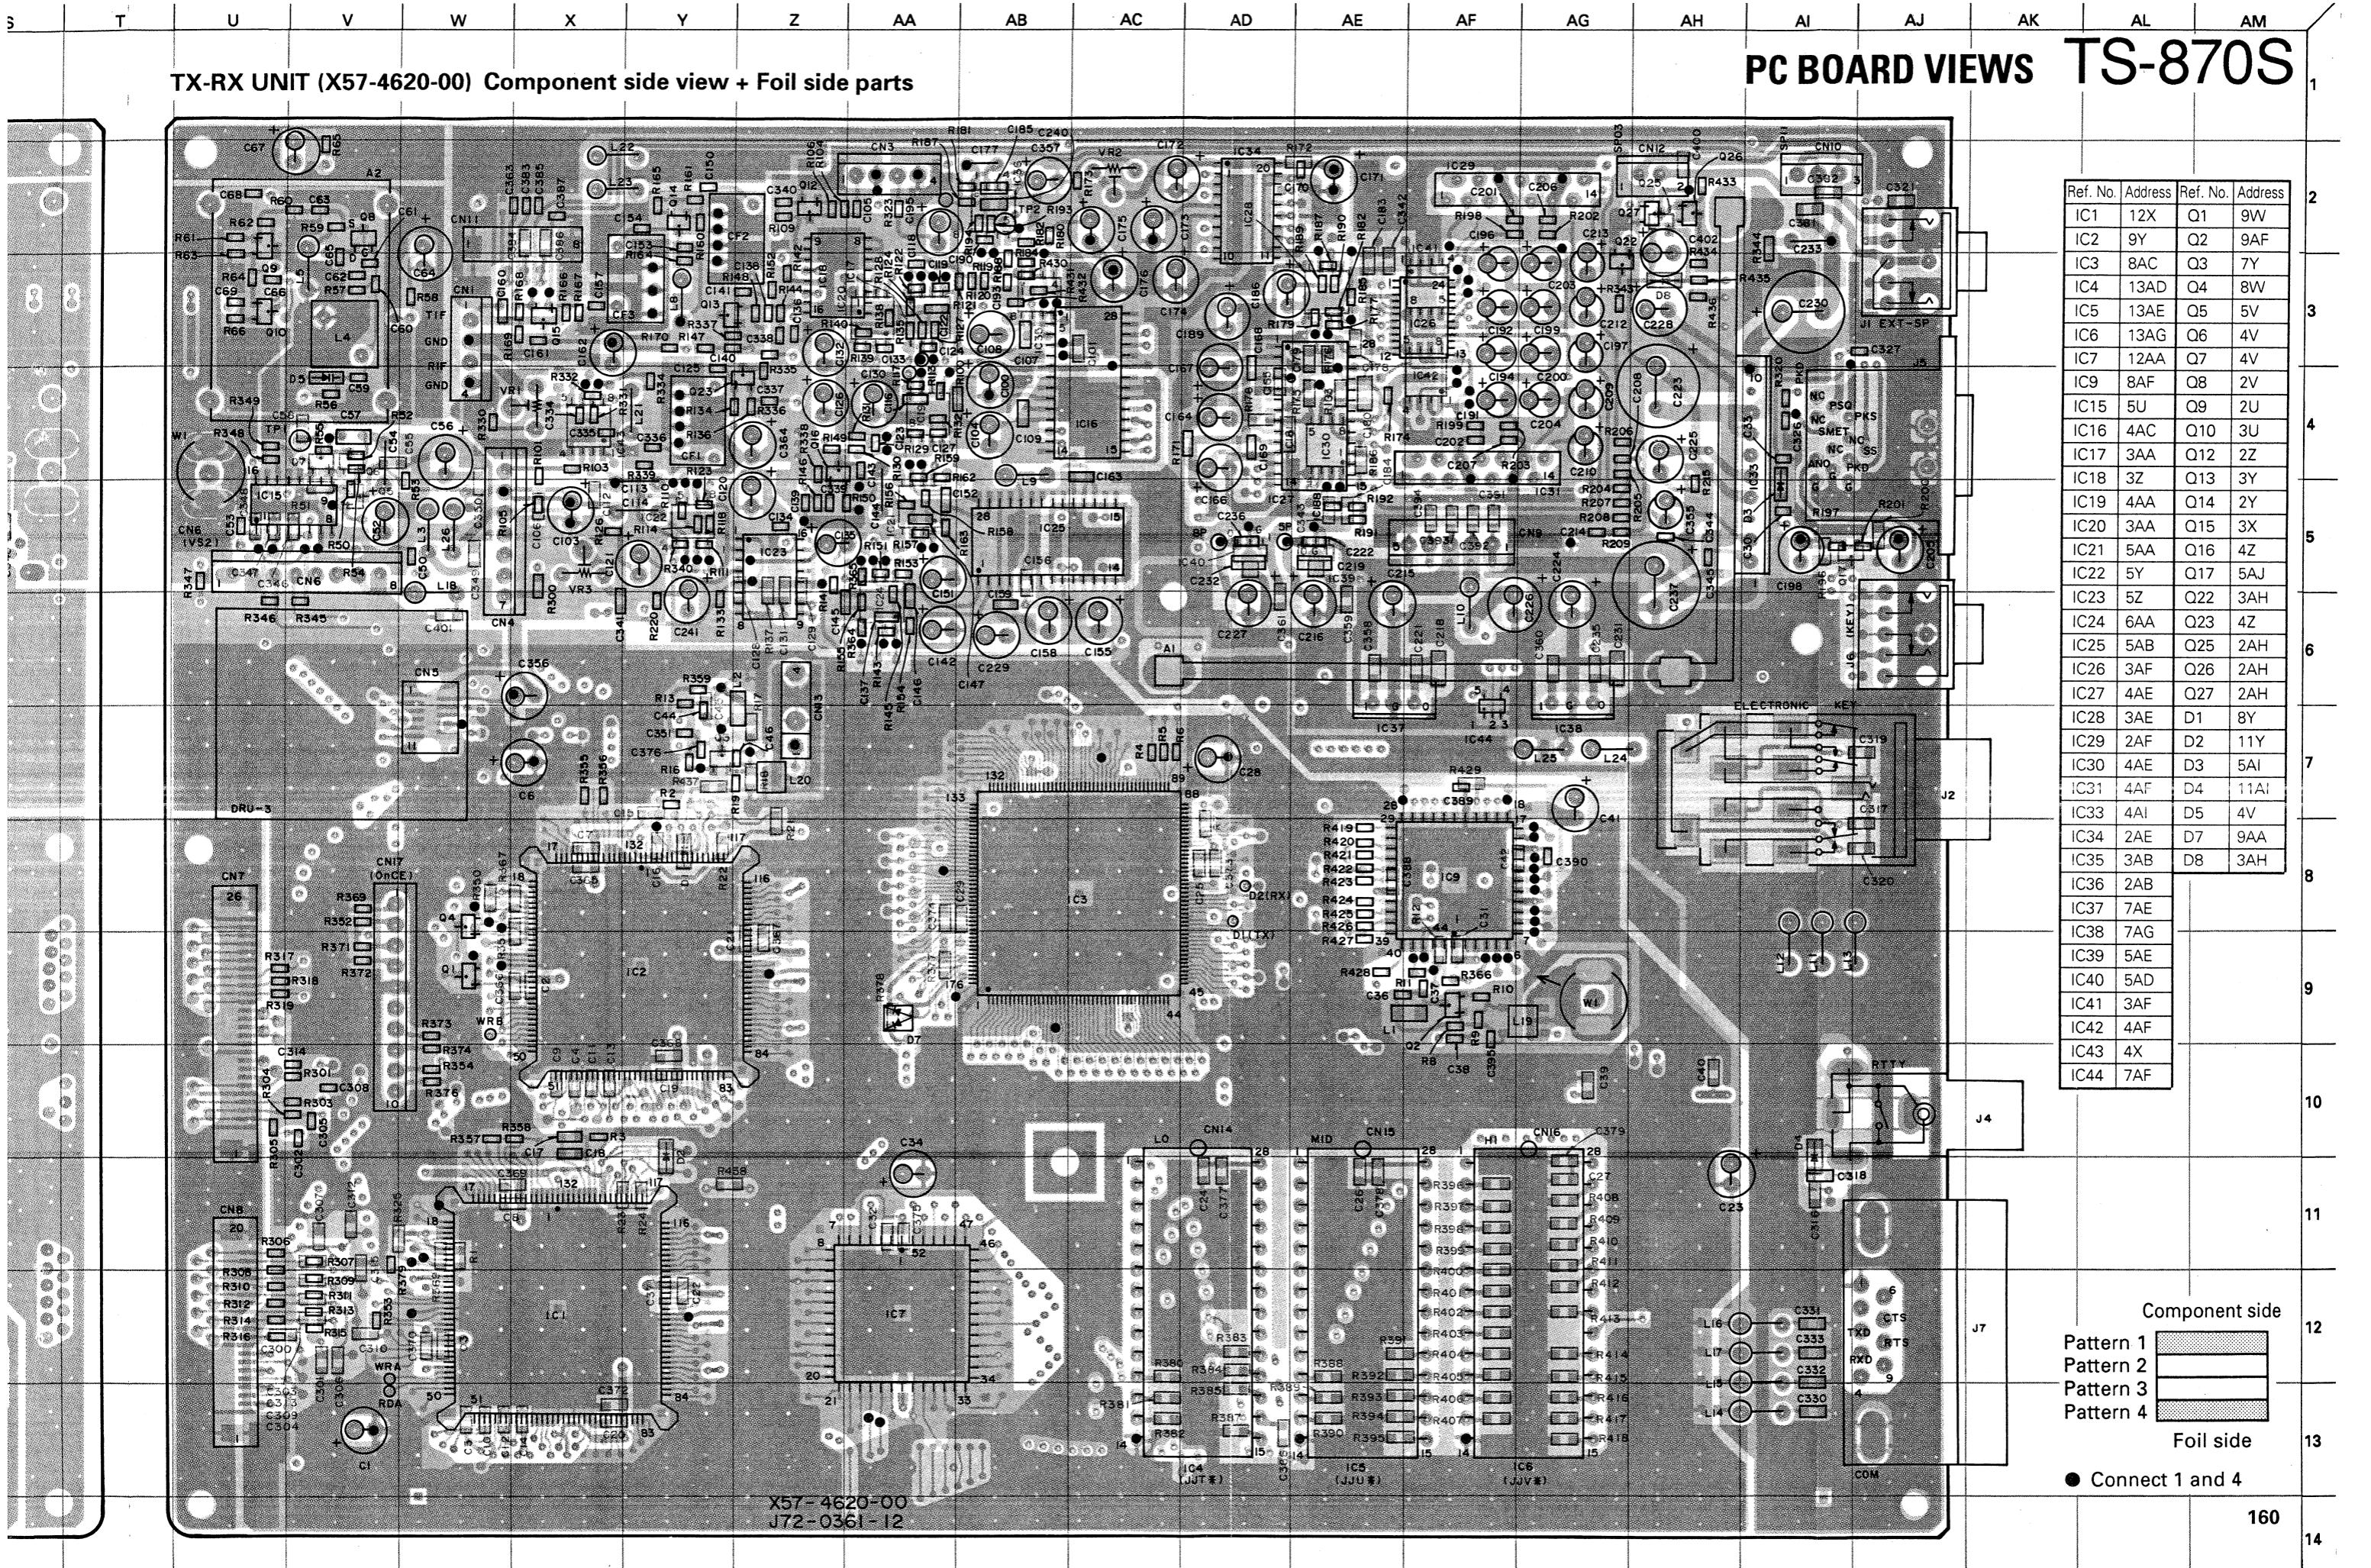

TS-870S CIRCUIT DIAGRAM

DTA143EK 2SC2412K
DTC124EK 2SC2712
DTC124XK 2SC2714
DTC143EK 2SC3324


MB86001PF




2SK210



MC74HC4052F
MC74HC4053F



UPC7805H




PCM69AU




NJM78L05UA
NJM78L08UA




M62363FP



TC7S04F




AK4318-VS
AK5340-VS




NJM2100M
NJM3404AM
NJM4560M
NJM5532M




7032LC44JLQA




AD822AR



MCM56824AFN25




LA4422




27C256PCJJTC
27C256PCJJUC
27C256PCJJVC




M51131L




DSP56002FC40



TX-RX UNIT (X57-4620-00) (1/2)

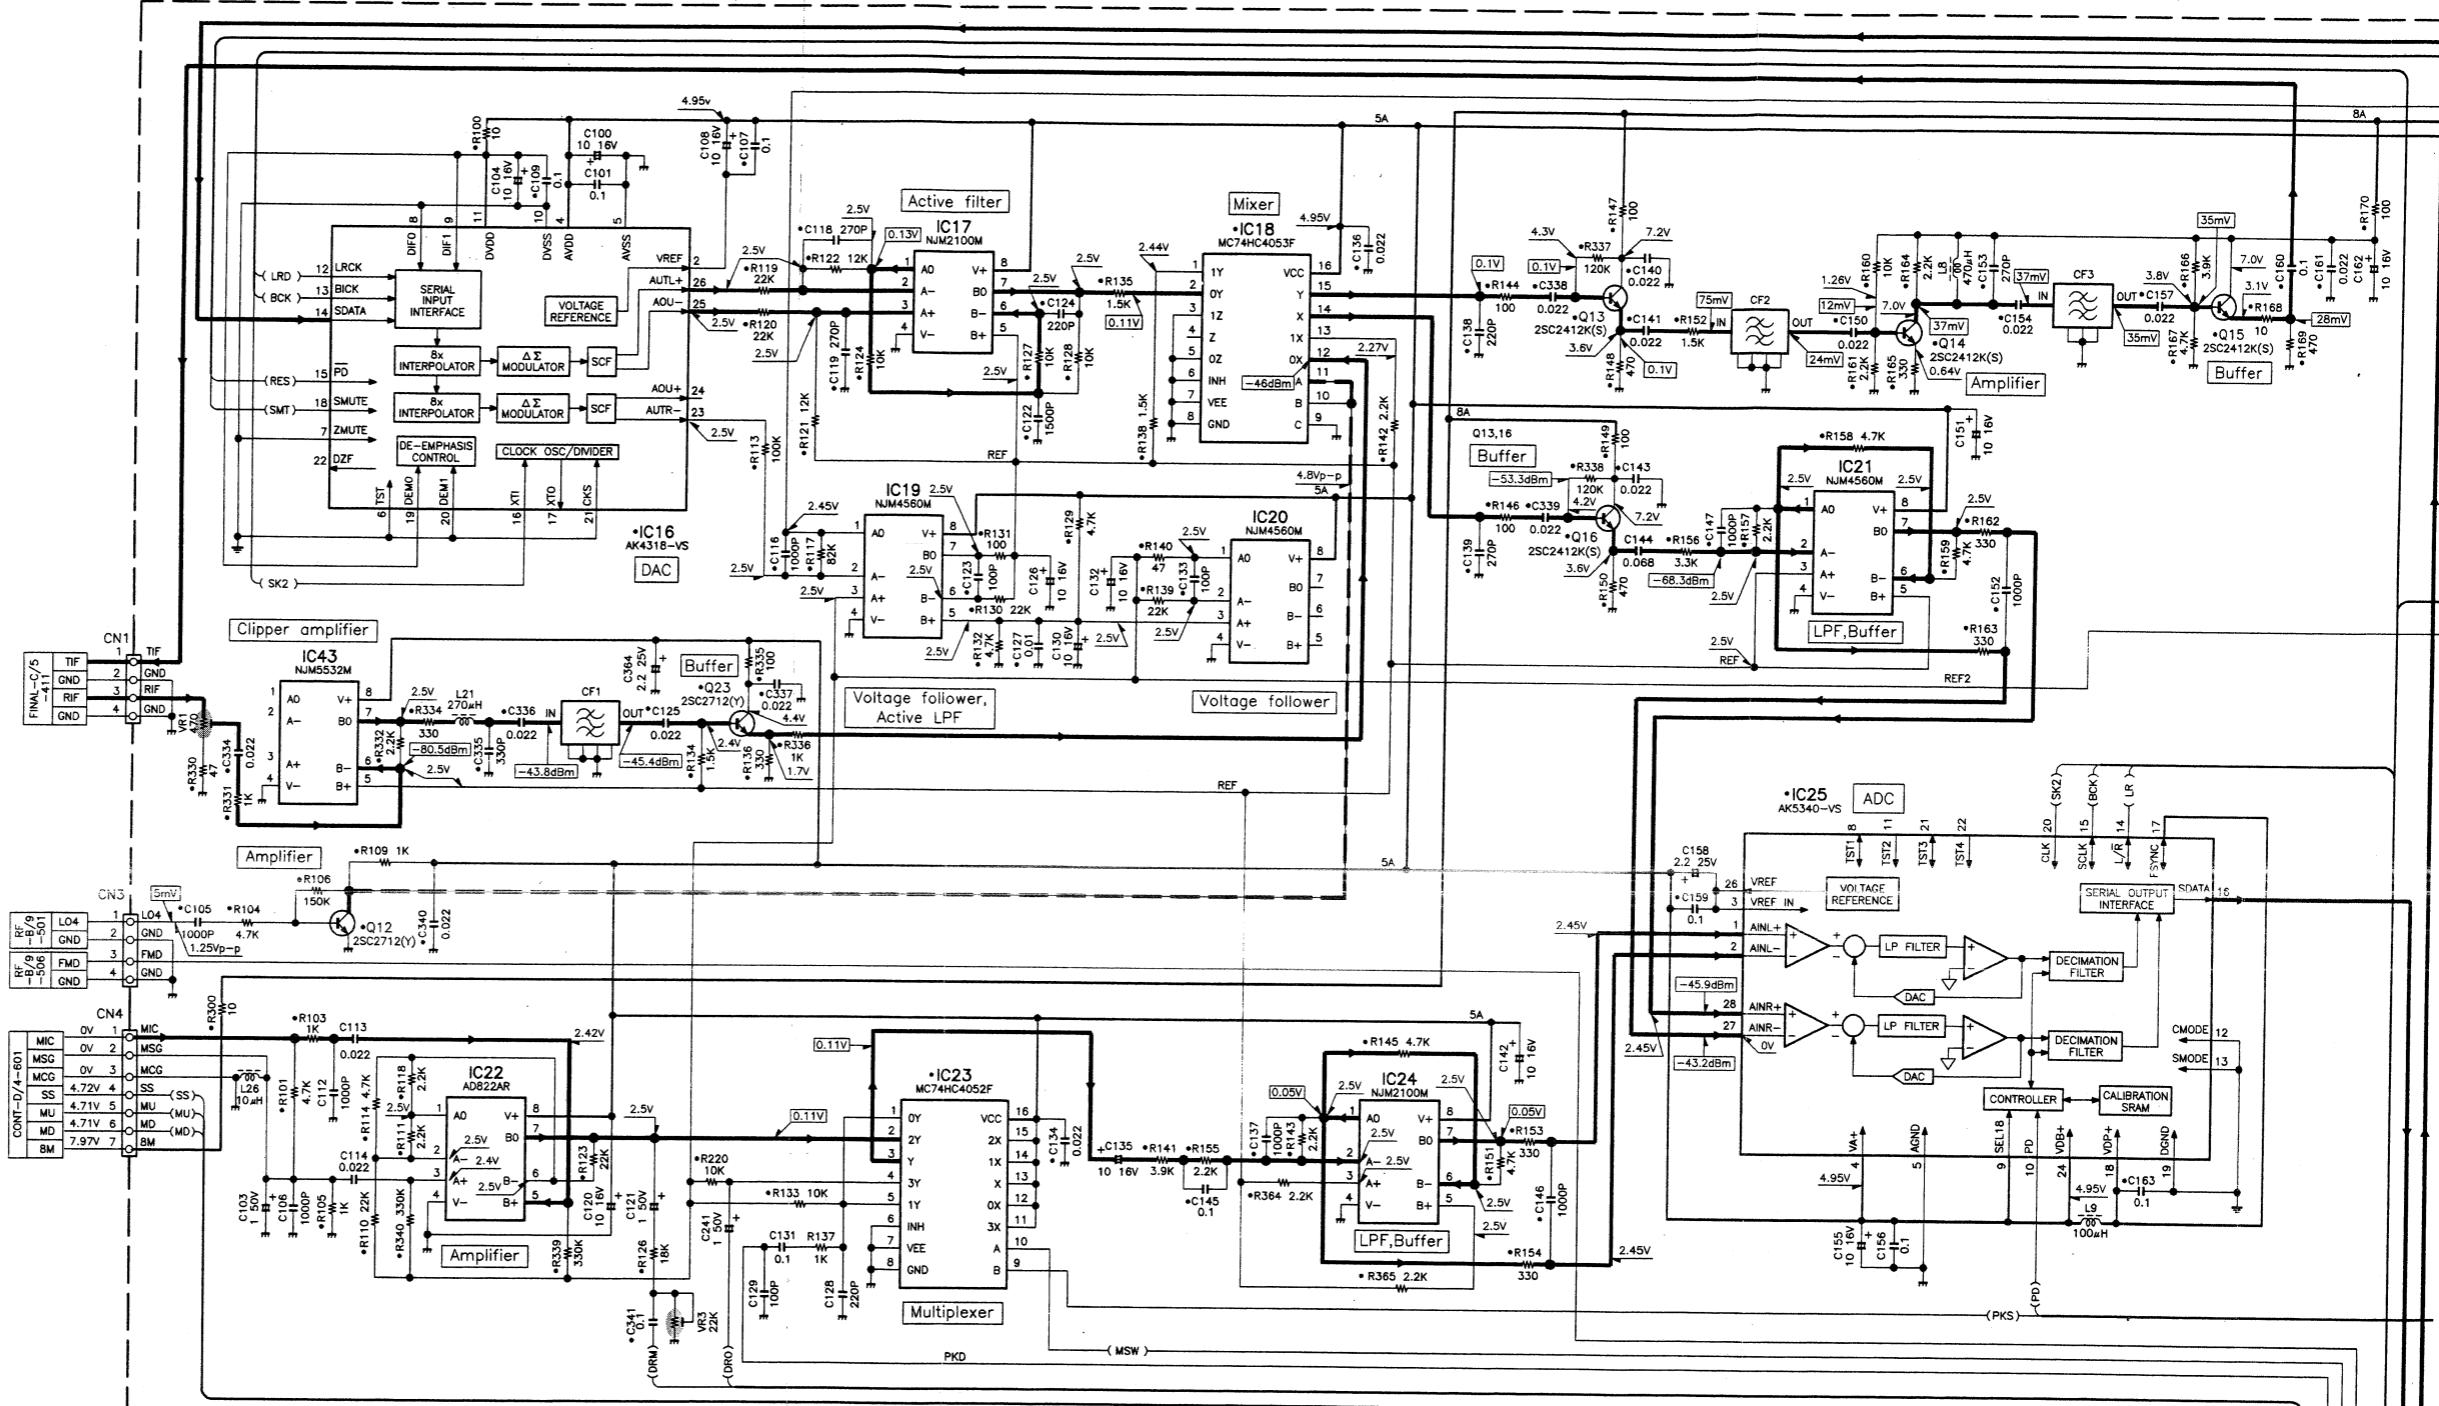


TX-RX UNIT (X57-4620-00) (1/2)

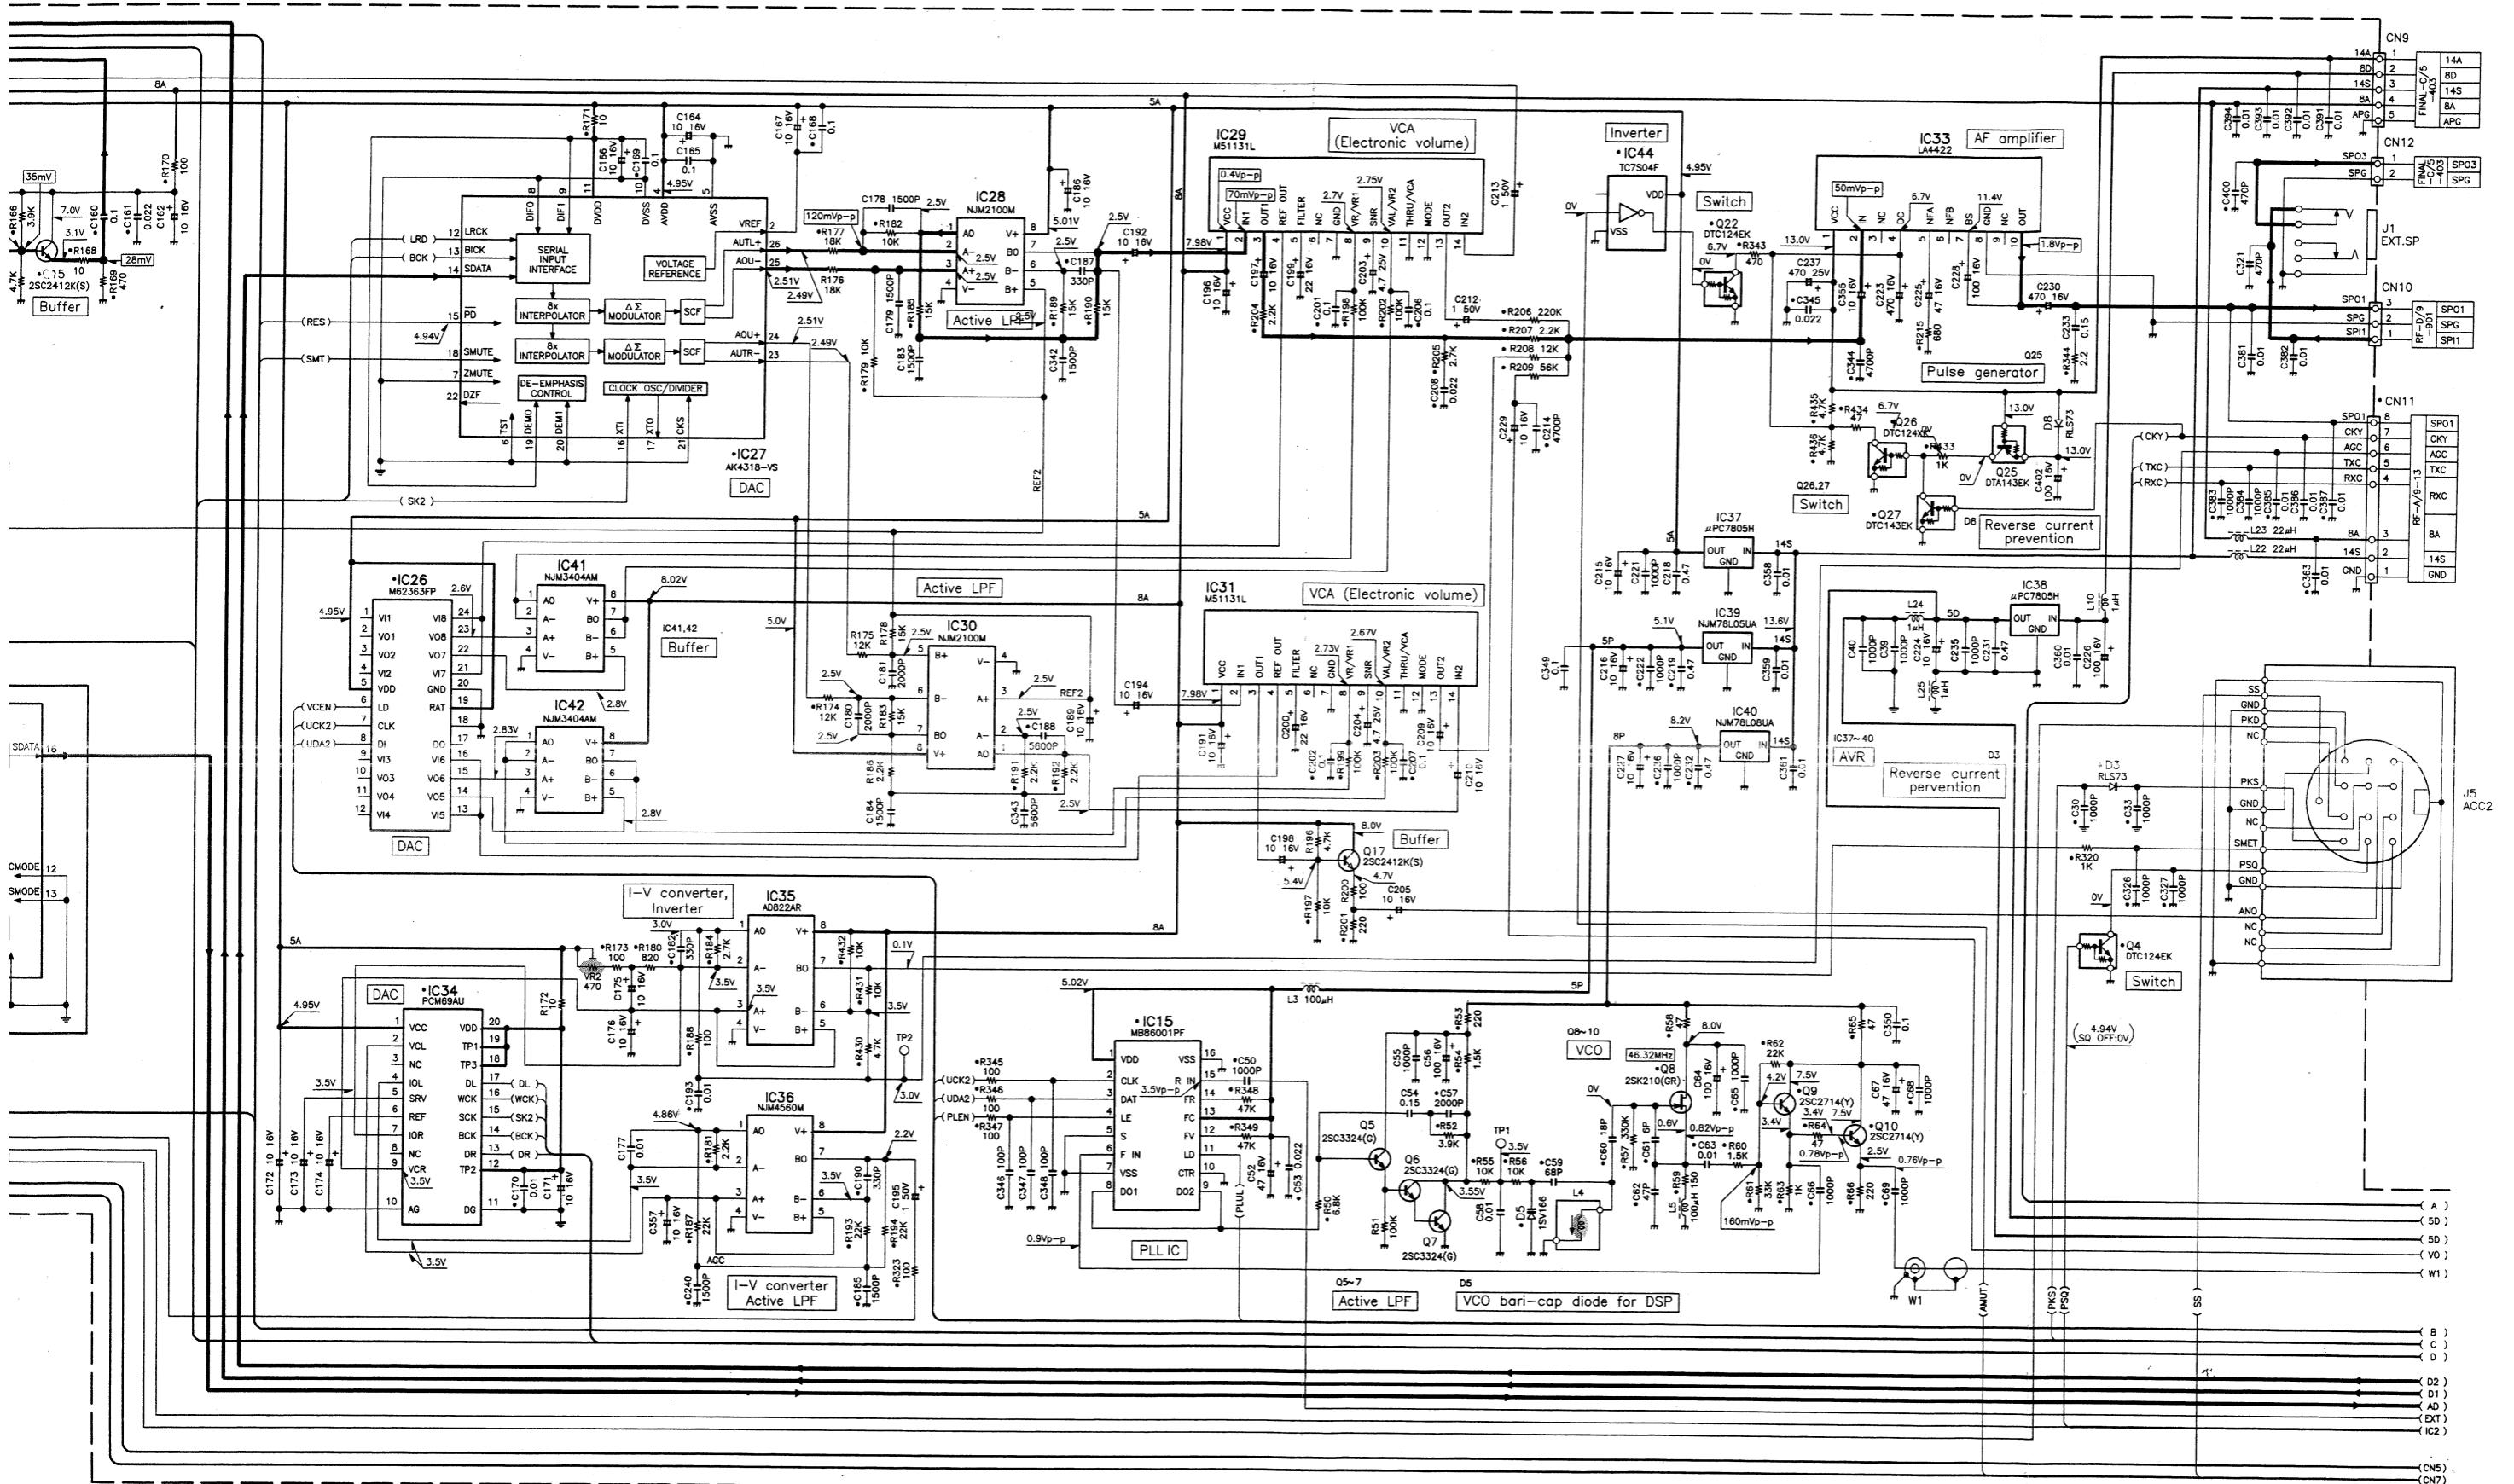


TX-RX UNIT (X57-4620-00) (2/2)

TX-RX UNIT (X57-4620-00) (2/2)

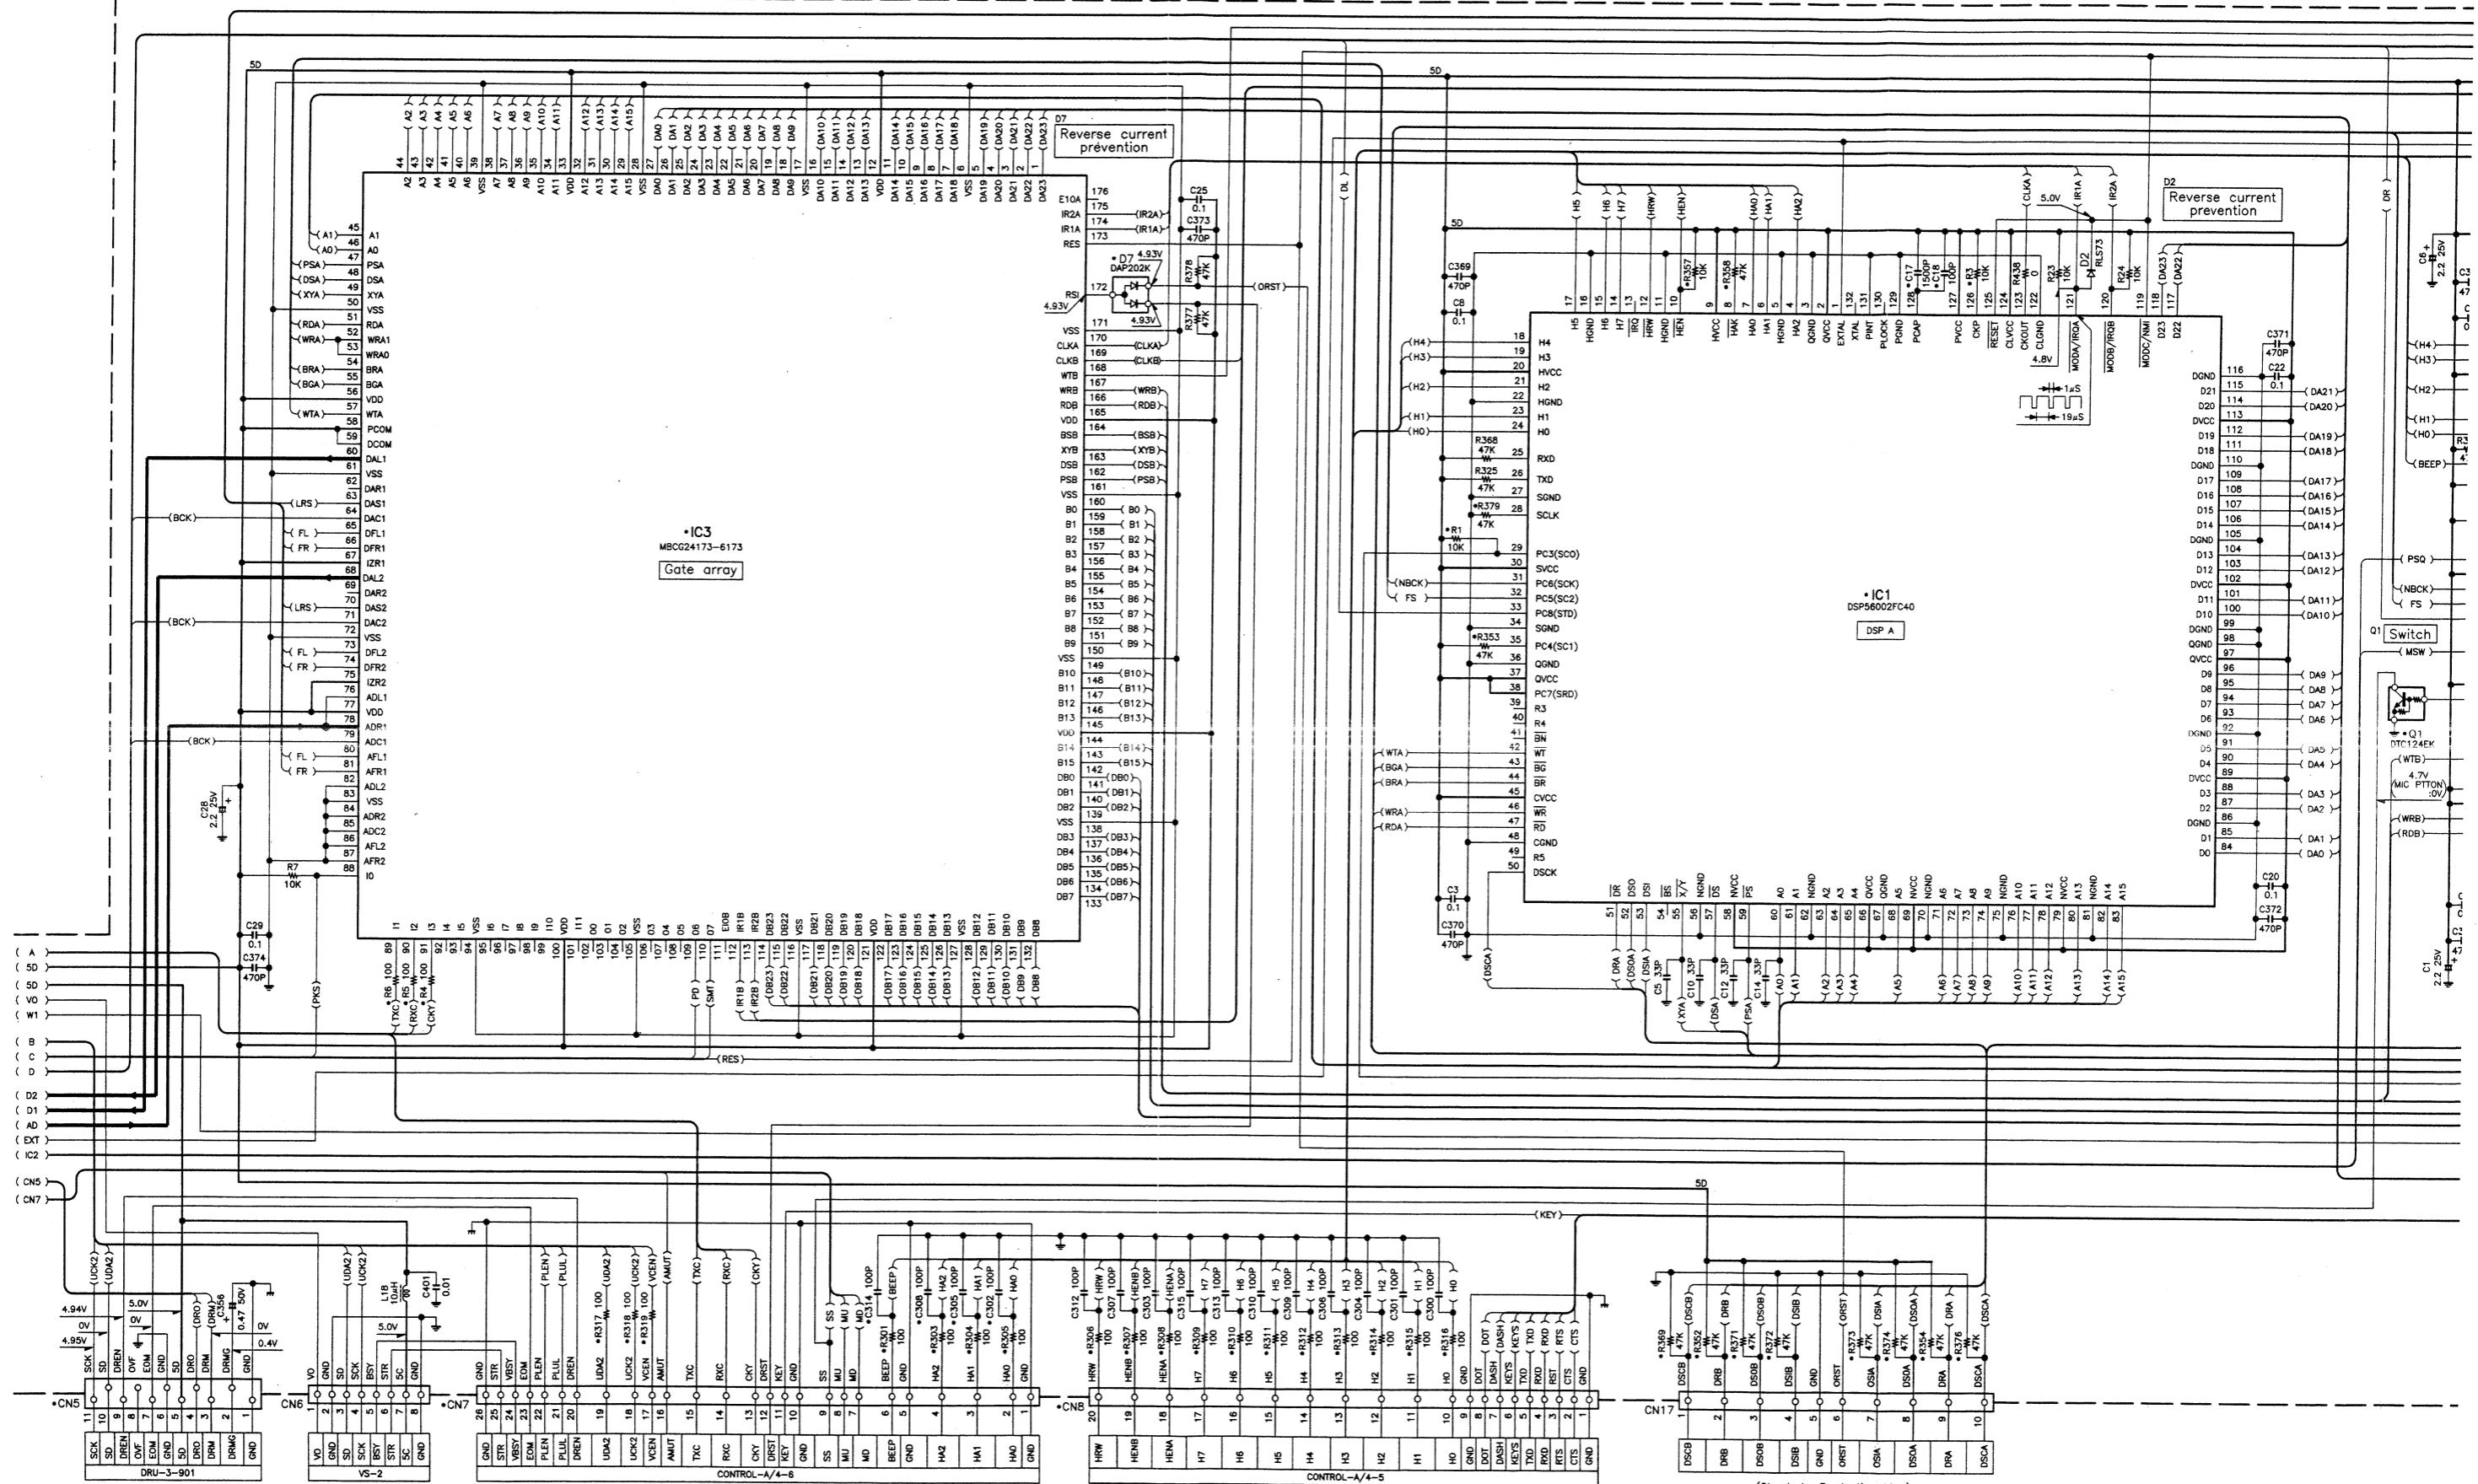


TS-870S PC BOARD VIEWS


RF UNIT (X44-3210-00) (D/9)
Component side view

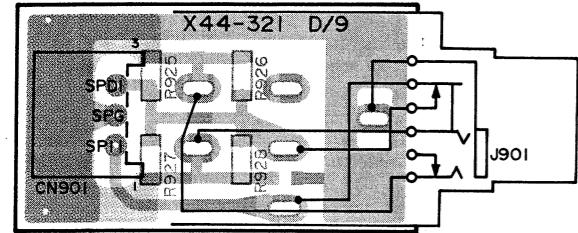


RF UNIT (X44-3210-00) (D/9)
Foil side view

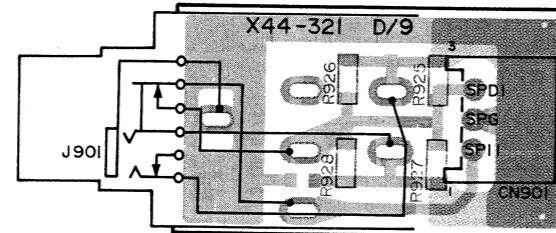


RF UNIT (X44-3210-00) (E/9)
Component side view

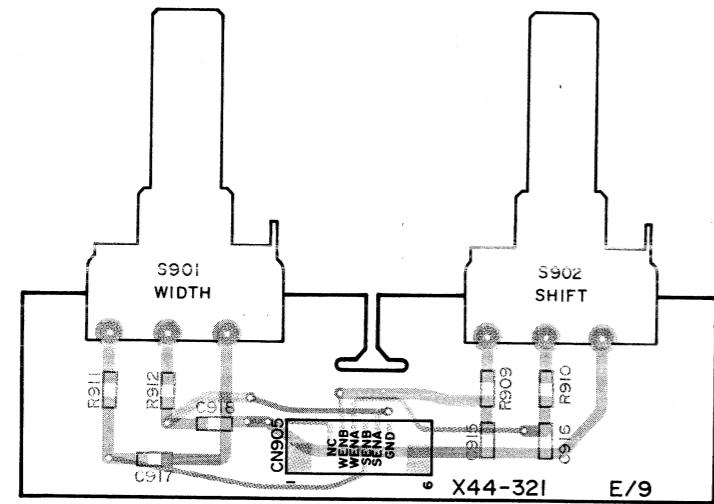


RF UNIT (X44-3210-00) (E/9)
Foil side view

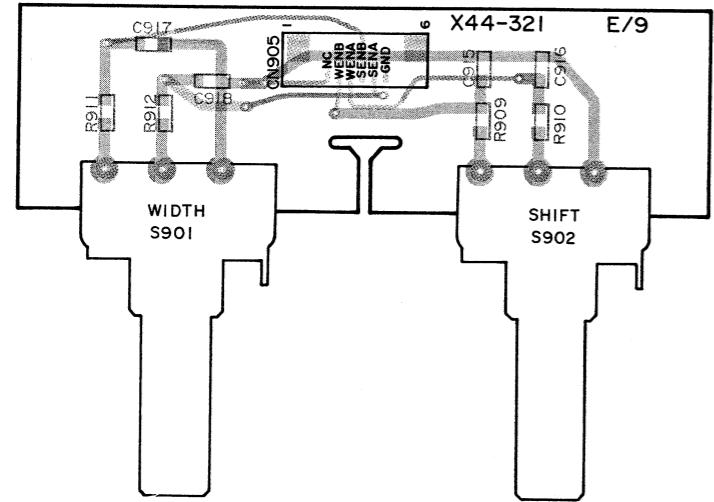


RF UNIT (X44-3210-00) (F/9)
Component side view

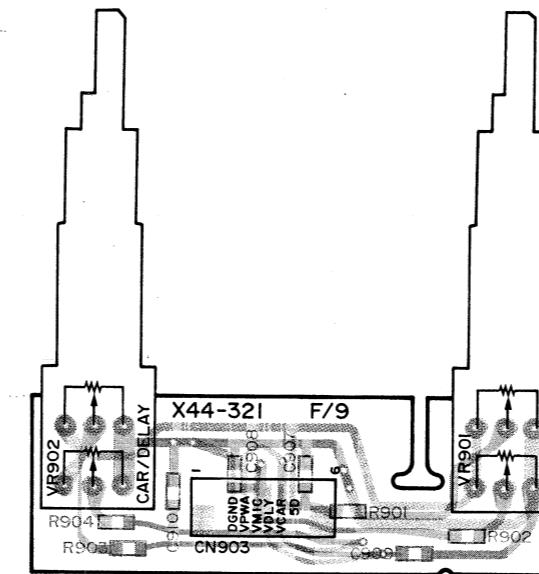


RF UNIT (X44-3210-00) (F/9)
Foil side view

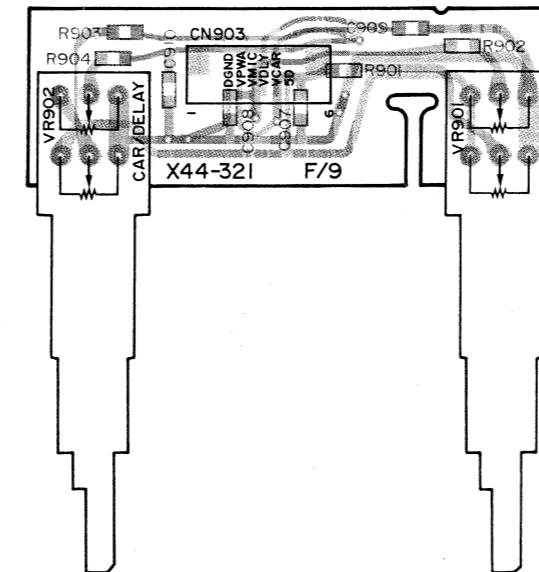


RF UNIT (X44-3210-00) (G/9)
Component side view

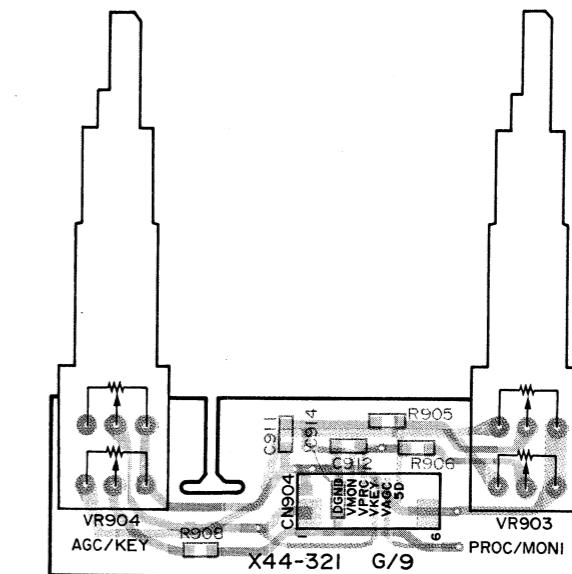


RF UNIT (X44-3210-00) (G/9)
Foil side view

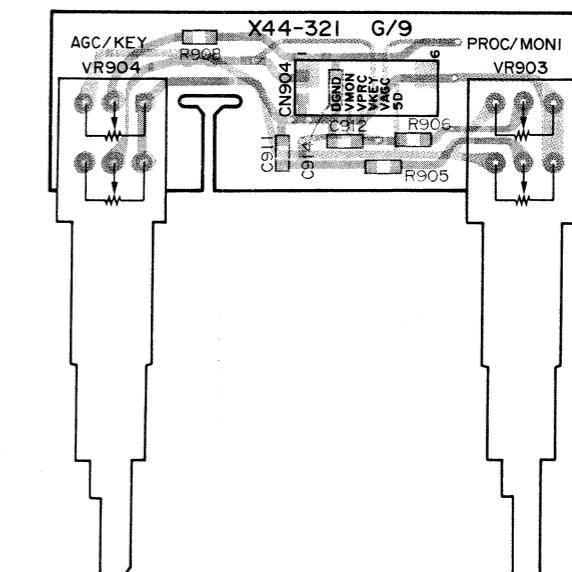


RF UNIT (X44-3210-00) (H/9)
Component side view

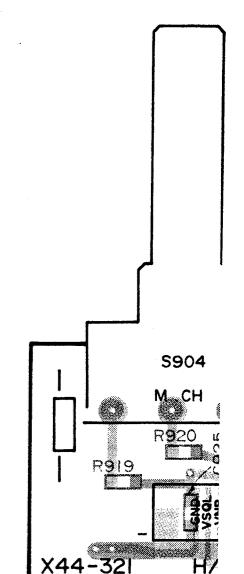


RF UNIT (X44-3210-00) (H/9)
Foil side view

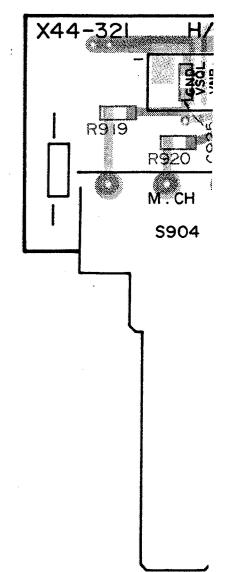


RF UNIT (X44-3210-00) (H/9) Component side view

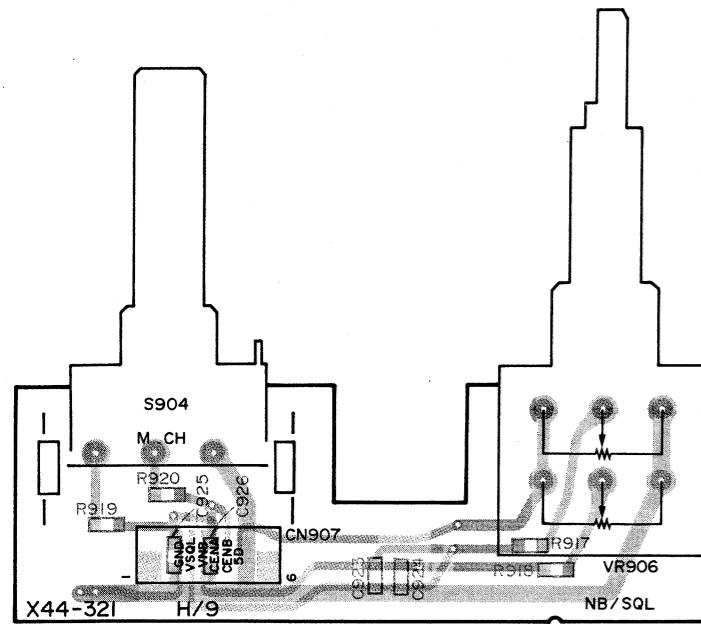


RF UNIT (X44-3210-00) (I/9)
Component side view

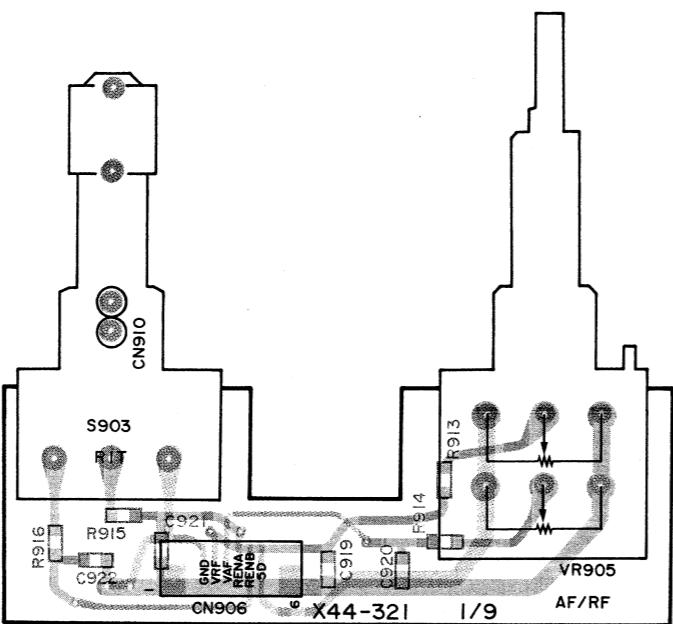

**RF UNIT (X44-3210-00) (H/9)
Foil side view**

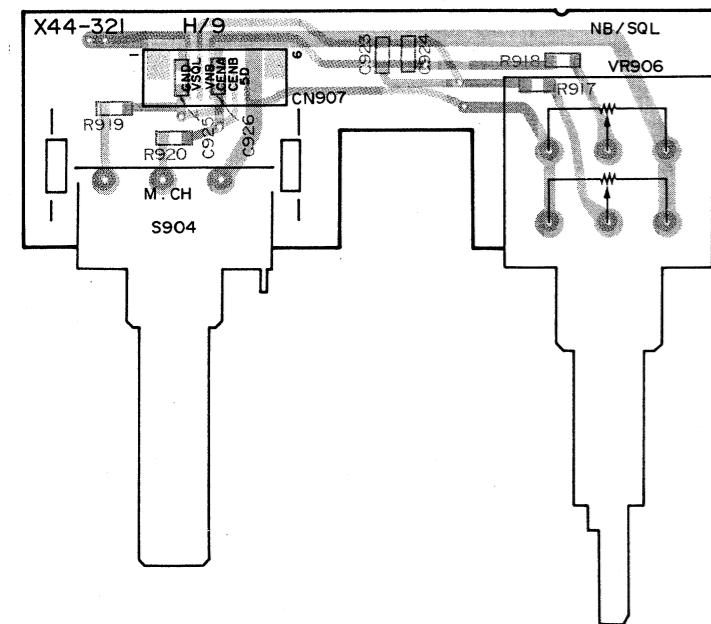


RF UNIT (X44-3210-00) (I/9)
Foil side view

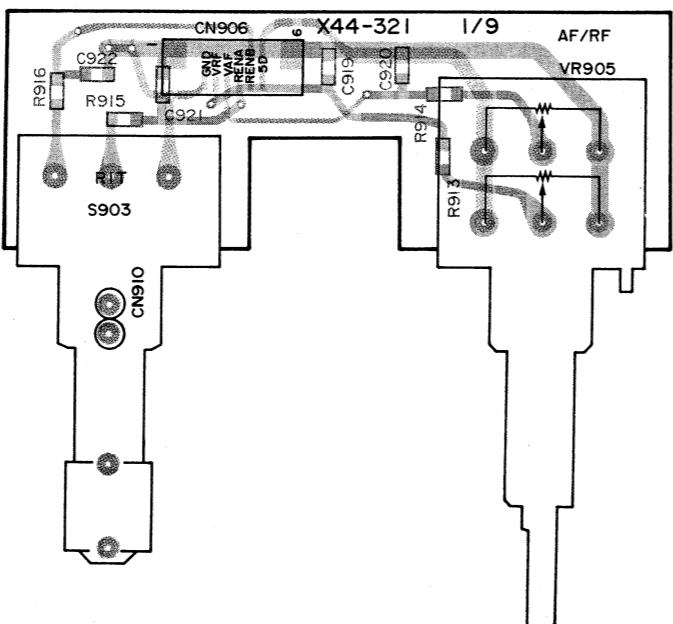

■ Component side
■ Foil side

FINAL UNIT (X45-351X-XX) (C/5) : CONNECTION Component side view

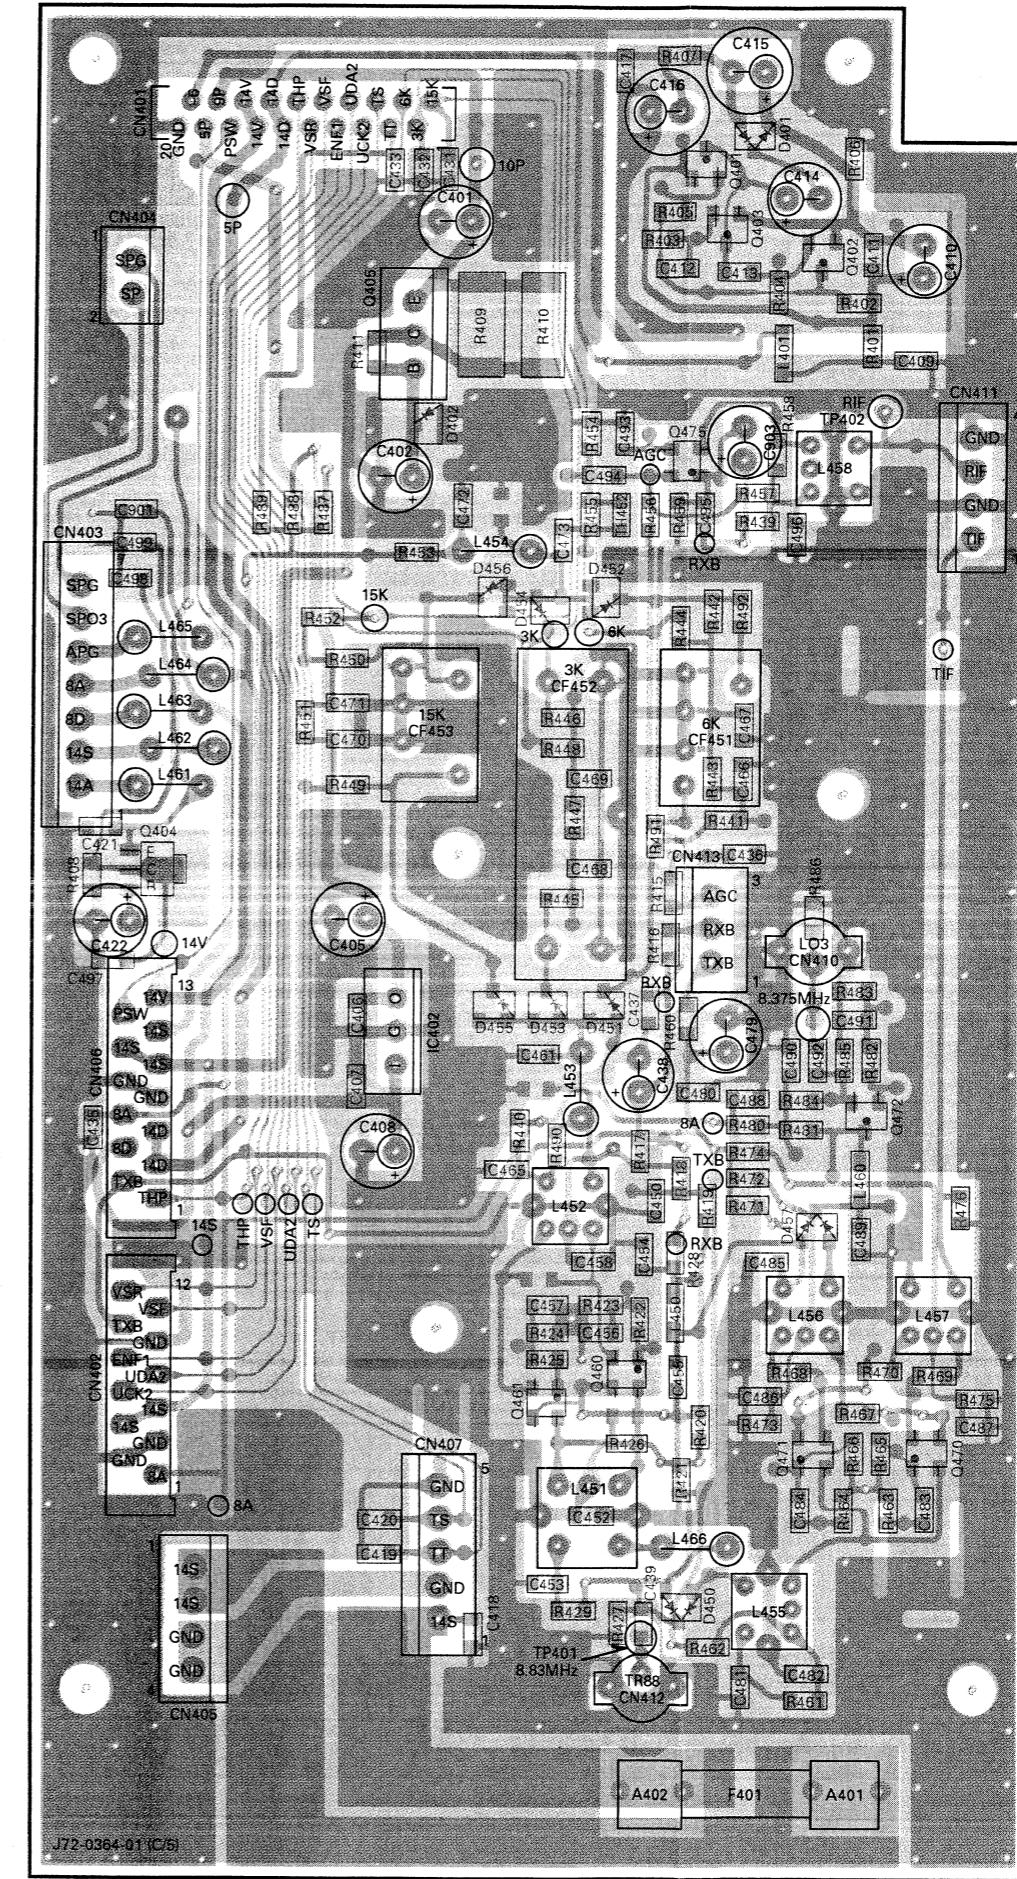

A

B

C

D

E

F

FINAL UNIT (X45-351X-XX) (C/5)
: CONNECTION Foil side view
0-00 : K,P,M,M2,X
2-71 : E,E2,E3,E9

PC BOARD VIEW

TS-870S


2SA1162
2SC2712




2SD1406





2SD1624



3SK131



UPC7805H

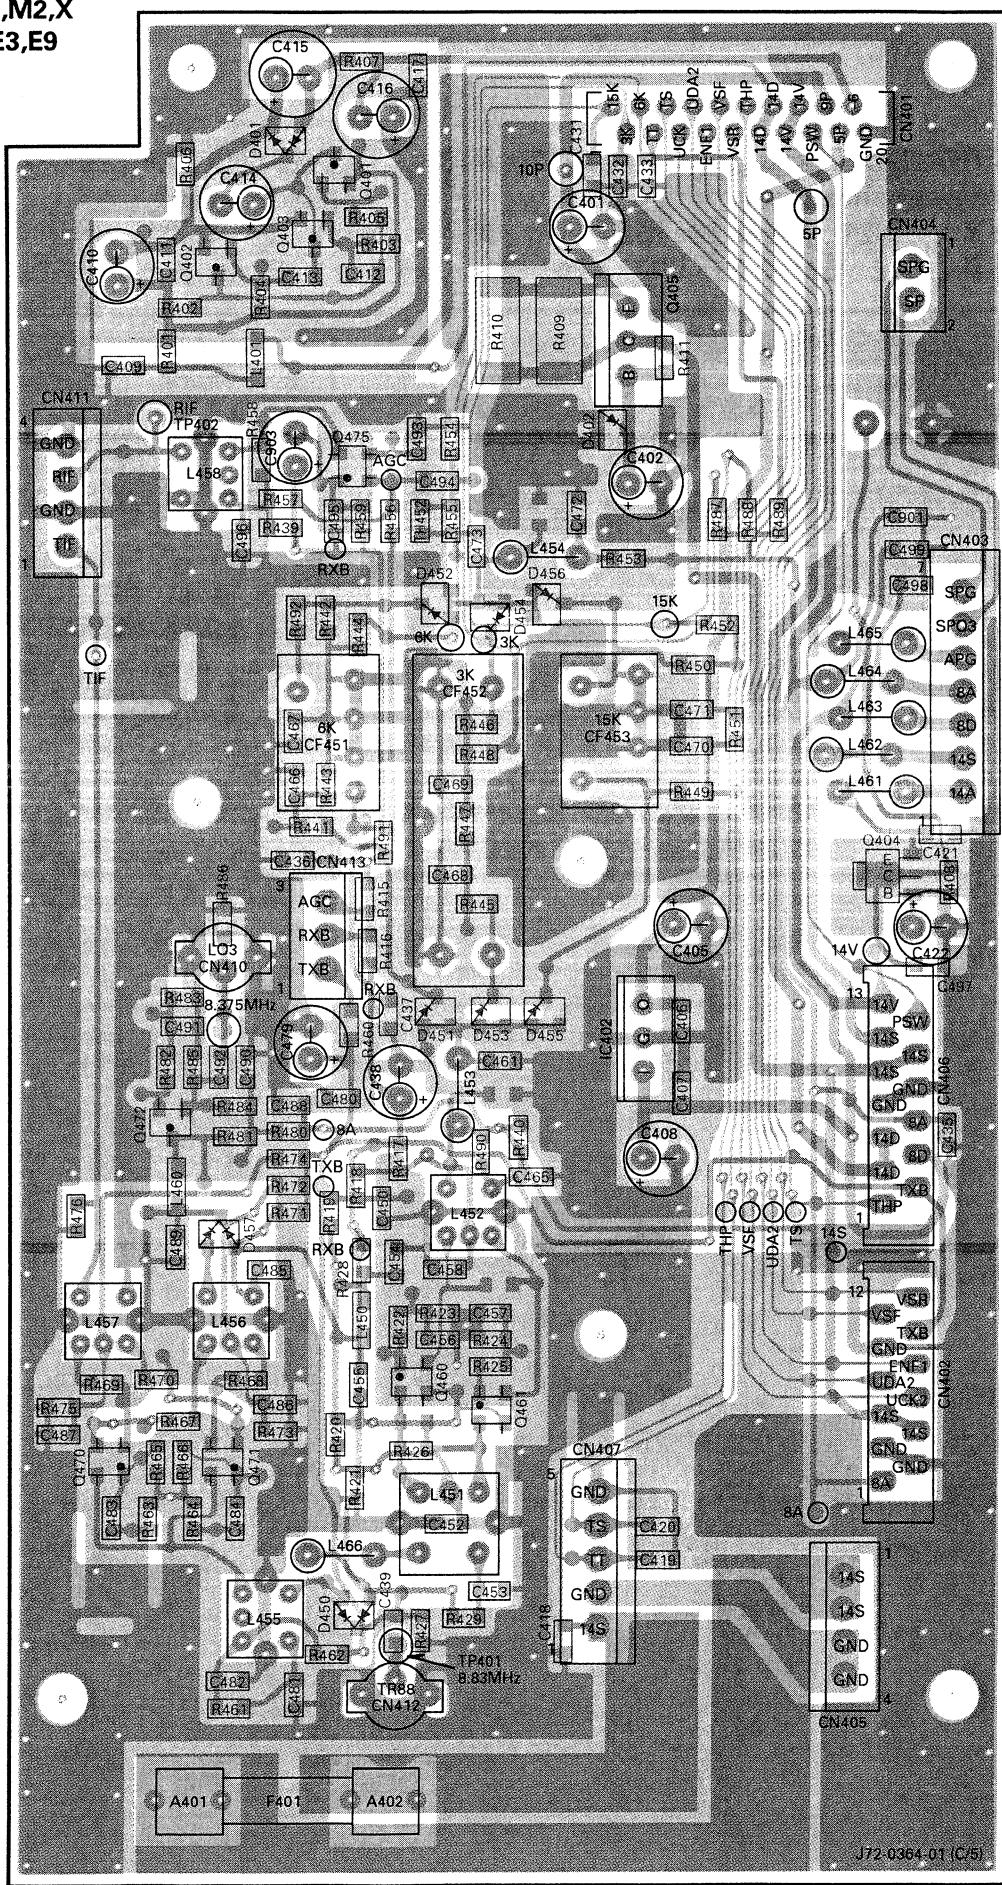

Component side
Foil side

J72-0364-01 (C/5)


A B C D E F

TS-870S PC BOARD VIEWS

CONTROL UNIT (X53-356X-XX) (D/4) : MIC

Component side view


0-11 : K,P 0-21 : M 0-22 : M2 0-71 : X
2-71 : E 2-72 : E2 2-73 : E3 2-74 : E9

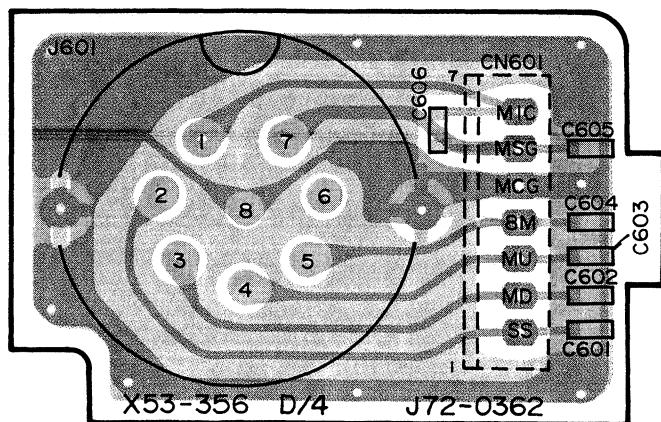


CONTROL UNIT (X53-356X-XX) (D/4) : MIC

Foil side view


0-11 : K,P 0-21 : M 0-22 : M2 0-71 : X
2-71 : E 2-72 : E2 2-73 : E3 2-74 : E9

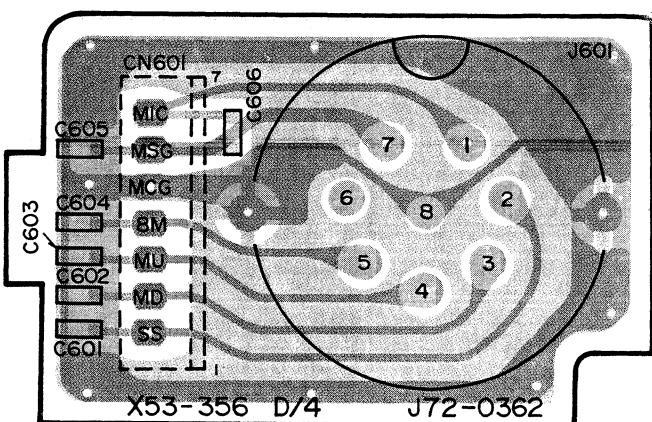

■ Component side
■ Foil side

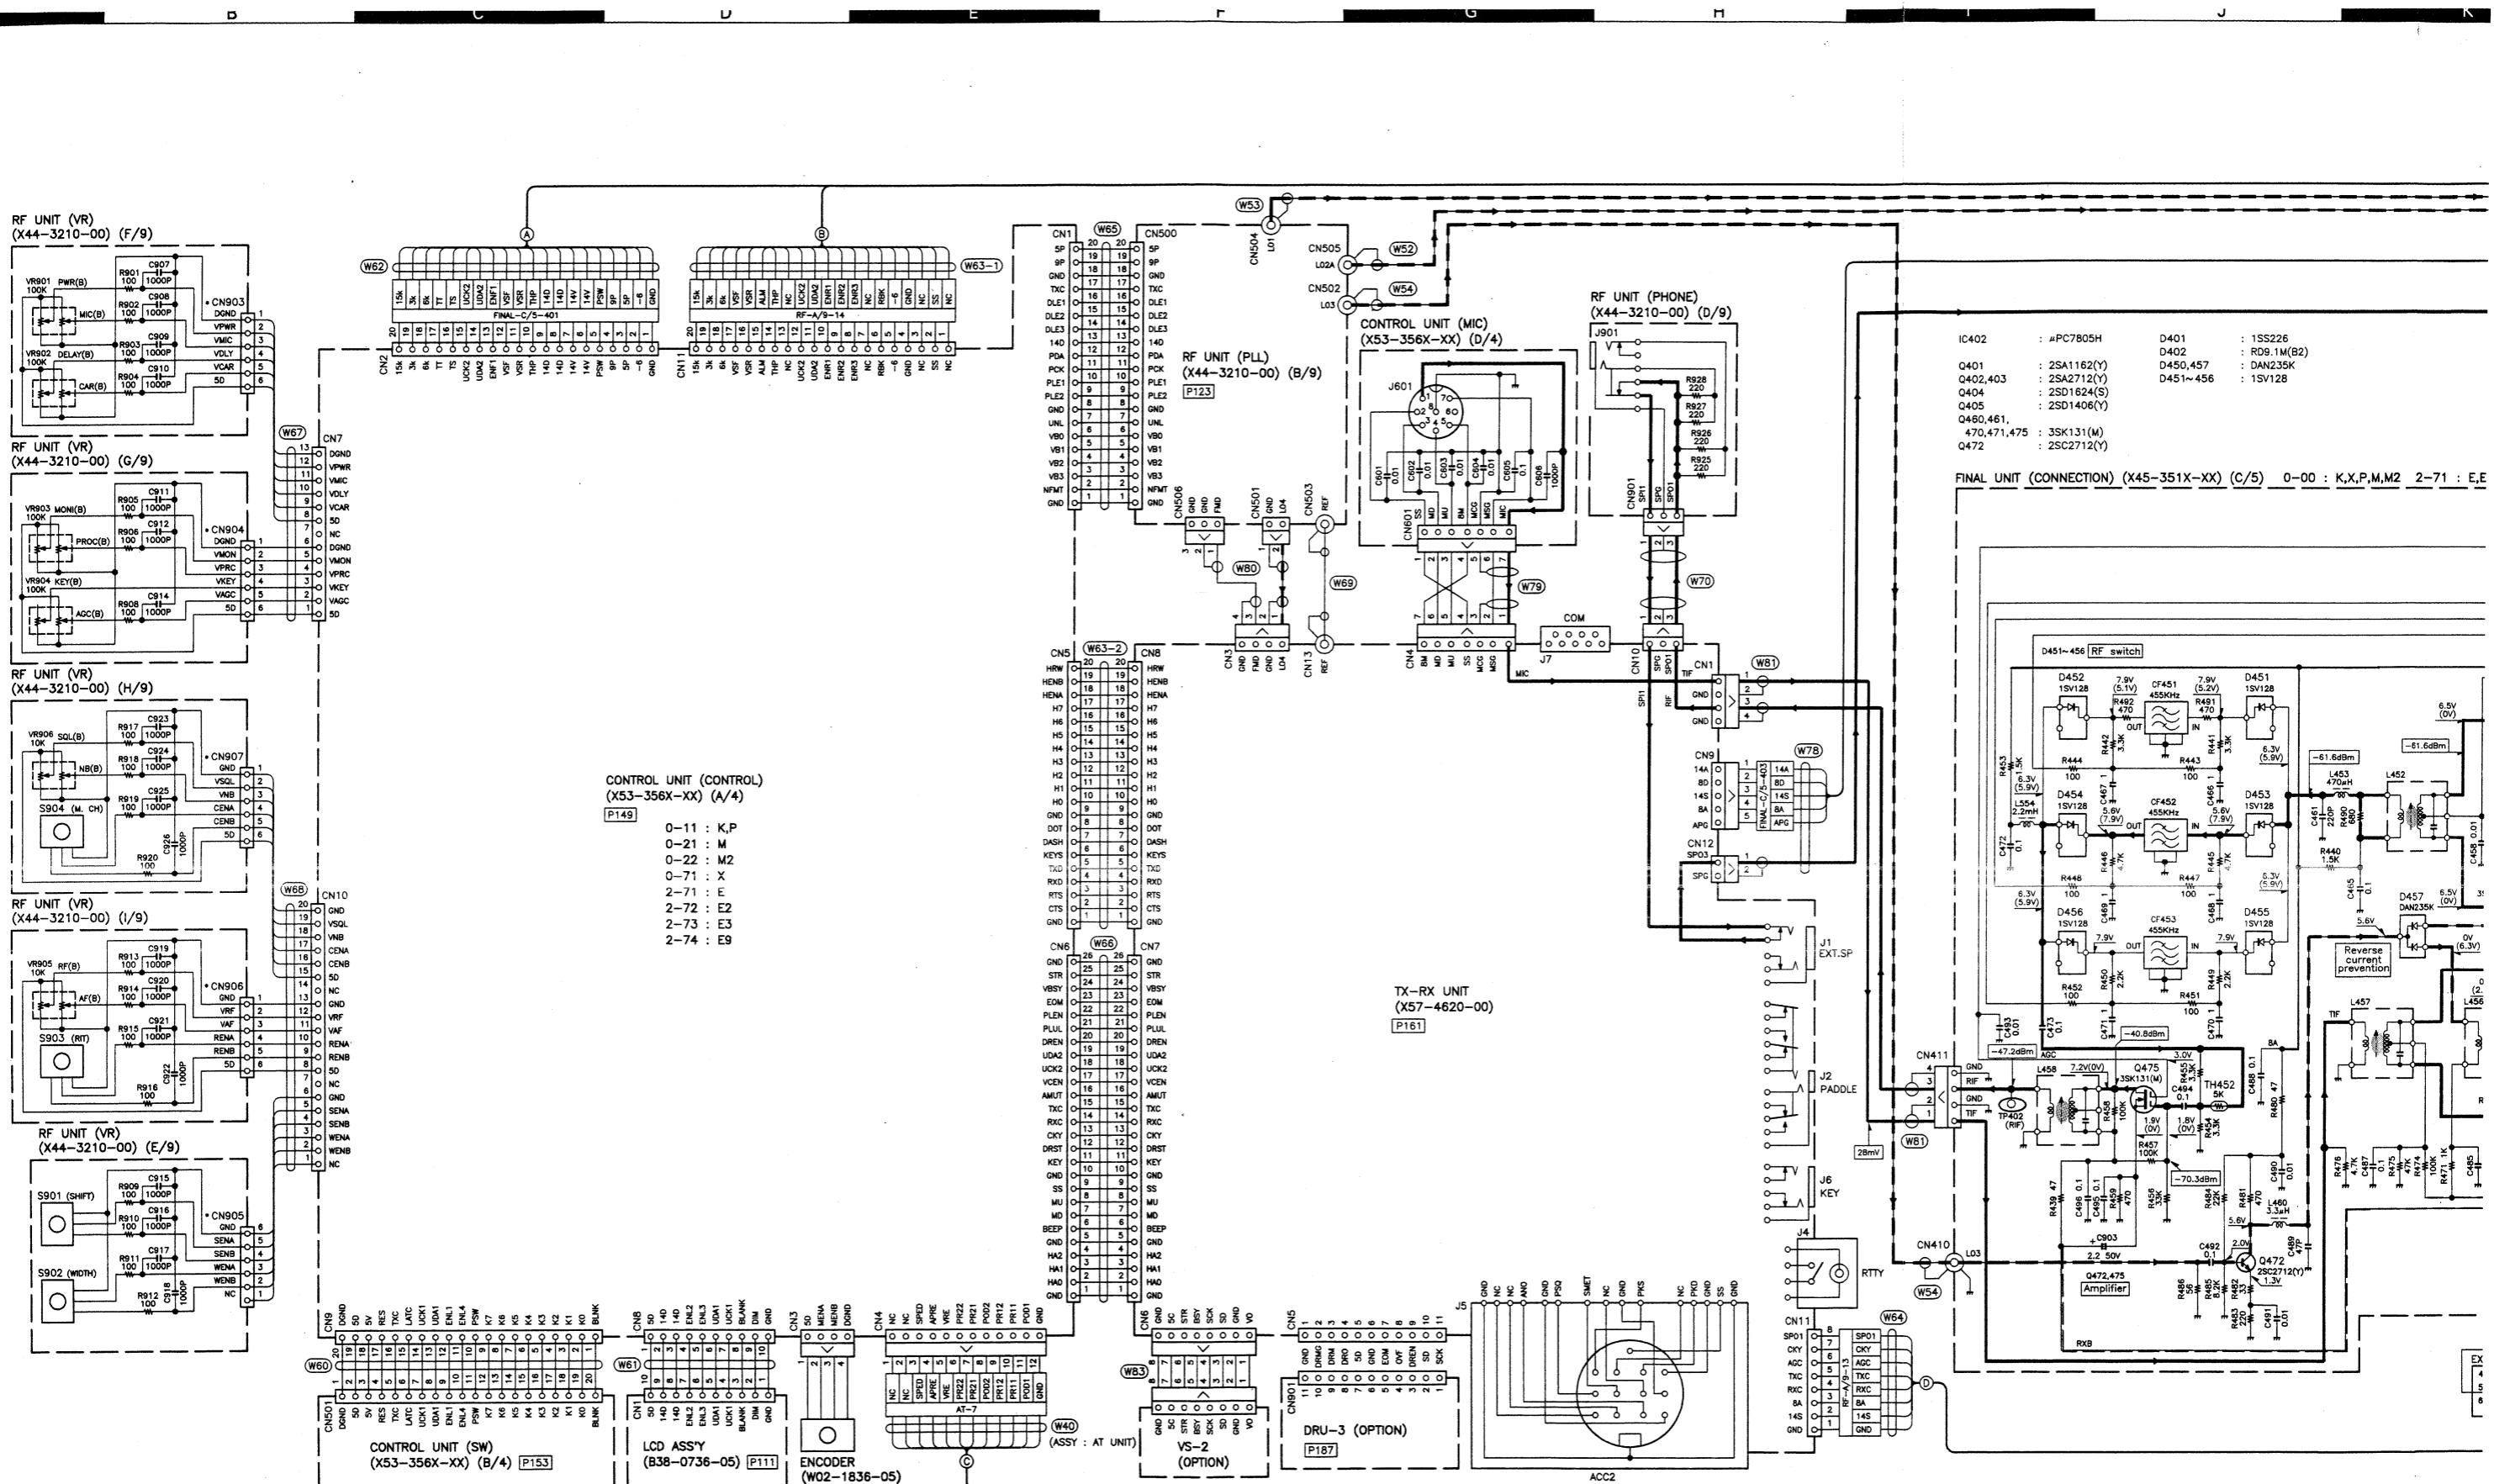


SCHEMATIC DIAGRAM TS-870S

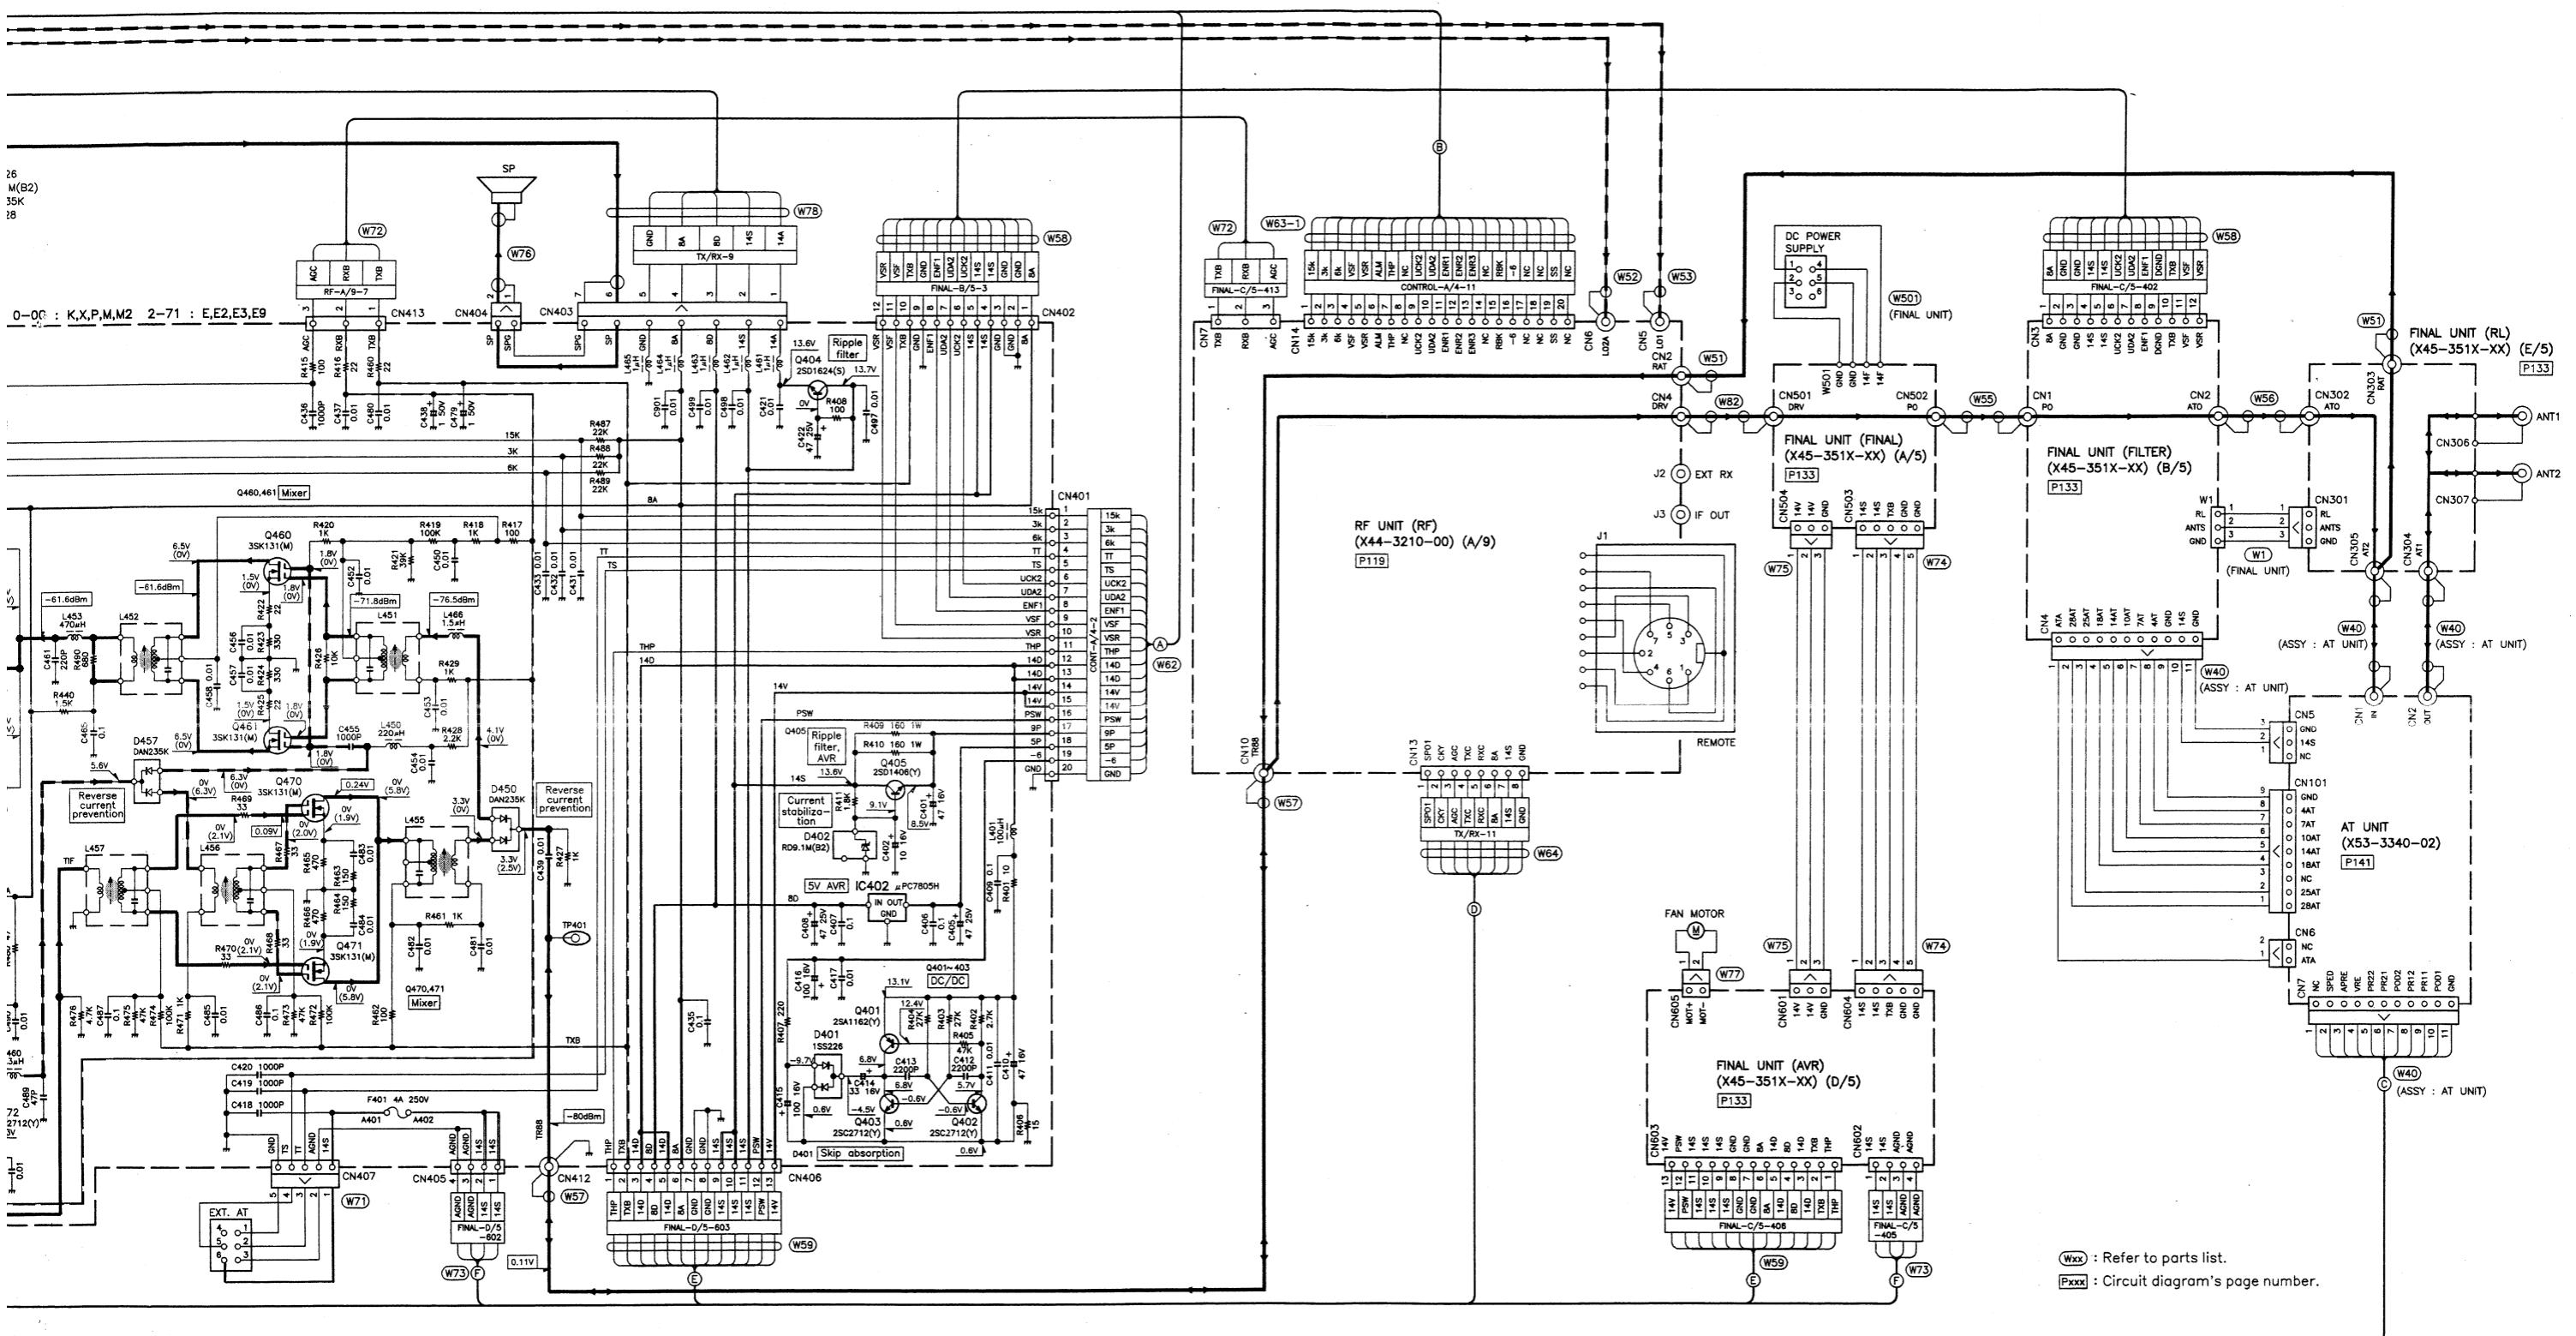


Wxx : Refer to parts list

Pxxx : Circuit diagram's page number.

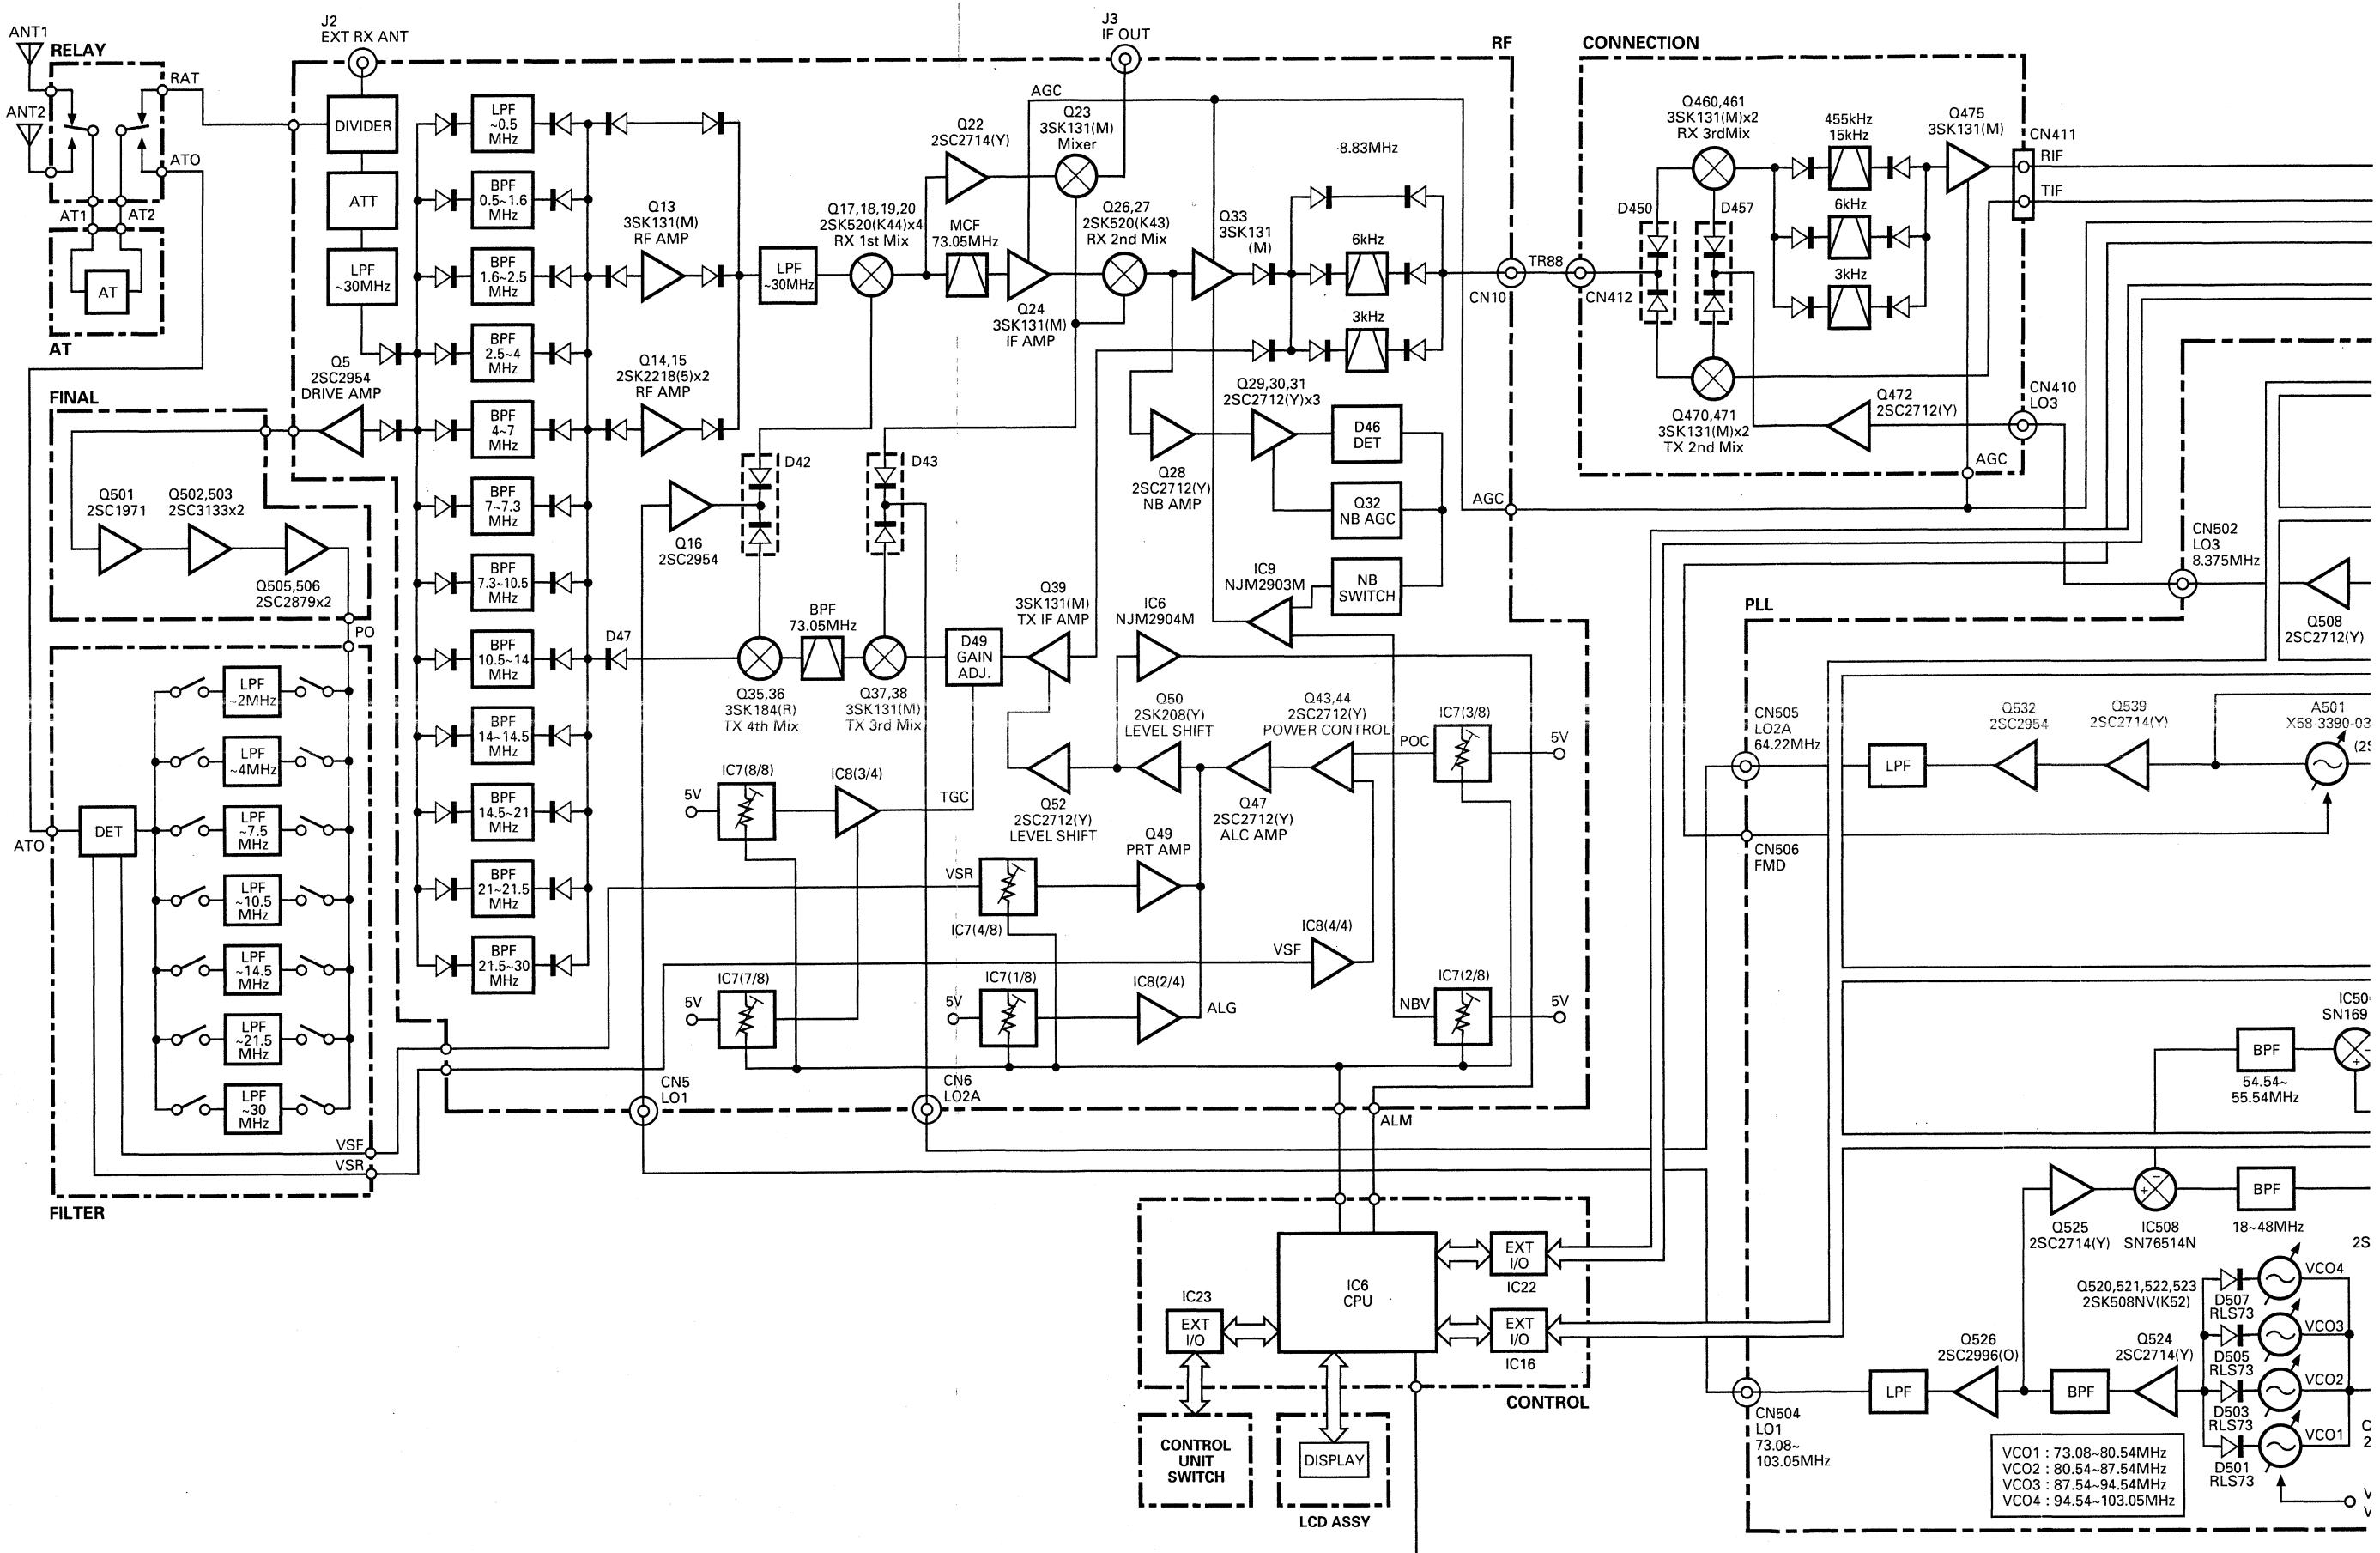


TS-870S TS-870S

DIAGRAM

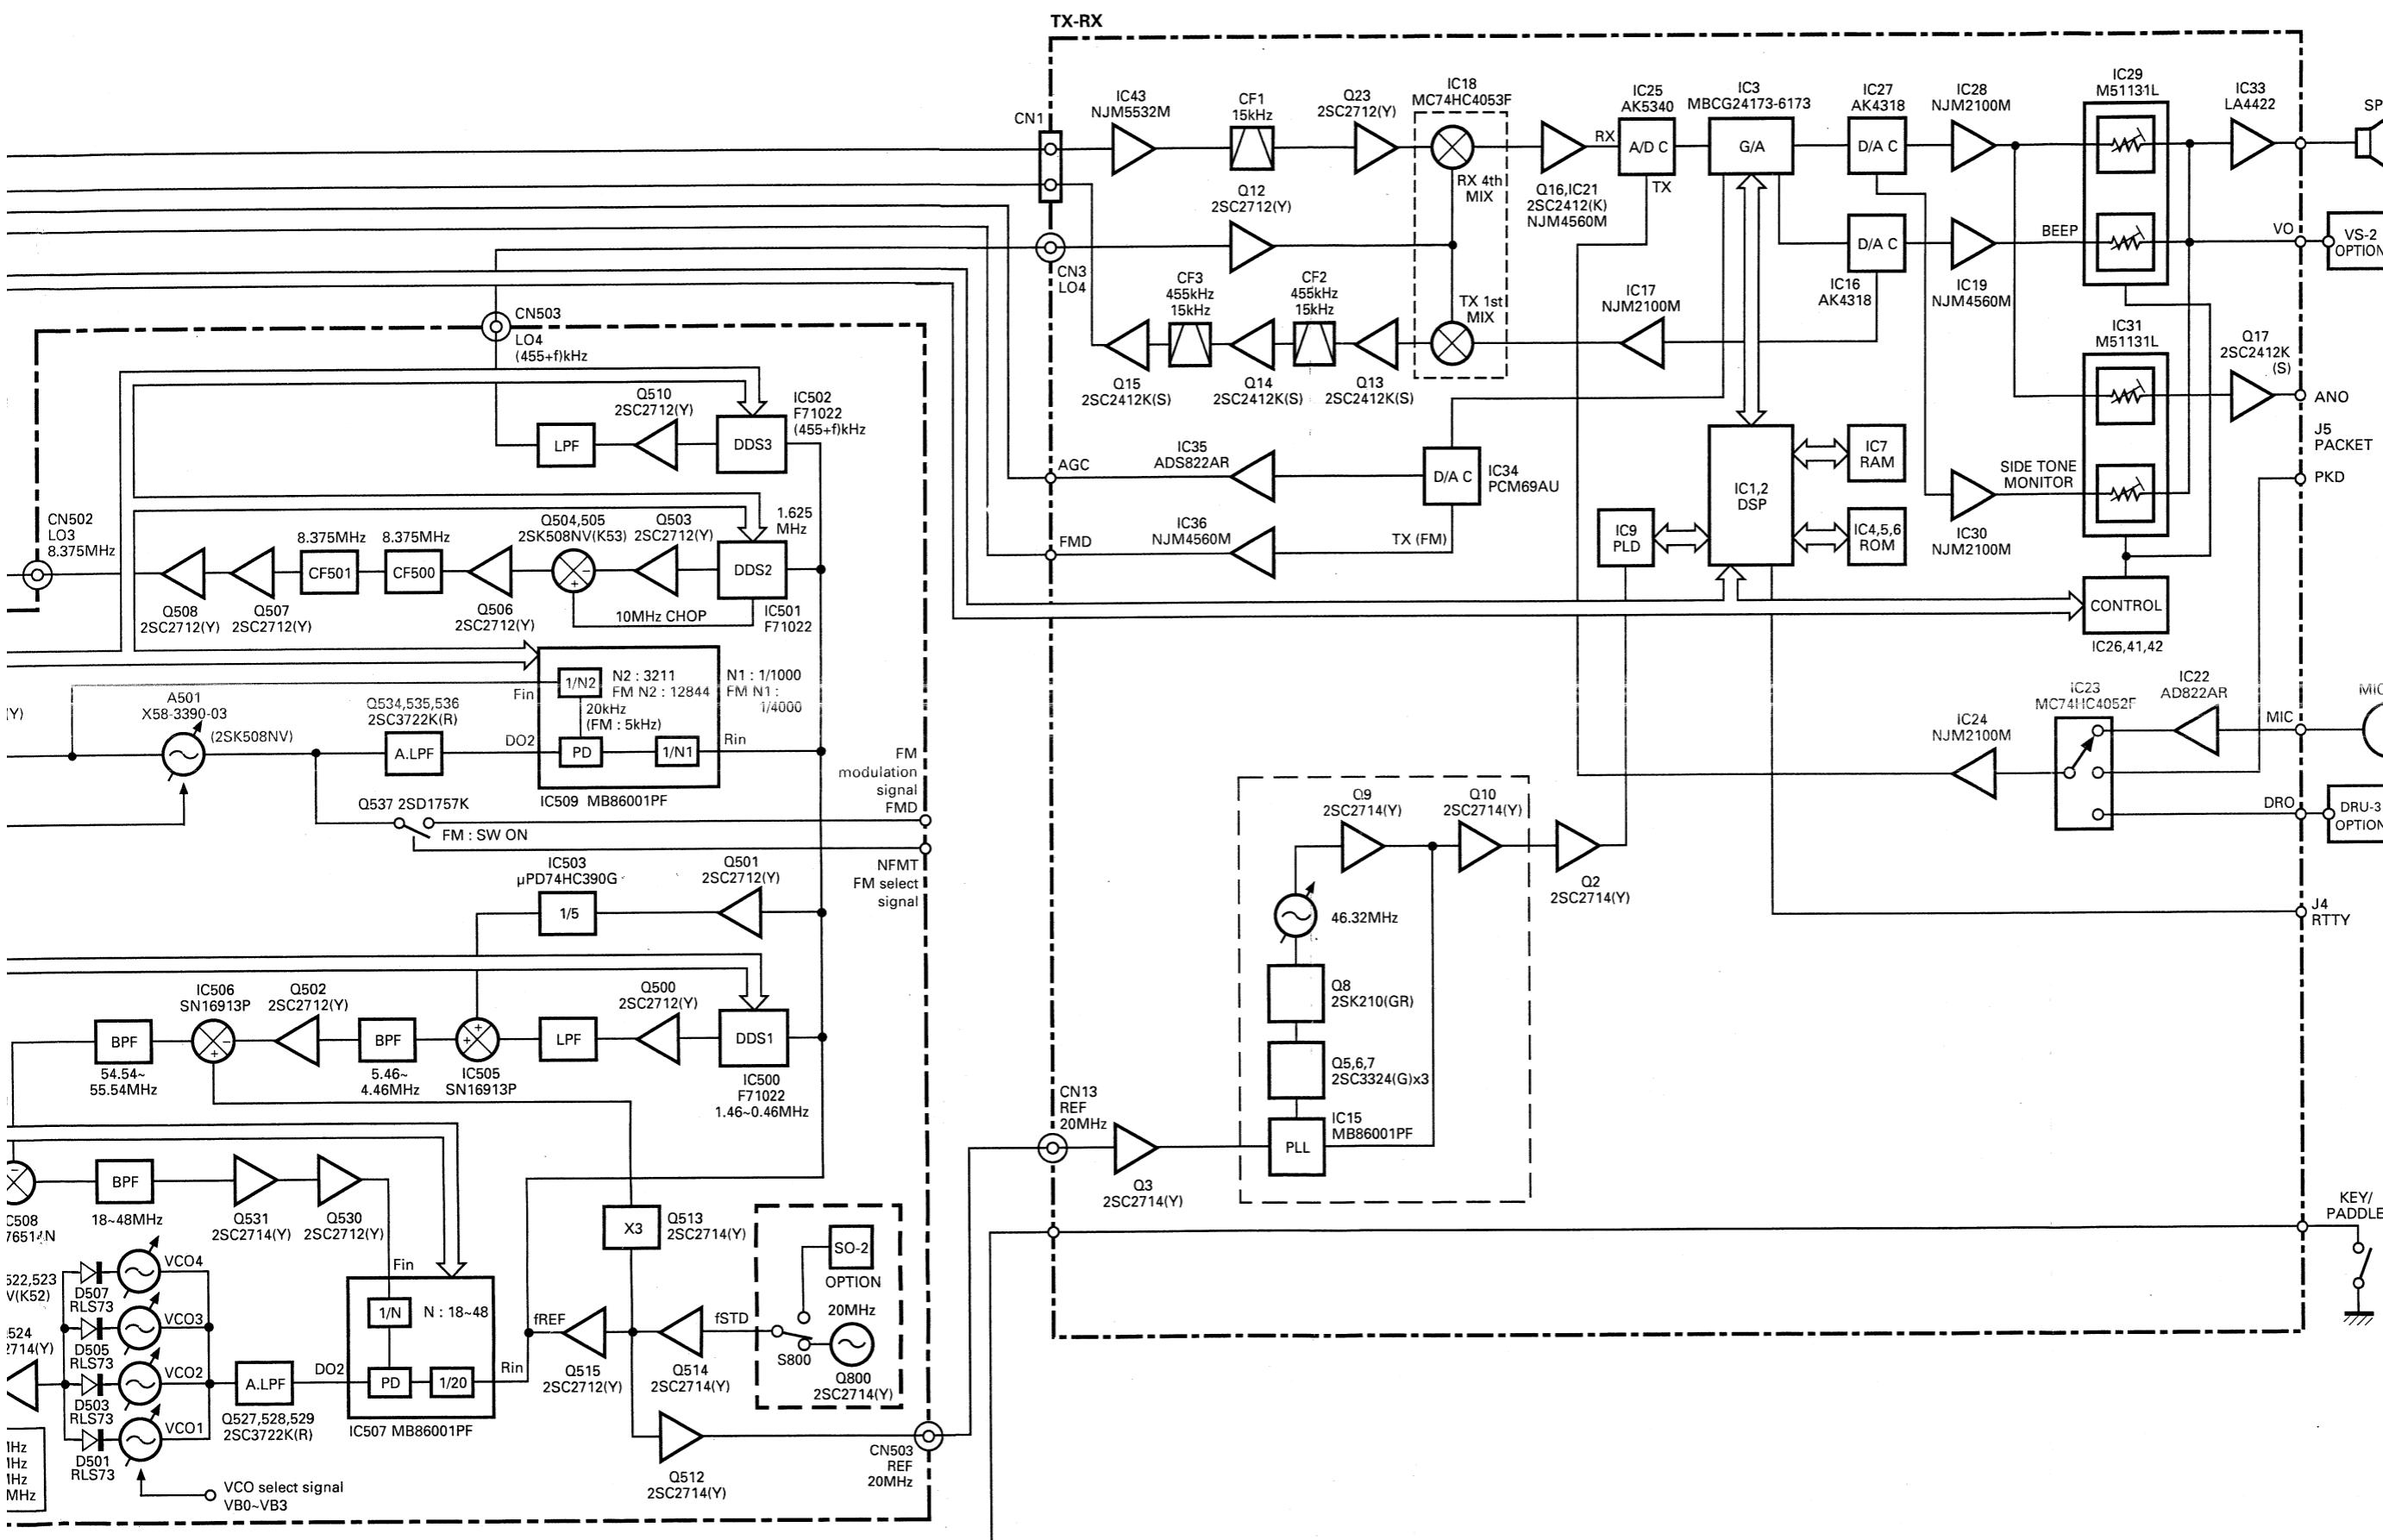

TS-870S TS-870S LEVEL DIAGRAM


Receiver Section

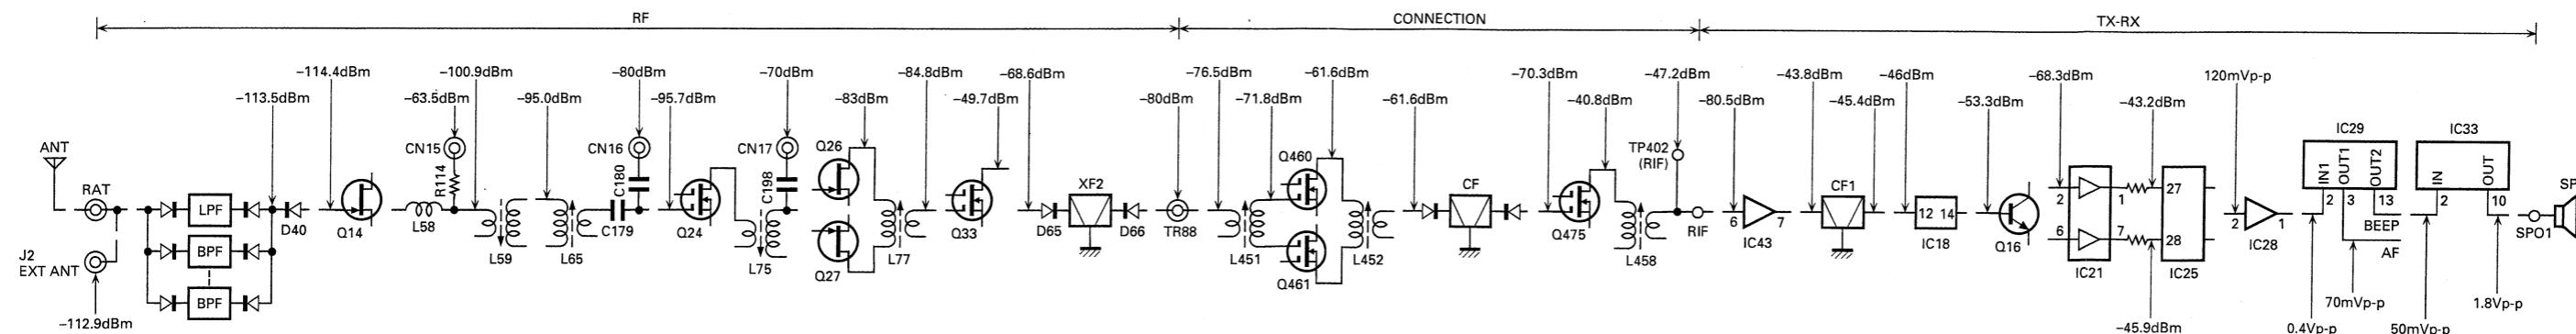

Measurement condition

- Frequency : 14.2MHz
 ANT input : -113dBm
 AF output : 0.63V/8Ω, 1kHz
- The figures shown are signal generator output required for a constant audio output with a constant AF gain control setting.
 Set the AF gain control for 0.63V/8Ω audio output at -113dBm signal generator input at 14.200MHz.
 - To measure signal generator output connect a 0.01μF capacitor between the signal generator and the check point.
 - AIP : OFF


Transmitter Section

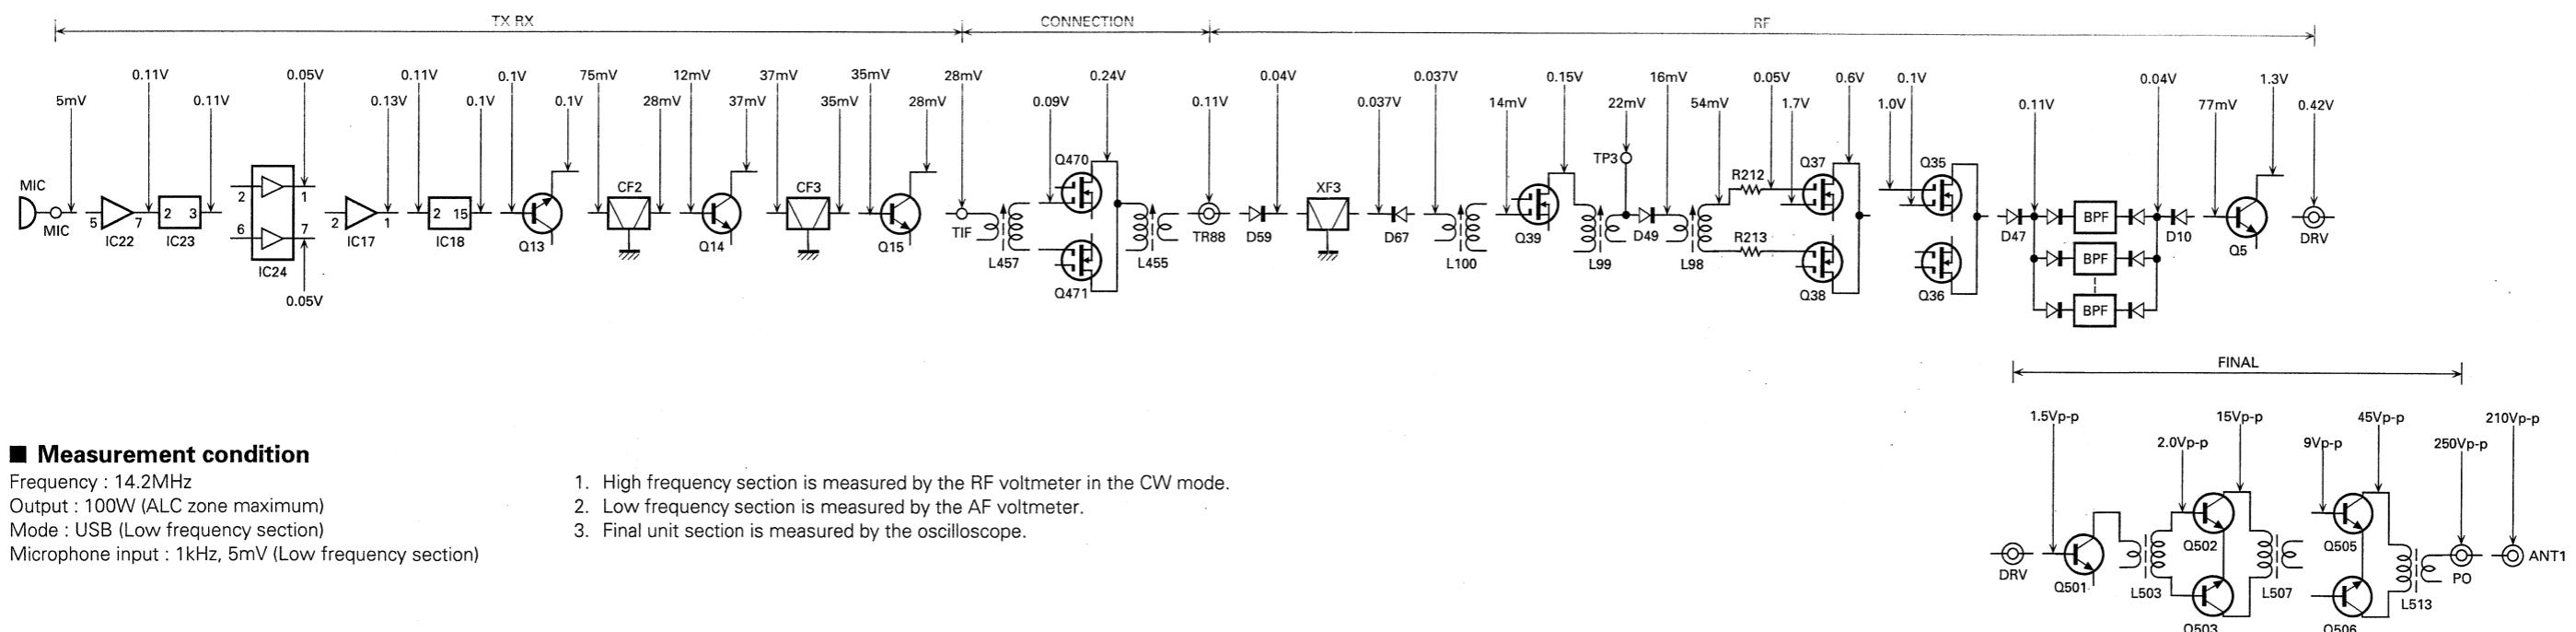



Measurement condition

- Frequency : 14.2MHz
 Output : 100W (ALC zone maximum)
 Mode : USB (Low frequency section)
 Microphone input : 1kHz, 5mV (Low frequency section)

- High frequency section is measured by the RF voltmeter in the CW mode.
- Low frequency section is measured by the AF voltmeter.
- Final unit section is measured by the oscilloscope.

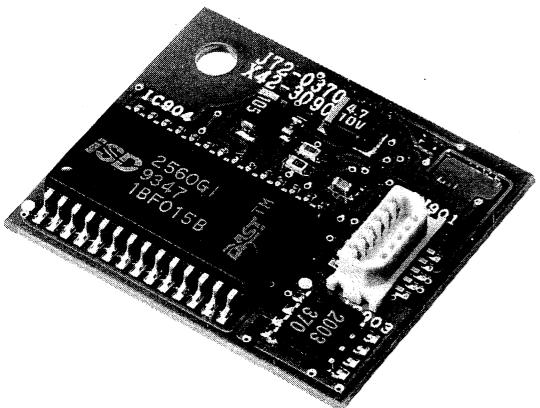DRU-3 (DIGITAL RECORDING UNIT)**DRU-3 External View****DRU-3 Parts List**

| Ref. No. | Address | New parts | Parts No. | Description | Desti-nation |
|-------------------------------------|---------|-----------|--------------|---------------------|--------------|
| ACCESSORY UNIT (X42-3090-20) | | | | | |
| C901,902 | | | CK73FB1H103K | CHIP C 0.010UF K | |
| C903 | | | CK73FF1E104Z | CHIP C 0.1UF Z | |
| C905 | | | CK73GB1H103K | CHIP C 0.010UF K | |
| C906 | | | C92-0004-05 | TAN C 1.0UF 16WV | |
| C907 | | | CK73GB1H102K | CHIP C 1000PF K | |
| C908 | | | C92-0009-05 | TAN C 4.7UF 10WV | |
| C909 | | | CK73GB1H103K | CHIP C 1000PF K | |
| CN901 | | * | E40-5748-05 | PIN CONNECTOR (11P) | |
| R901,902 | | | RK73GB1J103J | CHIP R 10K J 1/16W | |
| R903 | | | RK73GB1J223J | CHIP R 22K J 1/16W | |
| R904 | | | RK73GB1J103J | CHIP R 10K J 1/16W | |
| R905 | | | RK73GB1J474J | CHIP R 470K J 1/16W | |
| R906,907 | | | RK73GB1J103J | CHIP R 10K J 1/16W | |
| R908 | | | R92-1252-05 | CHIP R 0 OHM | |
| IC901,902 | | | MB88306PF | IC | |
| IC903 | | * | M62003FP | IC | |
| IC904 | | * | ISD2560GI | IC | |
| IC905 | | * | TC74HC112AF | IC | |

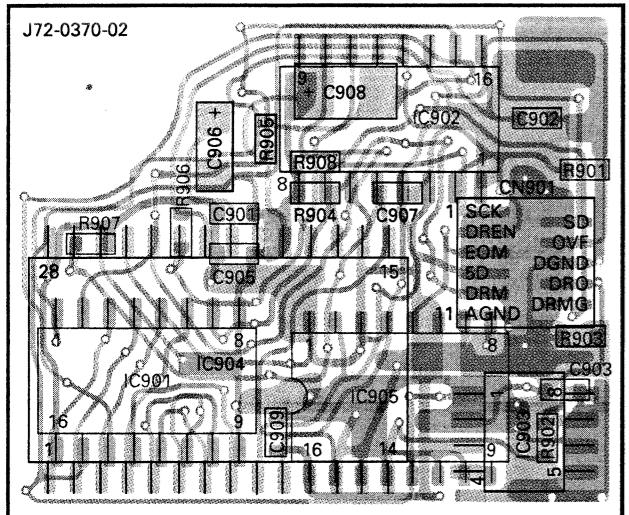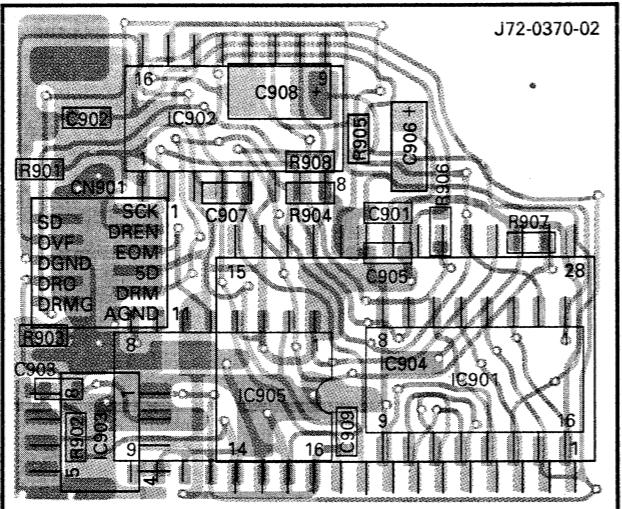DRU-3 PC Board Views**Component side view****Foil side view**

■ Component side
■ Foil side

DRU-3 (DIGITAL RECORDING UNIT)**Overview**

The DRU-3 is an optional digital audio recording/playback unit for the TS-870S. It has the following features.

- Record transmit tone (main unit MIC input)
- Playback recording from the speaker or output as transmit modulation signal

Operation**■ Recording transmit tone (MIC input)**



The microphone input signal from the DRM pin is input to IC904 (ISD2560GI) and recorded. The timing of each port is as follows.

The input address is set by pins 1 (A0) to 10 (A9) of IC904 (ISD2560GI). When pin 27 (P/R) is LOW, the signal is recorded while pin 23 (CE) is LOW.

■ Playback as transmit signal

The record signal is played from pin 14 (SP+) of IC904 (ISD2560GI). The timing of each port is as follows.

The playback address is set by pins 1 (A0) to 10 (A9) to IC904. When pin 27 (P/R) is HIGH, the signal is played back when pin 23 (CE) goes LOW. When playback ends, a LOW pulse is output from pin 25 (EOM). This pulse is latched by IC905 (TC74HC112AF), and pin 5 (1Q) of IC905 is kept HIGH. The microcomputer checks pin 5 of IC905, and pin 15 (1CLR) of IC905 is made LOW by the IC902 serial-to-parallel converter. Pin 5 of IC905 goes LOW and processing ends.

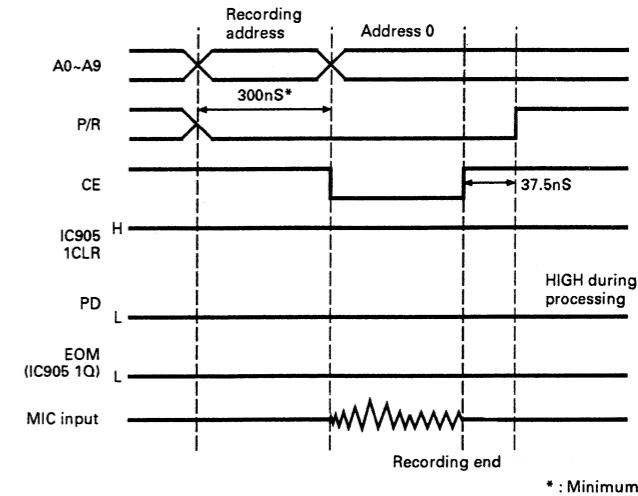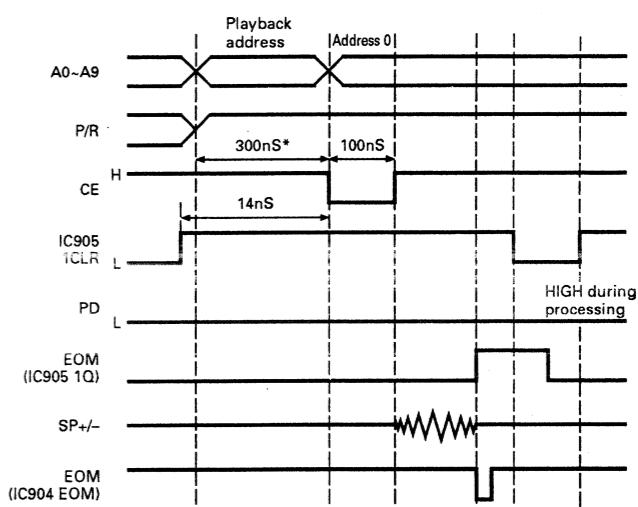Recording transmit tone (MIC input)**Playback as transmit signal****Timing waveform****I/O Map (IC904: ISD2560GI)**

| Pin No. | Port name | Pin name | I/O | Function | AL [active level] | Initial state |
|---------|-----------|----------|-----|-------------------------|-------------------|---------------|
| 1-10 | A0-A9 | | I | Address input | | |
| 11 | AUX | | | Unused | | |
| 12 | Vssd | | I | Digital ground | | |
| 13 | Vssa | | I | Analog ground | | |
| 14 | SP+ | DRO | O | Speaker analog output | | |
| 15 | SP- | | | Unused | | |
| 16 | Vcca | | I | 5V | | |
| 17 | MIC | DRM | I | Analog microphone input | | |
| 18 | Mref | DRMG | I | Microphone reference | | |
| 19 | AGC | | I | | | |


| Pin No. | Port name | Pin name | I/O | Function | AL [active level] | Initial state |
|---------|-----------|----------|-----|---|-------------------|---------------|
| 20 | ANAIN | | I | | | |
| 21 | ANAO | | O | | | |
| 22 | OVF | | O | Overflow signal output | L | H |
| 23 | CE | | I | | L | H |
| 24 | PD | | I | Interrupt processing | L | H |
| 25 | EON | | O | End of Message output | L | H |
| 26 | Xclk | | I | Unused | | |
| 27 | P/R | | I | Playback/record control signal "L" : Playback, "H" : Record. | | |
| 28 | Vccd | | I | 5V | | |

DRU-3 (DIGITAL RECORDING UNIT)

DRU-3 Circuit Diagram

X43-3090-20


IC901, 902 : MB88306PF
 IC903 : M62003FP
 IC904 : ISD2560GI
 IC905 : TC74HC112AF

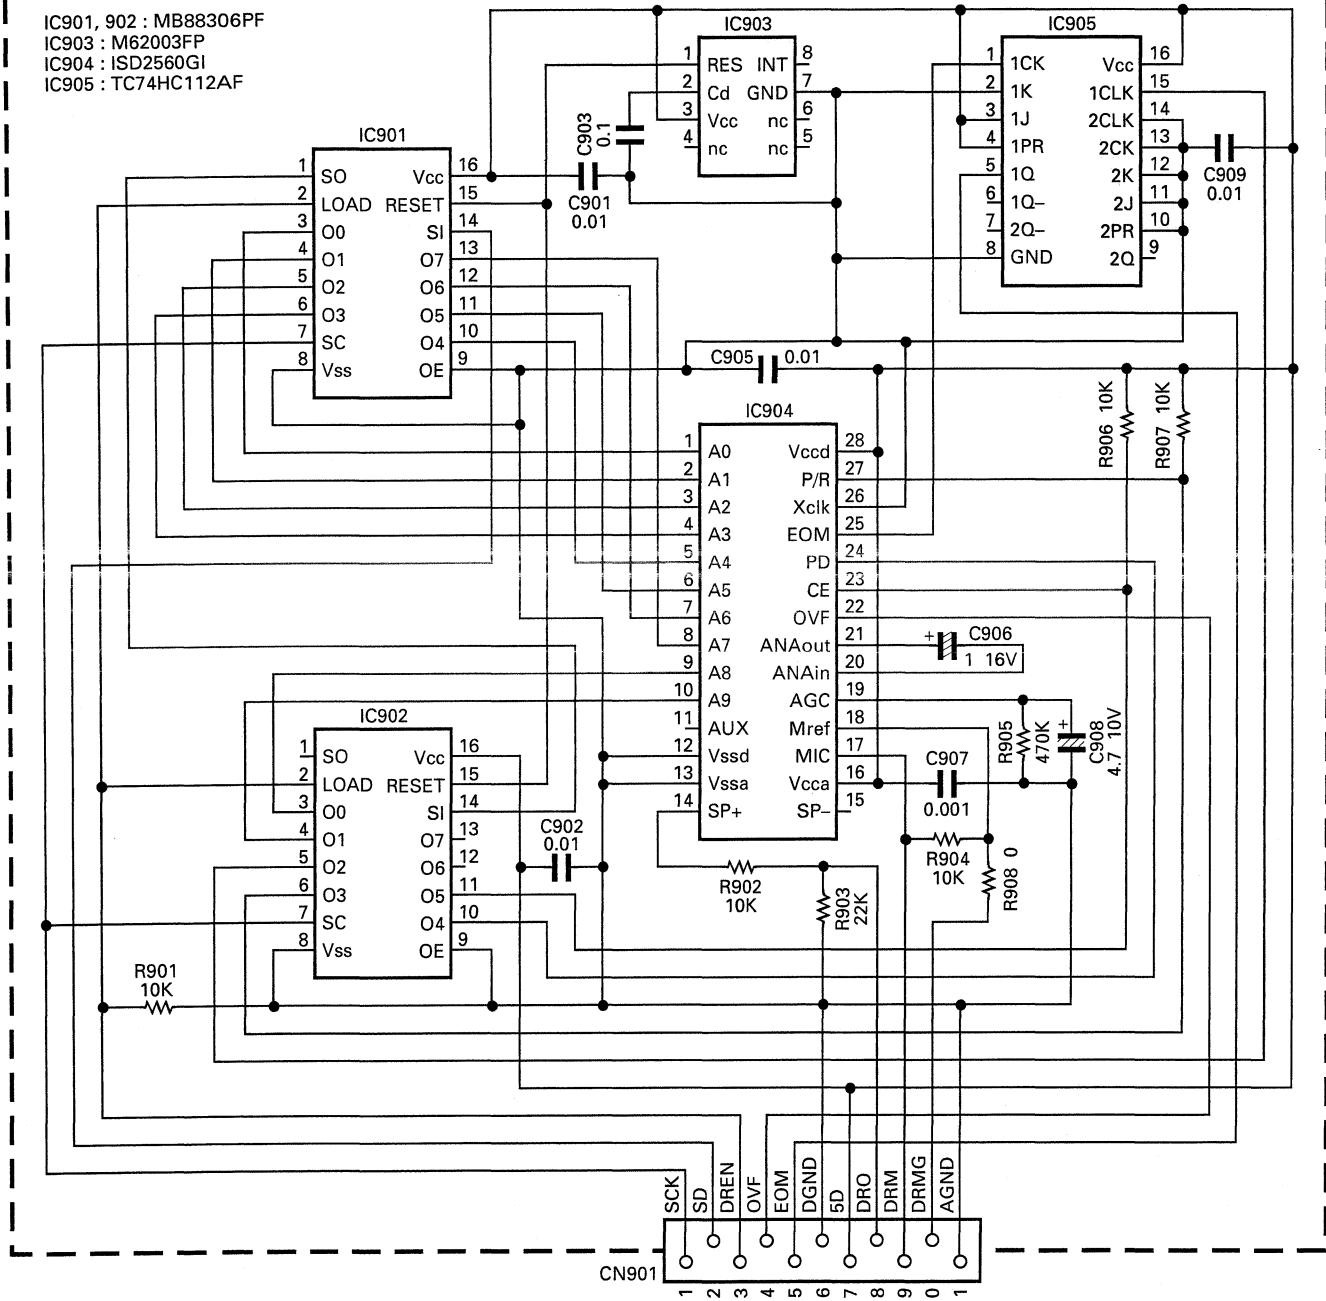

TS-870S

PG-2Z (DC CABLE)

PG-2Z External View

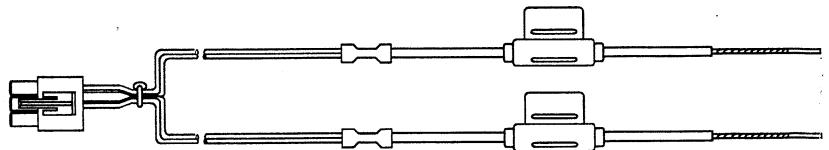

PG-2Z Parts List

| Parts No. | New parts | Description |
|-------------|-----------|----------------|
| E30-3157-15 | | DC cable assy |
| F05-2531-05 | | Fuse (25A/32V) |

TS-870S

SPECIFICATIONS

| Item | | Rating | |
|--------------------|---|--|--|
| GENERAL | Mode | J3E (LSB, USB), A1A (CW), A3E (AM), F3E (FM), F1D (FSK) | |
| | Number of memory channels | 100 | |
| | Antenna impedance | 50Ω (With Antenna Tuner 20 to 150Ω) | |
| | Supply voltage | DC 13.8V ± 15% | |
| | Grounding method | Negative ground | |
| | Current | Transmit (Max.) | 20.5A |
| | | Receive (No signal) | 2A |
| | Usable temperature range | -10°C to +50°C (+14°F to +122°F) | |
| | Frequency stability (-10°C to +50°C) | Within ±10PPM | |
| | Frequency accuracy (At room temperature) | Within ±10PPM | |
| TRANSMITTER | Dimensions [W x H x D] (Projections included) | 330 x 120 x 334 mm/13.0 x 4.72 x 13.1 in (339 x 135 x 375 mm/13.3 x 5.31 x 14.8 in) | |
| | Weight | Approx. 11.5kg (25lbs) | |
| | Frequency range | 160m band | 1.8 ^{*1} to 2.0 ^{*2} MHz |
| | | 80m band | 3.5 to 4.0 ^{*3} MHz |
| | | 40m band | 7.0 to 7.3 ^{*4} MHz |
| | | 30m band | 10.1 to 10.15MHz |
| | | 20m band | 14.0 to 14.35MHz |
| | | 17m band | 18.068 to 18.168MHz |
| | | 15m band | 21.0 to 21.45MHz |
| | | 12m band | 24.89 to 24.99MHz |
| | | 10m band | 28.0 to 29.7MHz |
| | Output power ^{*5} | SSB, CW, FSK, FM | Max. 100W |
| | | | Min. 20W or less |
| | | AM | Max. 25W |
| | | | Min. 20W or less |
| | Modulation | SSB | Balanced |
| | | FM | Reactance |
| | | AM | Low level |
| | Spurious emissions | -60dB or less | |
| | Carrier suppression | 50dB or more | |
| | Unwanted sideband suppression (Modulation frequency 1.0kHz) | 50dB or more | |
| | Maximum frequency deviation (FM) | Wide | ±5kHz or less |
| | | Narrow | ±2.5kHz or less |
| | Transmit frequency characteristics (-6dB) (TX lower cutoff : 300Hz, TX bandwidth : 2.3kHz) | 300 to 2600Hz | |
| | XIT shift frequency range | ±9.99kHz | |
| | Microphone impedance | 600Ω | |

*1 1.81MHz : Europe, France, Holland; 1.83MHz : Belgium, Spain

*2 1.85MHz : Belgium, France, Holland, Spain

*3 3.8MHz : Europe, Belgium, France, Holland, Spain

*4 7.1MHz : Europe, Belgium, France, Holland, Spain

*5 Belgium, Spain : 10W fixed on 160m band

TS-870S

SPECIFICATIONS

| Item | | | Rating | |
|------------------------------------|------------------|-----------------------------------|--|--|
| Circuit type | | | Quadruple conversion superheterodyne | |
| Frequency range | | | 100kHz to 30MHz | |
| Intermediate frequency | | | 1st : 73.05MHz, 2nd : 8.83MHz, 3rd : 455kHz, 4th : 11.3kHz | |
| RECEIVER | Sensitivity | SSB, CW, FSK (At 10dB (S+N)/N) | 100kHz to 500kHz 1μV or less 500kHz to 1.62MHz ⁶ 4μV or less 1.62MHz ⁶ to 24.5MHz 0.2μV or less 24.5MHz to 30MHz 0.13μV or less | |
| | | AM (At 10dB (S+N)/N) | 100kHz to 500kHz 2μV or less 500kHz to 1.62MHz ⁶ 31.6μV or less 1.62MHz ⁶ to 24.5MHz 2μV or less 24.5MHz to 30MHz 2μV or less | |
| | | FM (At 12dB SINAD) | 28MHz to 30MHz 0.25μV or less | |
| | | SSB Lo : 300Hz, Hi : 2600Hz | -6dB : 2.3kHz, -60dB : 3.3kHz | |
| | Selectivity | CW Width : 200Hz | -6dB : 200Hz, -60dB : 450Hz | |
| | | FSK Width : 500Hz | -6dB : 500Hz, -60dB : 1000Hz | |
| | | AM Lo : 100Hz, Hi : 4000Hz | -6dB : 9kHz, -60dB : 12kHz | |
| | | FM Width : 14kHz | -6dB : 14kHz, -60dB : 18kHz | |
| Image rejection (1.8MHz to 30MHz) | | | 80dB or more | |
| 1st IF rejection (1.8MHz to 30MHz) | | | 80dB or more | |
| Notch filter attenuation | | | 40dB or more | |
| RIT shift frequency range | | | ±9.99kHz | |
| Squelch sensitivity | SSB, CW, FSK, AM | 100kHz to 500kHz | 2μV or less | |
| | | 500kHz to 1.62MHz ⁶ | 20μV or less | |
| | | 1.62MHz ⁶ to 30MHz | 2μV or less | |
| | | FM | 28MHz to 30MHz 0.25μV or less | |
| Audio output (8Ω, 10% distortion) | | | 1.5W or more | |
| Audio output impedance | | | * 8Ω | |

*6 1.705MHz : Canada, U.S.A.

Specifications are subject to change without notice or obligation due to ongoing technological developments.

KENWOOD CORPORATION

14-6, Dogenzaka 1-chome, Shibuya-ku, Tokyo 150, Japan

KENWOOD SERVICE CORPORATION

P.O. BOX 22745, 2201 East Dominguez Street, Long Beach, CA 90801-5745, U.S.A.

KENWOOD ELECTRONICS LATIN AMERICA S.A.

P.O. BOX 55-2791 Piso 6 Plaza Chase Cl. 47 y Aquilino de la Guardia Panama, Republic of Panama

KENWOOD ELECTRONICS CANADA INC.

6070 Kestrel Road, Mississauga, Ontario, Canada L5T 1S8

KENWOOD ELECTRONICS DEUTSCHLAND GMBH

Riembrücker Str. 15, 63150 Heusenstamm, Germany

KENWOOD ELECTRONICS BENELUX N.V.

Mechelsesteenweg 418 B-1930 Zaventem, Belgium

TRIO-KENWOOD FRANCE S.A.

13, Boulevard Ney, 75018 Paris, France

TRIO-KENWOOD U.K. LIMITED

KENWOOD House, Dwight Road, Watford, Herts., WD1 8EB United Kingdom

KENWOOD ELECTRONICS NEDERLAND B.V.

Amsterdamseweg 35, 1422 AC Uithoorn, The Netherlands

KENWOOD ELECTRONICS ITALIA S.p.A.

Via G. Sirtori, 7/9 20129 Milano, Italy

KENWOOD IBERICA S.A.

Bolivia, 239-08020 Barcelona, Spain

KENWOOD ELECTRONICS AUSTRALIA PTY. LTD.

(A.C.N. 001 499 074)

P.O. Box 504, 8 Figtree Drive, Australia Centre, Homebush, N.S.W. 2140, Australia

KENWOOD & LEE ELECTRONICS, LTD.

Unit 3712-3724, Level 37, Tower one Metroplaza, 223 Hing Fong Road, Kwai Fong, N.T., Hong Kong