

**YAESU**

# **M-70 Desktop Microphone**


## **LOCK key**

This is a one touch PTT key with a lock function.

When the LOCK key is pressed, the transmit mode is set and held. When the key is pressed again the transceiver returns to receive mode again.


## **PTT key**

Press and hold down this key to transmit, and release it to receive.

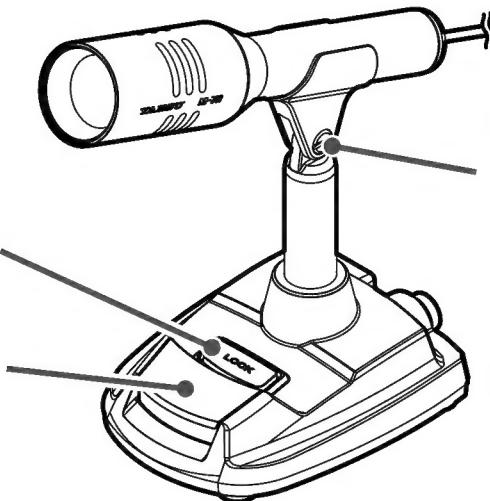

## **Angle adjustment Screws**

The angle of the microphone may be adjusted by loosening (turn counterclockwise) the screws on the left and right side of the pivot top. Place the microphone in the desired position and then tighten the screws (turn them clockwise) to secure the microphone.




## **MIC Jack (8-pin)**

Use the supplied microphone cable to connect the microphone to a transceiver that has a "modular terminal".

## **MIC Jack (modular)**

Use the supplied microphone cable to connect the microphone to a transceiver that has an "8-pin terminal".



## **Low-Cut switch**

When this switch is ON, a low-cut filter (cut-off frequency 340 Hz, -6 dB/octave) is activated.

## **Specifications**

Supply Voltage: DC 5.0 V ±10 %

Current Consumption: 15 mA (TYP)

Microphone Type: Condenser microphone

Frequency Response: 30 - 17000 Hz

Sensitivity: -60 dB (1 kHz 0 dB=1V/Pa)

Microphone Impedance: 600 Ohms

Dimensions (W x H x D): 4.2" x 6.7" x 5.0"

(106 x 170 x 126.5 mm)

\*H: Maximum with microphone flat

15.87 oz (450 g) w/o cable

## **Using the M-70 with Yaesu Transceivers**

The M-70 operates with the below Transceivers.

FT-817/ND	FT-818ND	FT-857/D	FT-891	FT-897/D
FT-450/D	FT-900	FT-991/A	FT-847	FT-920
FT-950	FT-1000MP	FT-1000MP	MARK-V	FT-2000/D
FTDX1200	FTDX3000D	FTDX5000	FTDX9000	
FTDX101D	FTDX101MP	FTDX10		
FT-747*	FT-840*	FT-850*	FT-990*	FT-1000*

\* Requires Optional "Power Supply Kit".

as of Feb, 2021

**Safety Precautions (Be Sure to Read)**  
Be sure to read the safety precautions printed in the Operating Manual of the compatible transceiver to use this product safely.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

## **Disposal of Electrical and Electronic Equipment**

Products with the symbol (crossed-out wheeled bin) cannot be disposed of as household waste.

Electronic and Electrical Equipment should be recycled at a facility capable of handling these items and their waste by products.

Please contact a local equipment supplier representative or service center for information about the waste collection system in your country.



YAESU MUSEN CO., LTD.

Tennouji Parkside Building  
2-5-8 Higashi-Shinagawa, Shinagawa-ku,  
Tokyo 140-0002 Japan

YAESU USA

6125 Phyllis Drive, Cypress, CA 90630, U.S.A.

YAESU UK

Unit 12, Sun Valley Business Park, Winnall Close  
Winchester, Hampshire, SO23 0LB, U.K.

2105L-BS  E B C 5 0 X 7 0 0