


材质: 120g 双铜

尺寸: 720 x 160 mm 风琴六折页

封面

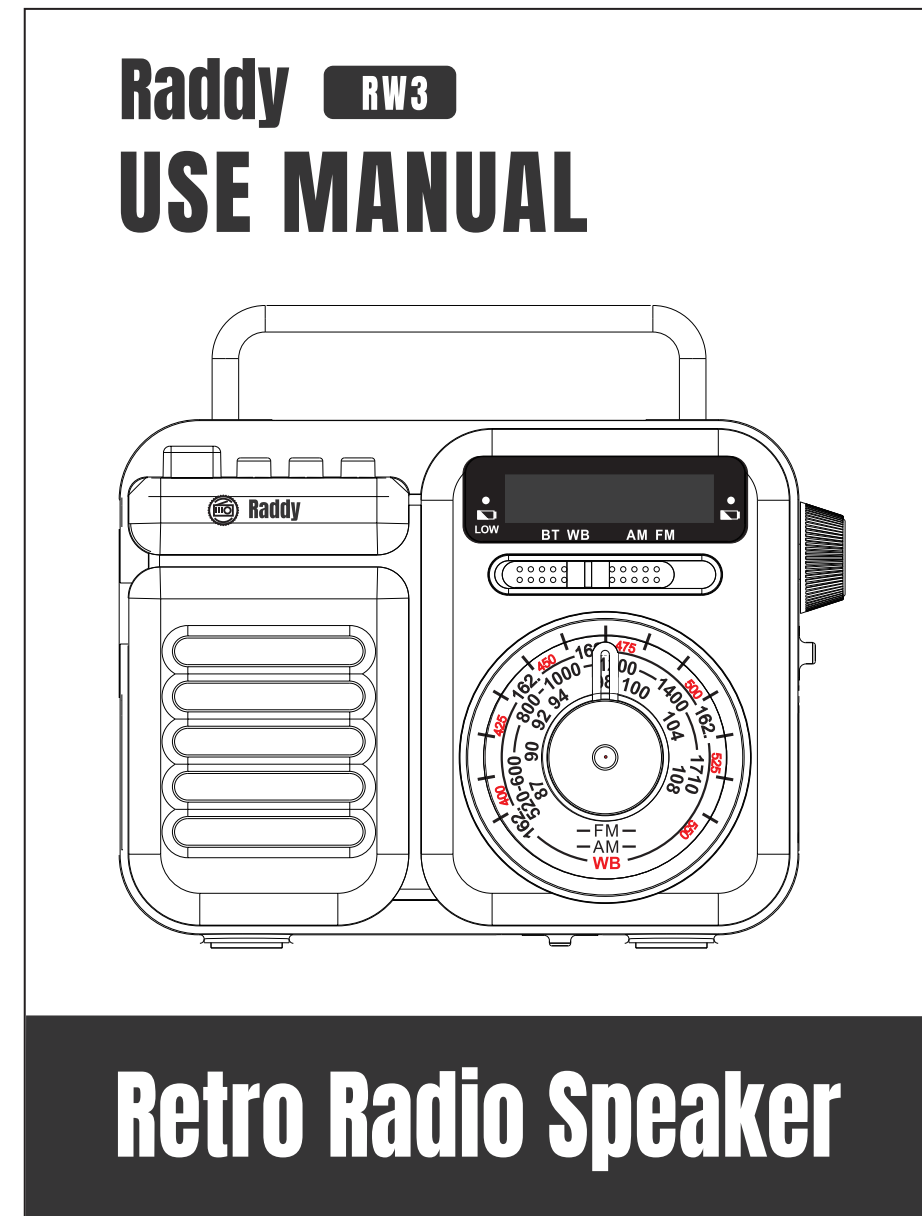

# Raddy RW3 USE MANUAL

**Raddy RW3**

**Contents**

- Radio Operation
- SOS Alarm
- FM/AM/WB Radio
- Bluetooth Speaker
- TF Card Player
- AUX player
- USB Flash Drive
- Phone Charging
- Flashlight
- Time Setting
- Alarm Clock
- Power the Device
- Specifications
- Warranty
- Safety Instructions
- Packing List

**Radio Operation**

1

**Raddy RW3**

• At the right-side of the radio, there's a POWER ON/OFF switch. When the radio is on, the backlight of the frequency panel will come on.

• It uses a special elector-acoustic design, which is tuned by a professional tuner, making this radio very good sound quality.

① POWER ON/OFF Button  
② Frequency Panel  
③ BT&Band Switch  
④ Charging Indicator (For solar and hand crank charging)  
⑤ Battery Indicator  
5.1 Fully Charged: Light Red  
5.2 Low Power: Flashing  
5.3 No Power: Light Off  
⑥ Flashlight Button  
⑦ Tune Up  
⑧ Tune Down  
⑨ Play/Pause/Function Switch Button

**SOS Alarm**

Bottom

• The radio has an SOS feature for emergencies that activates a loud siren and strobe.

- Push the switch at the bottom of the radio to the left (SOS) to activate it.
- Push the switch to the middle to turn off the SOS function.

2

**Raddy RW3**

**FM/AM/WB Radio**

- Push the band switch to the "FM/AM/WB".
- Rotate the tuning knob to select a channel.

**Bluetooth Speaker**

- Push the band switch to "BT".
- A sound "Ding Dong" will be heard in 3s.
- Turn on the Bluetooth on a mobile device, search the device named "MD-096" and connect with it.
- When the Bluetooth is connected, "Connect" will be heard and you can play your own music from the radio speaker.
- After disconnected the Bluetooth, "Disconnected" will be heard.

**NOTE: To ensure the sound quality in Bluetooth mode, the best reception distance is within 10 meters.**

**TF Card Player**

- Push the band switch to "BT".
- Insert a TF card into the slot at the right side of the radio.
- After hear "SD Mode", it will automatically play music.
- If TF card is inserted into the slot but you hear nothing, you can long press the button "⏸" for a few times until you hear "SD Mode". Then it will automatically play music.

3

**Raddy RW3**

**AUX Player**

- Turn the band switch to "BT".
- Use the supplied AUX cable to connect the radio with your phone/MP3/iPod/PC etc.
- Long press the button "⏸" until "AUX Mode" is heard, then it will play music.

Right-side

4

**Raddy RW3**

Volume Button

Micro USB Input /AUX Port

TF Card Slot

USB Charging Indicator

USB Output/USB Flash Drive Input

FC RoHS CE

Made in China

封底

**Raddy RW3**

**USB Flash Drive**

- Push the band switch to "BT".
- Insert "USB Flash Drive" to the USB port.
- When hear "USB Mode", it will automatically play music.
- If nothing is heard after the USB Flash Drive is plugged in, you can long press the button "⏸" for a few times until you hear it says "USB Mode". Then it will play music automatically.

**NOTE: This product has memory playback function.**

**Phone Charging**

- Push the switch to the "⚡" at bottom of radio.
- The standard USB port can be used to charge mobile phones, digital cameras, Airpods, MP3, MP4 and other devices in emergencies.
- It has the power capacity of 2000mAh when fully charged.

**NOTE: To extend the battery life, it's suggested to use this function only in emergencies.**

**Flashlight**

Flashlight

- Press on the flashlight button, and it will light up.
- Press it again to turn it off.

**NOTE: Don't irradiate the light to people's eyes.**

5

**Raddy RW3**

**Time Setting**

- Push the band switch to "BT", long press the "⏸" button two or three times until you hear "RTC Mode".
- Short press "⏸" and you'll see "CL" on the screen, press "⏸" again into time setting.
- You can press "⏸" and "⏸" to change the hour and minute digital, and press "⏸" to confirm.
- Time will continue after you turn off the radio, but won't show on the screen.

**NOTE: Morning time won't display "AM" on the screen, but it will display "PM" when you set afternoon time.**

**Alarm Clock**

- Push the band switch to "BT", long press the "⏸" button two or three times until you hear "RTC Mode".
- Short press the "⏸" button and you'll see "CL" on the screen. Press "⏸" or "⏸" to change to alarm clock setting mode, you will see "AL" on the screen. Press "⏸" again to enter.
- Press "⏸" or "⏸" to change the alarm clock status "ON/OFF". If you need to set an alarm clock, choose "ON" and press "⏸" to enter time setting. When you see the hour figure or minute figure is flashing, you can Press "⏸" or "⏸" to set them. Press "⏸" to confirm and save.
- If you don't need an alarm clock, select "OFF" and press "⏸" to confirm and save.

6

**Raddy RW3**

• Alarm clock will be heard at your setting time and play soft music from low volume to louder.

**NOTE:**

1. Turn off the alarm: Press "⏸" can turn off the alarm for today. If you don't turn it off manually, it will automatically stop after 1 minute and will ring again after 1 minute. Circulating for 15 minutes.
2. If you don't change the alarm status to "OFF", the alarm will repeat every day.

**Power the Device**

Before powering the radio, make sure you read the safety instructions.

**A. USB Charging**

- To charge the radio, plug the supplied USB cable into the USB power source. Plug the Micro USB connector into the Micro USB Input/AUX Port on the right side of the radio.
- When the battery is being charged, the charging indicator will light red. When the battery is fully charged, the indicator will light off.

**NOTE: It'd be better to turn off when it is charged.**

7

**Raddy RW3**

**B. Hand Crank**

The radio can also be charged by cranking the handle at the back of the device and activating the dynamo.

- The Charging Indicator will light red when the handle is being cranked.
- The handle can be turned either clockwise or counter-clockwise. Crank the handle for 3-5 min at the speed of 130 RPM when using the radio for the first time to wake up the battery.
- 1 min of cranking can support the flashlight for 30 minutes or radio playing (at the medium volume) for about 5 minutes.

**C. Solar Powered**

Expose the solar panel in clear sunlight to let it charge as efficiently as possible.

- The Charging Indicator will light red when the radio receives sunlight to start charging up.
- The charging effect depends on the intensity of sunlight and the irradiation time of sunlight.

**Kindly remind: It is mostly used for maintaining the battery or prolong the battery life through this way. With an average of sunlight, the battery needs 65 ~ 70 hours to be fully charged.**

8

**Raddy RW3**

**Specifications**

Frequency range	FM:87-108 MHz AM:520-1710 MHz WB:162.400-162.550 KHz
Dimensions	128*57*98 mm
Weight	395 g
Battery	2000mAh Li-on battery / 3.7V
Speaker Unit	8W 4Ω
Bluetooth	Bluetooth 5.0
Max current	≤350mA
Max Output Power	≈8W
Working Voltage	2.7V ~ 4.2V
Charging time(USB)	3-4h
Bright	120 LM
Bluetooth player	Max volume :3.5h 75% volume: 5h
After fully charged, the device supports	LED lighting: >7h Broadcast (middle volume): >20h

9

**Raddy RW3**

**Warranty**

- This radio has full 12 months warranty against manufacturing defects.
- The warranty period begins from the date of purchase.

**Safety Instructions**

1. Avoid violent shocks or falling.
2. Keep out of high temperature and humidity.
3. Cassettes, magnetic cards, and other magnetic recording software should be placed away from the body speakers to prevent the recorded content from being erased or noise on the cassette.
4. Please do not over discharge the unit, so as not to reduce the internal battery life, or even damage the internal battery.
5. Use a soft damp cloth to clean radio surface. Do not use alcohol or other liquids containing corrosive ingredients to clean this unit.
6. For the first use or when the unit idles over 60 days, please placed under strong solar light (sunlight > 86000LUX) for 30 minutes or hand crank for 1 minute to activate the internal battery.

**Packing list**

- Raddy RW3 Radio x 1
- User Manual x 1
- Micro USB Cable x 1

10