



UNIDEN R9w ACCESSORY PACK QUICK START GUIDE

R9w Front Radar Starter Pack

R9w Rear Radar Pack

R9w Front Laser Starter Pack

R9w Laser Add-On Pack

Uniden's R9w Accessory Packs let you tailor your system to your specific needs. You select the level of protection, from a front radar starter pack system that can evolve into a full protection system, including rear radar pack, front laser starter pack, and laser add-ons for additional protection for the front or rear of the vehicle.

This Quick Start Guide provides basic guidelines for installing and setting up R9w accessory packs to build your system. It also provides guidelines for using these accessory packs to upgrade R4w and R8w units into laser protection systems.

Refer to the R9w Owner's Manual at uniden.com for details.

About R9w ACCESSORY PACKS

There are 4 types of accessory packs:

- R9w Front Radar Starter Pack
- R9w Front Laser Starter Pack
- R9w Rear Radar Pack
- R9w Laser Add-On Pack

The following table lists all possible elements in the 4 R9w accessory packs and which packs contain which elements. Not all elements are in every pack.


	R9w Front Radar Starter Pack	R9w Rear Radar Pack	R9w Front Laser Starter Pack	R9w Laser Add-On Pack
Laser Distribution Box			1	
Front Radar Detector	1			
Rear Radar Detector		1		
Front Laser Transponder			3	

	R9w Front Radar Starter Pack	R9w Rear Radar Pack	R9w Front Laser Starter Pack	R9w Laser Add-On Pack
Add-On Laser Transponder				1
Radar/Laser Extension Cable		1		1
Host/Controller	1			
GPS Receiver	1			
Speaker	1			
Keypad	1		1	
Display	1			
Accessories	Full Set	Full Set	Bracket and Screws - 3	Bracket and Screws - 1

R9w Front Radar Starter Pack

This pack provides front radar detection.

The following illustration shows R9w Front Radar Starter Pack equipment placement.

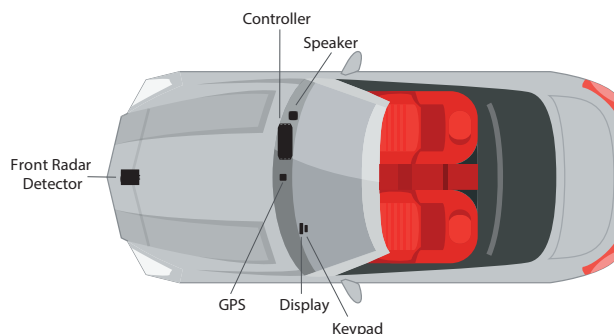

MENU SETUP

Since the front radar starter pack does not have rear radar or laser interface/transponders, turn OFF the Rear Radar and Laser menus. If they are set to ON, an error message displays.


R9w Rear Radar Pack

This pack provides rear radar detection.

REQUIREMENTS

The R9w Front Radar Starter Pack must be installed.

The following illustration shows R9w Rear Radar Pack equipment placement.

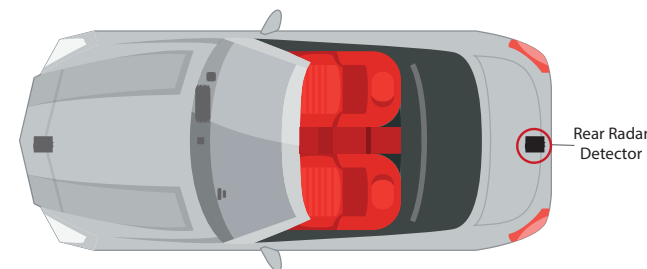

MENU SETUP

Since this rear radar pack does not have a front laser interface/transponder, turn OFF the laser mode. If Laser mode is set to ON, an error message displays.


R9w Front Laser Starter Pack

This pack provides laser protection to the front of the vehicle.

REQUIREMENTS

The R9w Front Radar Starter Pack must be installed to use the R9w Front Laser Starter Pack.

The following illustration shows R9w Front Laser Starter Pack equipment placement.

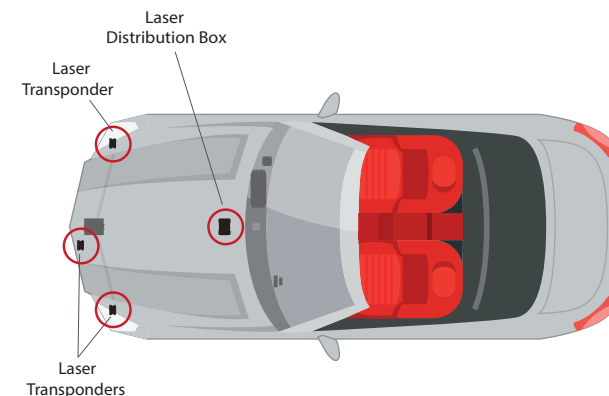

MENU SETUP

If the three transponders installed in the front of the vehicle are connected to TP1, TP2, or TP3, the Laser TP Settings should be:

TP1 - Front RX or Front TX

TP2 - Front RX or Front TX

TP3 - Front RX or Front TX

R9w Laser Add-On Pack


REQUIREMENTS

The R9w Front Radar Starter Pack and the R9w Front Laser Starter Pack must be installed.

Note: There must be a minimum of 2 laser add-on transponders if adding to the rear of the vehicle.

INSTALLATION

The following illustration shows equipment placement for installing the maximum number of individual R9w Laser Add-On Packs (3).

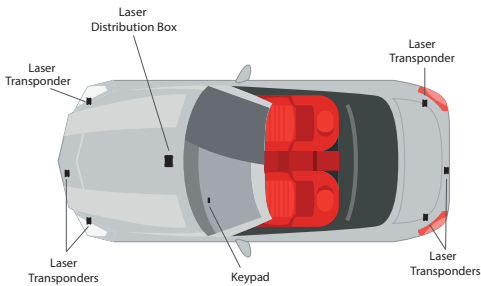

MENU SETUP

Set up the menus according to the number of transponders connected to the laser distribution box. Set any unconnected transponders to Off.

- Laser On/Off: On
- Laser TP Setting 1 ~ 6: Front Rx/Front Tx, Off; Rear Rx/Rear Tx; Off

Using the Installation graphic above as an example, the 3 transponders from the R9w Front Laser Starter Pack are installed in the front of the vehicle and are connected to TP1, TP2, and TP3. Three R9w Laser Add-On Packs are installed in the rear of the vehicle and are connected to TP4, TP5, and TP6.

Note: One rear laser transponder must be set to Rear TX and another rear transponder must be set to Rear RX.

The Laser TP Setting should be:

- TP1 - Front RX
- TP2 - Front TX
- TP3 - Front RX
- TP4 - Rear RX
- TP5 - Rear TX
- TP6 - Rear RX

Note: Six laser transponders are the maximum number of transponders possible. Contact your 12V installer for the appropriate configuration for your vehicle.


UPGRADING R4w and R8w MODELS

Use the R9w Front Laser Starter Pack to add laser protection capability to your R4w or R8w units. Use 3 R9w Laser Add-On Packs to increase laser protection to the rear of the vehicle.

Note: There must be a minimum of 2 laser add-on transponders if adding to the rear of the vehicle. One rear laser transponder must be set to Rear TX and another rear laser transponder must be set to Rear RX

INSTALLATION

The following illustration shows equipment placement for installing the maximum number of laser transponders.

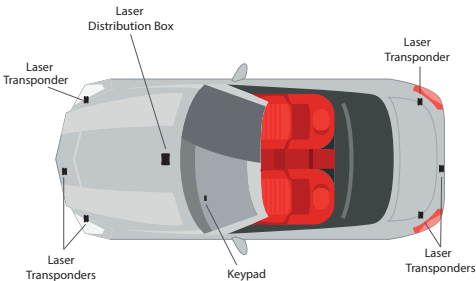

Connect the Laser Distribution Box to the RJ11 port on the R4w or R8w. Connect the Keypad to the RJ11 port on the Power Adapter.

Once transponders are connected through the Laser Distribution Box, menu items related to them are unlocked and visible in the Menu system. These menu items are:

- Laser TP
- Laser TP Mode
- Laser TP Settings

THREE-YEAR LIMITED WARRANTY

Keep your receipt! Proof of purchase from an authorized Uniden dealer, reseller or installer is required for warranty service.

WARRANTOR: UNIDEN AMERICA CORP. (“UNIDEN”).

LIMITED WARRANTY: Uniden warrants, for three years, to the original retail owner, this Uniden Product to be free from defects in materials and craftsmanship, subject to the limitations and/or exclusions set forth herein. This warranty shall terminate 36 months after the date of the original retail sale.

LIMITATIONS AND EXCLUSIONS: This warranty applies only to purchases made from an authorized Uniden dealer, reseller or installer by the original retail purchaser of to the recipient of the product as a gift from the original retail purchaser. Proof of purchase or gift receipt is required. This warranty is invalid and/or shall be void if the Product has been (A) damaged or not maintained as reasonable or necessary, (B) modified, altered, or used as part of any conversion kits, subassemblies, or any configurations not sold by Uniden, (C) improperly installed, (D) serviced or repaired for a defect of malfunction covered by this warranty by someone other than an authorized Uniden service center, (E) used in conjunction with equipment or parts or as part of any system not manufactured by Uniden, or (F) installed or programmed by anyone other than as detailed by the Installation Guide or Owner’s Manual included for this Product. The Warranty does not apply to Products purchased from non-authorized dealers, resellers, or installers, including, but not limited to, online auction websites or other similar platforms.

STATEMENT OF REMEDY: In the event that the product does not conform to this warranty at any time while this warranty is in effect, warrantor will repair the defect without charge for parts, service, or any other cost (except shipping and handling, if applicable) incurred by warrantor or its representatives in connection with the performance of this warranty.

THE LIMITED WARRANTY SET FORTH ABOVE IS THE SOLE AND ENTIRE WARRANTY PERTAINING TO THE PRODUCT AND IS IN LIEU OF AND EXCLUDES ALL OTHER WARRANTIES OF ANY NATURE WHATSOEVER, WHETHER EXPRESS, IMPLIED OR ARISING BY OPERATION OF LAW, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. THIS WARRANTY DOES NOT COVER OR PROVIDE FOR THE REIMBURSEMENT OR PAYMENT OF INCIDENTAL OR CONSEQUENTIAL DAMAGES. Some states do not allow this exclusion or limitation of incidental or consequential damages so the above limitation or exclusion may not apply to you.

LEGAL REMEDIES: This warranty gives you specific legal rights, and you may also have other rights which vary from state to state. This warranty is void outside the United States of America.

PROCEDURE FOR OBTAINING PERFORMANCE OF WARRANTY: If, after following the instructions in the Installation Guide and Owner’s Manual, you are certain that the Product is defective, please contact (i) the authorized Uniden installer who installed your product, or (ii) Customer Support at 1-800-297-1023, Monday through Friday 8am to 5pm, or email custsupport@uniden.com. Please be ready to provide evidence of original gift receipt and information describing the defect you believe exists.

Uniden America Corporation
301 International Parkway, Suite 460
Flower Mound, Texas 75022