



VHF FM Transceiver

DJ-A11

UHF FM Transceiver

DJ-A41

DJ-A36

Instruction Manual

Thank you for purchasing your new Alinco transceiver. Please read this manual carefully before using the product to ensure full performance, and keep this manual for future reference as it contains information on after-sales service.

In case addendum or errata sheets are included with this product, please read those materials and keep them together with this instruction manual for future reference.

DJ-A11



Hereby, ALINCO, INC. declares that the radio equipment type DJ-A11 is in compliance with Directive 2014/53/EU.

The full text of the EU declaration of conformity is available at the following internet address: <http://www.alinco.com/Ce/>

DJ-A41



Hereby, ALINCO, INC. declares that the radio equipment type DJ-A41 is in compliance with Directive 2014/53/EU.

The full text of the EU declaration of conformity is available at the following internet address: <http://www.alinco.com/Ce/>

ALINCO, INC.

Yodoyabashi Dai-bldg 13F
4-4-9 Koraibashi, Chuo-ku, Osaka 541-0043 Japan
Phone: +81-6-7636-2362 Fax: +81-6-6208-3802
<http://www.alinco.com>
E-mail: export@alinco.co.jp



Copyright Alinco, Inc. PS0780C/FNEI-NF
Printed in China

Introduction

Thank you very much for purchasing this excellent Alinco transceiver. Our products are ranked among the finest in the world. This radio has been manufactured with state of the art technology and it has been tested carefully at our factory. It is designed to operate to your satisfaction for many years under normal use.

Please read this manual completely from the first page to the last, to learn all the functions the product offers. It is important to note that some of the operations may be explained in relation to information in previous chapters. By reading just one part of the manual, you may risk not understanding the complete explanation of the function.

Before transmitting

There are many radio stations operating in the frequency ranges this product covers. Be careful not to cause interference when transmitting around such radio stations.

■ Lightning

Any person is not safe outdoor during thunderstorm and lightning. This condition is getting worse if somebody keeps a hand-held radio; chances of being hit by lightning are doubled since lightning may hit a radio antenna as well. At this time, there is no hand-held radio having any kind of protection against lightning current (which is higher than 10 kA.). Note also that no car provides adequate protection of its passengers or drivers against lightning as well. Therefore, Alinco will not take responsibility for any danger associated with using its hand-held radios outdoor or inside the car during lightning.

■ About IP54 rating / Dust and splash resistant

About IP54 rating

- 5: Dust protected / Ingress of dust is not entirely prevented, but it must not enter in sufficient quantity to interfere with the satisfactory operation of the equipment; complete protection against contact.
- 4: Splashing water / Water splashing against the enclosure from any direction shall have no harmful effect.
Test duration: 5 minutes / Water volume: 10 liters per minute / Pressure: 80~100 kN/m²

The IP54 designation provides for limited dust and splash proofing of the radio per specified above. This compatibility is factory guaranteed for a period of one year provided all the jack covers are securely in place, any accessories connected must be specified genuine Alinco accessories and the radio has not been disassembled by the customer. The factory has tested and made the equipment compatible to IP54 certification during engineering. However, please understand that this equipment is not certified IP54 compliant but is designed to remain operational when used in hard conditions and is in no way stating that you should attempt to wash the radio for cleaning. Warranty will not cover radios that are water/dust damage due to negligence or misuse of the product.

The warranty period of dust and splash resistance is the same as the period of the product warranty.

■ Covering ranges

You may expect a range of approx.3km/2 miles or more at high-power when located on a flat, noise-free place like on a beach. However,it may vary drastically depending on how to wear and carry the radios, surrounding locations/conditions and static noise levels (below or near power transmission lines), etc. In urban areas with many buildings or inside a building, such covering range will become drastically short even to several tens of meters.

Features

- **Output power selectable 5W/2W/0.5W**
- **128 PC-programmable channels (16ch x 8groups)**
- **Li-Ion battery pack and stand-charger as standard accessories**
- **Voice Componder (Reduce Noise & enhance audio clarity)**
- **Inversion Scramble(Analog encryption)**
- **Sub-tone (CTCSS/DCS) Encode/Decode and DTMF**
- **VOX built-in**

SAFETY TRAINING INFORMATION

Warning: Please Read Carefully

A transceiver generates RF (Radio Frequency) electromagnetic energy while transmitting. This Alinco transceiver is designed for and classified as “Occupational Use Only”, meaning it must be used minimum necessary only during the course of employment by employees aware of the hazards, and the ways to minimize such hazards. This transceiver is not intended for use by the “General Population” in an uncontrolled environment. This transceiver has been required “SAR-Standard” tested and complies with the FCC RF exposure limits for “Occupational Use Only”.

To ensure that your expose to RF electromagnetic energy is within the allowable limits for occupational use, always adhere to the following guidelines:

- DO NOT operate the transceiver without a proper antenna attached, as it may damage the transceiver and may also cause you to exceed FCC RF exposure limits. A proper antenna is the genuine antenna supplied with this transceiver by Alinco or ones specifically authorized by the antenna manufacturer for use with this transceiver.
- ALWAYS keep the antenna at least 3cm (1 inch) away from your body when transmitting and only use the original belt clips when attaching the transceiver to your body (Unauthorized attachment devices may help radiating more electromagnetic energy). To obtain the best sound quality during communications, hold the antenna at least 6cm (2 inches) from your mouth, and slightly off to one side.
- Use only the genuine Alinco accessories listed in this instruction manual for RF safety. Third party accessories are not guaranteed for RF safety by Alinco.
- **Electromagnetic Interference/Compatibility**
During transmissions, a transceiver generates RF energy that can possibly cause interference with other devices and/or systems.

To avoid such interference, turn off the transceiver in areas where signs are posted to do so. Never operate transceivers in areas that are sensitive to electromagnetic radiation such as hospitals, blasting sites, aboard aircraft and similar advanced vehicles etc. Do not expose magnetic cards such as credit cards in a very close vicinity to a transceiver; it may erase the magnetic data. A person using medical devices such as a pacemaker must not use this transceiver, as interference may cause malfunction to such medical devices.

- **Occupational/Controlled Use**

This product is used in situations that users are exposed to RF as consequence of their employment provided those users are fully aware of the potential RF hazards and can exercise control over their exposure.

- This transceiver is NOT ATEX approved and NOT intended for the use in hazardous explosive atmospheres.
- California residents only: Please note per Proposition 65 that Li-Ion battery pack in this product may contain chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

NOTICE/Compliance Information Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the transceiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.



**Tested to Comply
With FCC Standards
FOR HOME OR OFFICE USE**

VHF FM HANDHELD TRANSCEIVER DJ-A11 / 136-174MHz

UHF FM HANDHELD TRANSCEIVER DJ-A41 / 400-470MHz

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Manufacturer:

ALINCO, Inc. Electronics Division

Yodoyabashi Dai Bldg 13F, 4-4-9, Koraibashi, Chuo-ku, Osaka 541-0043 JAPAN

For Customers in Canada :

MODEL : 3070C-DJA11

3070C-DJA41

An operator's license is required for this device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence.

L'exploitation est autorisée aux deux conditions suivantes:

(1) l'appareil ne doit pas produire de brouillage, et.

(2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.



Check with your local waste officials for details on recycling or proper disposal in your area.



Tested to comply MIL-STD-810G

-Shock: Method 514.6/I,IV -Vibration: Method 516.6/I

Copyright © All rights reserved. No part of this document may be reproduced, translated or transcribed in any form or by any means without the prior permission of Alinco. Inc., Osaka, Japan.







Alinco and ALINCO logo are registered trademarks of Alinco incorporated, Japan in United States, EU States, Russia, China and many other countries. Windows is a registered trademark of Microsoft Corporation in the United States and other countries. All other trademarks are the properties of their respective holders.

ALINCO and authorized dealers are not responsible for any typographical errors there may be in this manual. The contents of this manual may be updated without any notice or obligation.

Alinco cannot be liable for pictorial or typographical inaccuracies. Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.










WARNING



To prevent any hazard during operation of Alinco's radio product, in this manual and on the product you may find symbols shown below. Please read and understand the meanings of these symbols before starting to use the product.

 Danger	This symbol is intended to alert the user to an immediate danger that may cause loss of life and property if the user disregards the warning.
 Alert	This symbol is intended to alert the user to a possible hazard that may cause loss of life and property if the user disregards the warning.
 Caution	This symbol is intended to alert the user a possible hazard that may cause loss of property or injure the user if the warning is disregarded.
	Alert symbol. An explanation is given.
	Warning symbol. An explanation is given.
	Instruction symbol. An explanation is given.





Alert

■ Environment and condition of use




-  Use of this product may be prohibited or illegal outside of your country. Be informed in advance when you travel.
-  It is recommended that you check local traffic regulations regarding the use of a radio equipment while driving. Some countries prohibit or apply restrictions for the operation of radios and mobile-phones while driving.
-  Do not use this product in close proximity to other electronic devices, especially medical ones. It may cause interference to those devices.
-  Keep the radio out of the reach of children.
-  In case a liquid leaks from the product, do not touch it. It may damage your skin. Rinse with plenty of cold water if the liquid contacted your skin.
-  Never operate this product in facilities where radio products are prohibited for use such as aboard aircraft, in airports, in ports, within or near the operating area of business wireless stations or their relay stations.
-  The manufacturer declines any responsibilities against loss of life and/or a property due to a failure of this product when used to perform important tasks like life-guarding, surveillance, and rescue.
-  Do not use multiple radios in very close proximity. It may cause interference and/or damage to the product(s).
-  Risk of explosion if battery is replaced with an incorrect type. Dispose of, or recycle used batteries according to your local regulations.



-  The manufacturer declines any responsibilities against loss of life and property due to a failure of this product when used with or as a part of a device made by third parties.
-  Use of third party accessory may result in damage to this product. It will void our warranty for repair.

■ Handling this product

-  Be sure to reduce the audio output level to minimum before using an earphone or a headset. Excessive audio may damage hearing.
-  Do not open the unit without permission or instruction from the manufacturer. Unauthorized modification or repair may result in electric shock, fire and/or malfunction and voids warranty.
-  Do not operate this product in a wet place such as in a shower room. It may result in electric shock, fire and/or malfunction, This product is splash-proof but not a complete water-proof.
-  Do not place the product in a container carrying conductive materials, such as water or metal in close proximity. A short-circuit to the product may result in electric shock, fire and/or malfunction.

■ About chargers


-  Do not use adapters other than having the specified voltage. It may result in electric shock, fire and/or malfunction, Never turn on the radio while charging.
-  Do not plug multiple devices using an adapter into a single wall outlet. It may result in overheating and/or fire.
-  Do not handle adapter with a wet hand. It may result in electric shock.

-  Securely plug the adapter into the wall outlet. Insecure installation may result in short-circuit, electronic shock and/or fire.
-  Do not use the adapter if the plug or socket contacts are dirty. Overheating and/or short-circuiting may result in fire, electric shock and/or damage to the product.


■ In case of emergency

In case of the following situation(s), please turn off the product, switch off the source of power, then remove or unplug the power-cord. Please contact your local dealer of this product for service and assistance. Do not use the product until the trouble is resolved. Do not try to troubleshoot the problem by yourself.

- When a strange sound, smoke and/or strange odor comes out of the product.
- When the product is dropped or the case is broken or cracked.
- When a liquid penetrated inside.
- When a power cord (including DC cables, AC cables and adapters) is damaged






-  For your safety, turn off then remove all related AC lines to the product and its accessories from the wall outlet if a thunderstorm is likely.

■ Maintenance





-  Do not open the unit and its accessories. Please consult with your local dealer of this product for service and assistance

Caution

■ **Environment and condition of use**

-  Do not use the product in proximity to a TV or a radio. It may cause interference or receive interference.
-  Do not install in a humid, dusty or insufficiently ventilated place. It may result in electric shock, fire and/or malfunction.
-  Do not install in an unstable or vibrating position. It may result in electric shock, fire and/or malfunction when/if the product falls to the ground.
-  Do not install the product in proximity to a source of heat and humidity such as a heater or a stove. Avoid placing the unit in direct sunlight.
-  Be cautious of a dew formation. Please completely dry the product before use when it happens.

■ **About transceiver**

-  Be cautious of the whip antenna when carried in your shirt-pocket etc. It may make contact with your eye and cause injury.
-  Do not connect devices other than specified ones to the jacks and ports on the product. It may result in damage to the devices.
-  Turn off and remove the power source (AC cable, DC cable, battery, cigar cable, charger adapter etc.) from the product when the product is not in use for extended period of time or in case of maintenance.
-  Never pull the cord alone when you unplug AC cable from the wall outlet.



Use a clean, dry cloth to wipe off dirt and condensation from the surface of the product. Never use thinner or benzene for cleaning.



Check with your local waste officials for details on recycling or proper disposal of the electronics product, battery-packs and accessories in your area.



■ PC PROGRAMMING

NOTE: The utility software may be available to distributors/dealers only. USB programming cable is required. The manufacturer will not release the software to unauthorized party so please contact your dealer for details.

Available features in this product may not be usable in your country due to your local regulations. Please consult with your dealer before purchase.

STANDARD ACCESSORIES.....	1
Standard Accessories	1
BATTERY INFORMATION.....	2
Charging Operation.....	2
Battery Charger Type.....	2
Notice for Charging Battery.....	2
How to Charge	4
How to Store the Battery.....	6
PREPARATION.....	7
Installing / Removing the Battery	7
Installing / Removing the Antenna	7
Installing / Removing the Belt Clip	8
Accessories	8
Installing/ Removing the Hand Strap	9
GETTING ACQUAINTED.....	10
Indicator Status and Beep	12
[PF1] & [PF2] Key Default.....	12
BASIC OPERATIONS.....	13

o CONTENTS

Switch on / off Transceiver	13
Adjusting Audio output level	13
Channels Selection	13
Group Selection	14
Receiving	14
Transmitting	14
Emergency Alarm Function	15
ADVANCED OPERATIONS	16
Call 1/Call 2 DTMF	16
Monitor	16
Momentary Monitor	16
Temporary Deletion of the Interfering Channel from scanning	17
Squelch Levels Enquiry	17
Squelch Levels Setup	17
Scan	17
Scramble Setup (Encryption)	18
Squelch off	18
Temporary Squelch off	18
Talk Around	18

Frequency Reverse.....	19
Current Channel Power Enquiry	19
TX Power Switch.....	19
Whisper.....	20
Voice Comander (Reduce Noise & Enhance Audio Clarity).....	20
Battery Capacity Enquiry	20
Current Channel Enquiry	20
Channel Selector Knob Lockout	21
PRESET OPERATIONS.....	22
CTCSS / DCS Encode / Decode.....	22
Optional Signaling	22
Wide / Narrow Band Setup	23
Busy Channel Lockout.....	23
Signaling Relations Setup.....	23
Channel Scan Skip	24
TX OFF	24
Battery Save Setup.....	24
Time-out Timer.....	24
Time-Out Timer Pre-Alarm.....	25

◦ CONTENTS

TOT Re-transmitting Time Setup	25
VOX Function.....	25
Priority Scan Setup	25
Resume Factory Default	26
OPTIONAL ACCESSORIES	27
RECOMMENDED INSTALLATION OF EARPHONE MICROPHONE	28
TECHNICAL SPECIFICATIONS	29
DJ-A11 TECHNICAL SPECIFICATIONS	29
DJ-A41 TECHNICAL SPECIFICATIONS	30
DJ-A36 TECHNICAL SPECIFICATIONS	31
TROUBLE SHOOTING GUIDE.....	32
ATTACHED CHARTS	34
CTCSS Frequency Chart.....	34
DCS Chart.....	35

(((Standard Accessories



Antenna



Li-ion Battery Pack



Charger



AC Adaptor



Belt Clip



Instruction
Manual



Hand Strap

NOTE: Accessories may differ depending on the version you have purchased. Please contact your local dealer for details of standard accessories and the warranty-policy before purchase.

○ BATTERY INFORMATION

(((Charging Operation

The battery is not charged at the factory, so please charge it before use.

Charge the battery for the first time after purchase or extended storage (more than 2 months) may not bring the battery to its normal operating capacity. After repeating fully charge/ discharge cycle, the operating capacity will reach the best performance. The battery life is over when its operating time decreases even though it is fully and correctly charged and it must be replaced to a new one.

(((Battery Charger Type

Please use Alinco's designated charger, other models may cause explosion. After installing the battery pack, if the radio displays low battery with red flashing lamp or voice prompt, please charge the battery.

(((Notice for Charging Battery

- ▼ Do not shortcircuit the charger. Never attempt to remove the casing from the battery, otherwise the warranty is void and you risk serious damage to yourself and properties.
- ▼ The ambient temperature should be between 5°C and 40°C while charging. Charging outside this range may not charge the battery.
- ▼ Always switch OFF the transceiver before charging. Otherwise, it may not charge correctly.
- ▼ To avoid interfering the charging procedure, please do not cut off the power or take out the battery during charging.
- ▼ Do not recharge the battery if it is already fully charged. This may shorten the life of the battery or damage the battery.
- ▼ Do not charge the battery or transceiver when wet. Dry it before charging to avoid danger.


Caution:

- ▼ Risk of explosion, generation of heat or leak of chemicals inside if the battery is replaced by an incorrect type or reverse polarity. Use always the recommended types of batteries in this manual only.
- ▼ The battery pack isn't fully charged when shipped. It must be charged before use.
- ▼ Charging should be conducted in a temperature range of +5°C to +40°C (+41°F to +104°F).
- ▼ Don't modify, dismantle, incinerate or immerse the battery pack in the water as this can be dangerous.
- ▼ Never short-circuit the battery pack terminals, as this can cause damage to the equipment or lead to heating of the battery which may cause burns.
- ▼ Unnecessary prolonged charging (overcharging) can deteriorate battery performance.
- ▼ The battery pack should be stored in a dry place where temperature is in -10°C to +45°C (-14°F to +113°F) range. Temperatures outside this range can cause the battery liquid to leak. Exposure to prolonged high humidity can cause corrosion of metal components.
- ▼ Battery-packs are a consuming part. When its operating time becomes considerably short after a normal charge, please consider that the pack is exhausted and replace it with a new one.
- ▼ The battery pack is recyclable. Check with your local waste officials for details on recycling options or proper disposal in your area.
- ▼ Use specified genuine chargers only to charge battery packs. Use of other chargers may cause damage to products, you and your property.
- ▼ Never carry battery packs together with conductive articles such as metals in a same bag to prevent from short-circuiting. Put the packs only in nylon bags to carry them safely.
- ▼ Even if you do not use the battery pack for a long time, charge it at least once every three months to prevent deterioration.

• BATTERY INFORMATION

(((How to Charge

1. Plug the AC adaptor into the AC outlet, and then plug the cable of the AC adaptor into the DC jack located on the back of the Charger. The Indicator lights orange (1s) and then goes out----waits to charge.
2. Plug the battery or transceiver into the charger. Make sure that the battery terminals are in contact with charging terminals well. The Indicator turns into twinkling red----Pre-charging begins.
3. After pre-charging for about 5 minutes, the indicator will stop twinkling----charging begins.
4. It takes approximately 4 hours to fully charge the battery. When the lamp lights green, the charging is finished. Remove the battery or the transceiver equipped with battery from the stand.

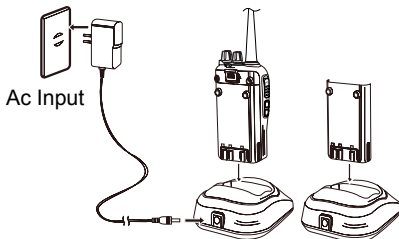

NOTE: Please always turn off the unit while charging. When the unit is turned on, the charge can't be performed correctly.

5. LED Indicator:

STATUS	Self-Examine When Power on	No Battery	Pre-charging	Charge Normally	Fully Charged	Trouble
LED	Orange (for 1 second)	None	Red Light Twinkles for 5 Minutes	Red	Green	Red twinkles for a long time

NOTE:

- ▼ Trouble means battery heating, short-circuit or charger malfunction. Remove the battery pack from the charger immediately and contact to your local dealer for services.
- ▼ The max trickle pre-charging time is 30 minutes. In case the red indicator continues to blink longer, please stop charging and consult with your local dealer for services.
- ▼ It is known that Li-Ion battery packs heat up over 400°C by itself when kept in a temperature of over 80°C for extended period of time. Although the packs are protected against overheating with a protective circuit, never leave the battery packs in a car or similar locations in hot seasons.
- ▼ Li-ion packs may deteriorate by over 30% regardless of conditions after 3 years. This is a nature of Li-ion pack and not a defect of the product.
- ▼ The charger is to charge the battery pack only. It is not an AC adapter to operate the radio. Never attempt to transmit the radio with using the charger as it will cause the damage to the charger and a repair/replace may become necessary.
- ▼ The charge should be conducted in an ambient temperature with a minimum proper air-conditioning in an extremely hot or cold seasons.
- ▼ Try charging the battery pack only when having trouble charging with the radio. In case the radio may have troubles, the charge can't be conducted properly. If the battery pack can be charged alone, please take the radio to your local dealer for services.
- ▼ Battery pack discharges faster when it is attached to the radio. Please always remove it from the radio when not in use.

◦ BATTERY INFORMATION


(((How to Store the Battery

1. The battery should be kept in the status of 50% above discharge when storing.
2. Remove the battery pack from the radio and keep it in a cool, dry place.
3. Keep away from source of heat and direct sunlight.

NOTE: Incorrect storage will damage both the battery pack and the radio. Please always remove the battery pack from the radio when not in use.

(((Installing / Removing the Battery

1. Match the three grooves of the battery pack with the corresponding guides on the back of the transceiver, and then push it.
2. Press the battery pack until the release latch on the top of the transceiver locks. After hearing a “click” sounds, the battery has been locked.
3. To remove the battery pack, slide up the release latch and remove the pack away from the transceiver.

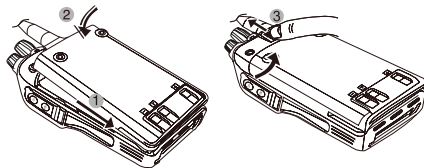


(((Installing / Removing the Antenna

Installing the Antenna

1. Hold the antenna by its base.
2. Align the grooves at the base of the antenna with the protrusions on the antenna connector.
3. Slide the antenna down and turn it clockwise until it stops.
4. Confirm that the antenna is securely connected. Check and secure the connection from time to time.

Removing the Antenna:

Turn the antenna counter-clockwise to disconnect the antenna.

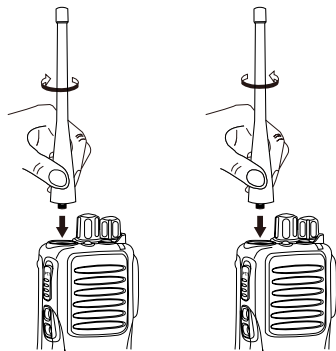

NOTE: Do not use third-party antenna as it may radiate more RF that exceeds SAR limit guidances.

◦ PREPARATION


(((Installing / Removing the Belt Clip

■ Installing the Belt Clip:

1. Put the belt clip on the back of the unit, and the screw clockwise until it stops.
2. Confirm that the belt clip is securely attached.
* Tighten up the screw occasionally.

■ Removing the Belt Clip:

Turn the screw counter-clockwise to remove the belt clip.
Caution: Use the screws of specified size only. Others may cause damage to the product. (screws size PM Φ 2.5mm x 3mm)




(((Accessories

Remove the jack cover and insert the accessory plug into the jack, as shown.

When the accessory is not used, please be sure to put on cover securely.


Note:

1. To keep the radio dust and splash resistant, the cover must be closed properly with the original supplied cover.
2. The radio is not dust and splash resistant while using the optional accessory risking that the water may penetrate inside through the plug.

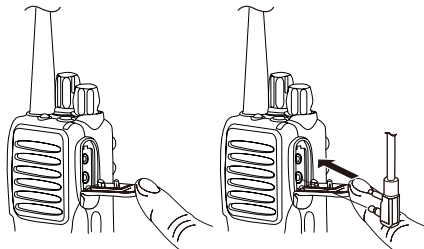


(((**Installing/ Removing the Hand Strap**

Attach the hand strap as shown.

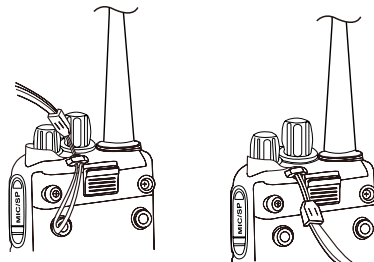

• GETTING ACQUAINTED

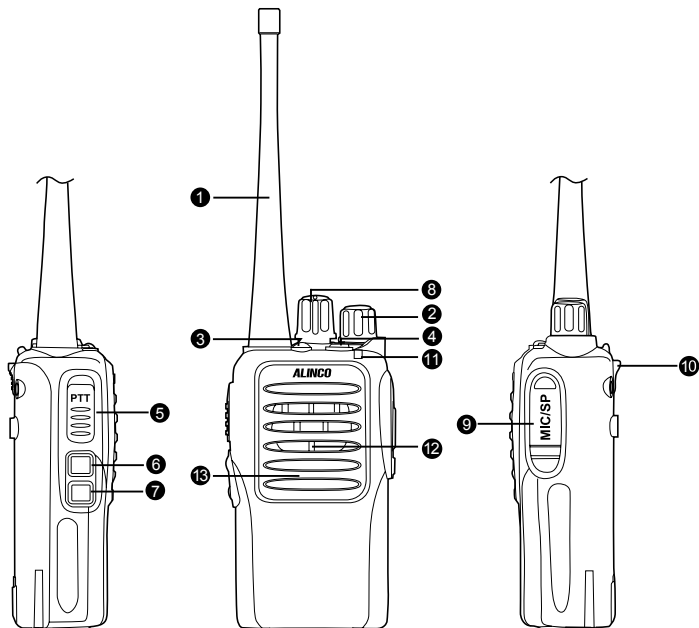

① Antenna

② POWER / VOLUME Switch: To turn on/off the power and adjust the audio level.

③ Jacklight: White is lit when the alarm key is pressed.

④ Emergency Alarm Key

(1) Under the standby conditions, press this key for 1 second to enable alarm function. Press this key again to exit the alarm status. This is optional and PC preprogramming is required.

(2) Under the standby conditions, press this key to start jacklight, press this key again to turn it off.

⑤ PTT Key: Press and hold this key to transmit. Release the key to receive.

⑥ PF1 Key: Function key 1

⑦ PF2 Key: Function key 2

⑧ Channel Selector Knob: Turn the selector knob to select desired channel.

⑨ Optional accessory port

⑩ Battery Lock

⑪ Indicator : Green is lit while receiving a signal, Red while transmitting.

⑫ Speaker

⑬ Microphone (MIC)

NOTE : Do not cover the microphone hole by the sticker, the label and so on.

◦ GETTING ACQUAINTED

(((Indicator Status and Beep

Low battery voltage warning	Transceiver emits a low voltage beep at intervals of 60 seconds, and red light blinks.
TX/Reading data	Red is lit while transmitting or reading the data while programming.
RX/Writing data	Green is lit while receiving or writing the data while programming.
Scan	Green blinks every second while scanning.
DTMF Successfully Decoded	Green and red alternatively blinks.
Key Operation	A beep sounds when activating a function. Beeps twice when exiting from a function.

((([PF1] & [PF2] Key Default

Press [PF1]	Battery Capacity Enquiry
Press [PF2]	Squelch off
Press and hold [PF1]	Whisper
Press and hold [PF2]	TX Power Switch

(((Switch on / off Transceiver

Turn **【POWER】** / **【VOLUME】** dial clockwise to power on.

Turn it counterclockwise to power off.

(((Adjusting Audio output level

Press and release **【PF2】** key to monitor white noise to refer to the current audio level.

Turn **【POWER】** / **【VOLUME】** clockwise to increase the audio level, counterclockwise to decrease.

CAUTION:

Never use earphone while adjusting audio level. The max audio output is loud enough to hurt your eardrums. You may feel a static shock when wearing an earphone in a dry atmosphere but it's not a defect of product but a cause of nature. It is the same shock you feel typically when opening a door of a car in certain conditions.

(((Channels Selection

Under the standby conditions, turn channel selector knob to choose the desired channel, and the transceiver will announce the selected channel number. Turn clockwise to increase the channel number, counterclockwise to decrease.

NOTE: The empty channel will be announced as blank.

◦ BASIC OPERATIONS

(((Group Selection

By PC-preprogramming, 128 channels can be assigned in total which are divided into 8 groups with 16 channels in each group. If different groups are being programmed, after the first channel is selected, press and hold **[PF2]** to turn on. Still holding **[PF2]** for another 2 seconds, it will announce the current group number. Turn the selector knob to choose the desired group. The voice announce will tell you the selected group number.

NOTE: You can enable or disable the group selection function by programming software.

(((Receiving

When the channel you are operating is called, LED GREEN lights, then you hear the voice from transmitting party.

NOTE: If your transceiver has set higher squelch level or being programmed with signaling features, it may fail to hear the calling.

(((Transmitting

Press and release the **[PF2]** key to monitor for a while to confirm the channel desired is not busy. Press and hold **[PTT]** key to speak into microphone (MIC). Keep the distance of about 2.5~5cm between your lips and MIC, and speak at normal voice level.

NOTE: Press [PTT] key, red is lit indicating it is transmitting. Release [PTT] to receive.

(((**Emergency Alarm Function (PC pre-programming required)**

Press the emergency alarm key for over 1 second to start the Emergency Alarm Function. Once activated, it will generate alarm sound, start transmitting to send alarm beeps. Turn off then turn on again or pressing Emergency Alarm key again to exit the function.

◦ **ADVANCED OPERATIONS**

The **[PF1]** and **[PF2]** keys are programmable by dealer to assign following features by using programming software.

NOTE: When programming the following functions, you need to press the [PF1] / [PF2] key for one second till the transceiver beeps and then release the key to operate the programmed function.

Call 1/Call 2 DTMF

Under the standby conditions, press the programmed key to transmit the prestored and selected DTMF signaling.

Monitor

Under the standby conditions, pressing and releasing the programmed key, it beeps and enters the monitor state. While in Monitor, it ignores CTCSS / DCS decode and enables monitoring all incoming signals. Press this key again, it beeps twice and exits the monitor state.

Momentary Monitor

Under the standby conditions, pressing and holding the programmed key, it beeps and enters the monitor state. While in Monitor, it ignores CTCSS / DCS decode and enables monitoring all incoming signals. Press this key again, it beeps twice and exits the monitor state.

Temporary Deletion of the Interfering Channel from scanning

This function can temporarily skip the interfering channel or occupied channel from scan list. When scan stops on one channel, pressing the programmed key; it beeps and temporarily deletes this channel from the scan list. If only one or two channels are in the scan list, this operation is not available. Restart the transceiver to restore the temporarily deleted channels into the list again.

Squelch Levels Enquiry

Under the standby conditions, pressing and holding the programmed key, it will announce current squelch level by voice.

Squelch Levels Setup

Under the standby conditions, pressing and holding the programmed key, it will set the squelch and announces the level by voice.

Scan

Scan function is to automatically search the busy channels. Under the standby conditions, pressing and holding the programmed key, a beep sounds and starts scanning. It scans channels in scan list one by one. When one channel receives a matching signal, the transceiver will temporarily stay in this channel till the signal disappears. Pressing the key again, it beeps twice, and stops scanning and returns to the channel pre-programmed as "return-channel".

◦ **ADVANCED OPERATIONS**

Scramble Setup (Encryption)

This special audio process can offer a more confidential communications.

Under the standby conditions, pressing and holding the programmed key, it beeps and enables Scramble function. Repeat the same operation, it beeps twice and disables.

NOTE: This is a simple analog scrambling (inversion scrambling) and the security level is low.

Squelch off

Pressing the programmed key, squelch opens and the background noise is heard. Press this key again, it beeps twice, and the squelch closes. By using this function you can monitor weaker signals.

Temporary Squelch off

Pressing and holding the programmed key, squelch opens and the background noise is heard. Release this key again, it beeps twice, and the squelch closes. By using this function you can monitor weaker signals.

Talk Around

Under the standby conditions, pressing and holding the programmed key, it beeps and activates Talk Around. In case of semi-duplex channels, it will transmit on receiving frequency and CTCSS / DCS

encode/decode setting will be reversed. This enables the user to talk to other users without using the repeater. Press the key again, it beeps twice and Talk-around is deactivated.

Note: Under the talk around state, the transceiver can not communicate with other transceivers through repeaters.

(((Frequency Reverse

Under the standby conditions, pressing and holding the programmed key, it beeps and activates Frequency Reverse. In this condition, the current receiving frequency is switched to the transmitting channel's, and the CTCSS or DCS encode/decode setting will be interchanged. Pressing this key again, it beeps twice and exits reverse function. This is to monitor other stations without using repeaters.

(((Current Channel Power Enquiry

Under the standby conditions, pressing the programmed key, it will announce the current output setting of the selected channel.

(((TX Power Switch

Under the standby conditions, pressing the programmed key, it beeps and will change the output power setting of the selected channel.

◦ **ADVANCED OPERATIONS**

Whisper

Under the standby conditions, pressing the programmed key, it beeps and activates whisper function. This feature is handy in quiet place, you can talk in lower voice than usual. Pressing this key again, it beeps twice and exits whisper function.

Voice Comander (Reduce Noise & Enhance Audio Clarity)

Under the standby conditions, pressing the programmed key, it beeps and activates the function. This feature reduces the back-ground noise and enhances audio clarity. Pressing this key again, it beeps twice and exits the function.

Note: All users must have the compander-compatible radios to enjoy the feature. Use this function only to communicate with non-compander radios.

Battery Capacity Enquiry

Under the standby conditions, pressing the programmed key, it will announce the current battery level.

Current Channel Enquiry

Under the standby conditions, pressing the programmed key, it will announce the current channel number.

(((**Channel Selector Knob Lockout**

Under the standby conditions, pressing the programmed key, it will announce the current channel number. Enable this function to prevent normal communication failure caused by channel misadjustment.

Under the standby conditions, pressing the programmed key, it beeps and locks the channel selector knob. Press the key again, it beeps twice and unlocks the knob.

PRESET OPERATIONS

Following features can be set by using dealer-programming software.

CTCSS / DCS Encode / Decode

It enables the CTCSS/DCS encode/decode setting. Pre-programming is necessary and usually not recommended for general users.

Optional Signaling

Users can enable or disable the Optional Signaling in every channel by programming software. This Signaling function is similar to CTCSS/DCS which embodies functions as Selective Call, Group Call, All Call, PTT ID, and Remotely stun and Waken.

1. **PTT ID:** If current channel is edited with PTT ID, the transceiver will send transmitting ID when pressing or releasing PTT key.
2. You can set group call wildcard for each group by programming software. (DTMF character A, B, C, D, *, **, or #).

The caller can call different groups by sending different group call codes. When the receiving party receives a valid ID code, one or all of the characters would be replaced by wildcard characters and the receiving part can realize all call, group call or selective call. It is much easy and flexible to realize all call, group call and etc by using group call code.

For example:

Group code – "C"

	Radio A	Radio B	Radio C	Radio D
ID code of the receiving party is	123	223	235	355.

If the calling party uses "**C23**" to call, Radio A and Radio B will receive the call.

If the calling party uses "**CC5**" to call, Radio C and Radio D will receive the call.

If the calling party uses "**CCC**" to call, All Radios would receive the call.

3. This transceiver is set with 16 groups of DTMF code, users can program and use them flexibly.

(((Wide / Narrow Band Setup

The bandwidth can be set from either one of 25KHz(wide) / 20KHz(normal) or 12.5KHz(narrow). Set the proper channel-spacing value allocated to the radio services in your area. This is not a Channel-step setting, but to determine the deviation width of the modulation.

(((Busy Channel Lockout

BCLO is to restrict transmitting while RX signal is received. When Busy Channel Lockout is set to on, transmission is possible only in the specific conditions (and isn't possible otherwise). The alarm beep sounds if the **[PTT]** key is pressed when transmission is prohibited. Busy Channel Lockout mode available by programming software are as follows.

1. **BCL:** Enable BCL, carrier wave lockout, transmitting is prohibited when receives any carrier.
2. **BTL:** Enable BTL, transmitting is prohibited when current channel receives a carrier signal that CTCSS/DCS tones are different from your group's.
3. **OFF:** Busy channel lockout is disabled. Default is OFF.

(((Signaling Relations Setup

Users can set relations between CTCSS/DCS signal and DTMF signal by programming software.

AND: Only when a matching CTCSS/DCS signal and a DTMF signal are received, can calling of other party be heard.

◦ PRESET OPERATIONS

OR: As long as a matching CTCSS/DCS signal or a DTMF signal is received, calling of the other party can be heard.

(((Channel Scan Skip

Users can choose whether to set current channel as Scan Skip by programming software. Transceiver will skip current channel during scan when it is set as Scan Skip.

(((TX OFF

Once this function is enabled, [PTT] key becomes invalid and it works only as a receiver.

(((Battery Save Setup

This function prevents useless battery consumption by switching the power ON/OFF at a fixed ratio if there is no key operation or receiving signal for a continuous period of 5 seconds or more. Higher OFF time (1:4 setting) saves more amount of battery but may cause slight delay on receiving. The Battery Save function is temporarily suspended when a key is operated or a signal is received.

(((Time-out Timer

This function stops the transmission automatically when the continuous transmission time exceeds the set time and alerts it with a voice.

(((**Time-Out Timer Pre-Alarm**

This is the alarm that warns the user before TOT stops the transmission.

(((**TOT Re-transmitting Time Setup**

This is the penalty time before resuming the normal operation condition, once TOT stopped the transmission.

(((**VOX Function**

After enabling this function, you can directly start transmitting by voice instead of pressing [PTT] key. (An optional earphone-microphone is necessary)

(((**Priority Scan Setup**

This transceiver can be set with two priority channels at the same time. Users can set the desired priority scan by programming software. If transceiver set priority scan, under scanning and receiving no signal state, it will scan every channel and also test priority channel at a time. When the non-priority channel receives signal, it will test priority channel according to flyback time A and flyback time B setup by users.

◦ PRESET OPERATIONS


(((Resume Factory Default

You can reset the settings to the factory default when it can't work properly or simply you wish to change settings. Press **[PTT]** and **[PF1]** key together while turning on. Keep holding the two keys for more than 1 second. It will resume factory default after announcing current channel number.

Note: This function may be prohibited by dealer programming.

EA-211	VHF & FM radio Antenna(DJ-A11)
EA-212	UHF & FM radio Antenna(DJ-A41)
EA-218	UHF & FM radio Antenna(DJ-A36)
EBC-34	Belt Clip
EBP-87	Li-ion Battery Pack (DC 7.4V 1500mAh)
EBP-88	Li-ion Battery Pack (DC 7.4V 1700mAh)
EDC-189	Li-ion Battery Charger
EDC-190E	AC Adaptor (220V Linear type)
EDC-191E	AC Adaptor (220V)
EDC-191T	AC Adaptor (120V)
EME-56A	Earphone Microphone
EMS-76	Speaker microphone

RECOMMENDED INSTALLATION OF EARPHONE MICROPHONE

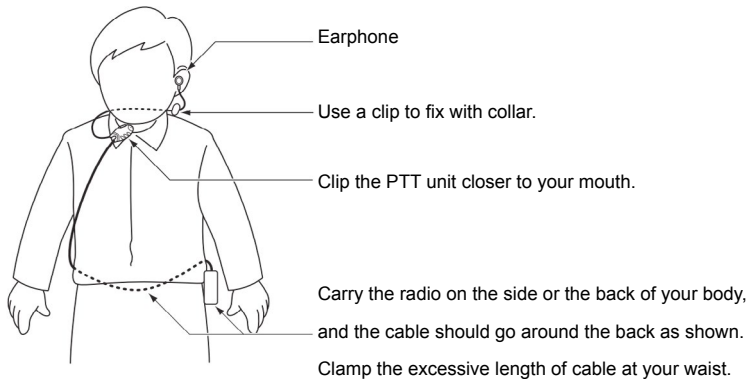

(((**DJ-A11 TECHNICAL SPECIFICATIONS**

General	
Frequency Range	VHF: 136-174MHz
Channel Capacity	128 channels
Channel Spacing	25KHz (Wide Band) 20KHz(Middle Band) 12.5KHz (Narrow Band)
Phase-locked Step	5KHz, 6.25KHz
Operating Voltage	7.4V DC \pm 20%
Battery Life	More than 14 Hours (1500mAh), by 5-5-90 work cycle
Frequency Stability	\pm 2.5ppm
Operating Temperature	-20°C~ +55°C
Size	260×60×35mm (with battery pack, antenna)
Weight	208g (with battery pack, antenna)

Receiving Part(ETSI EN 300 086 Standard Test)		
	Wide band	Narrow band
Sensitivity(12dB SINAD)	\leq 0.25 μ V	\leq 0.35 μ V

Adjacent Channel Selectivity	\geq 70dB	\geq 60dB
Intermodulation	\geq 65dB	\geq 60dB
Spurious Rejection	\geq 70dB	\geq 70dB
Audio Response	+1~-3dB (0.3~3KHz)	+1~-3dB (0.3~2.55KHz)
Hum & Noise	\geq 45dB	\geq 40dB
Audio Distortion	\leq 5%	
Audio Power Output	1000mW/10%	
Transmitting Part(ETSI EN 300 086 Standard Test)		
	Wide band	Narrow band
Power Output	5W/2W/0.5W	
Modulation	16K Φ F3E	11K Φ F3E
Adjacent Channel Power	\geq 70dB	\geq 65B
Hum & Noise	\geq 40dB	\geq 36dB
Spurious Emission	\leq -36dB	\leq -36dB
Audio Response	+1~-3dB (0.3~3KHz)	+1~-3dB (0.3~2.25KHz)
Audio Distortion	\leq 5%	

TECHNICAL SPECIFICATIONS

DJ-A41 TECHNICAL SPECIFICATIONS

General	
Frequency Range	UHF: 400-470MHz
Channel Capacity	128 channels
Channel Spacing	25KHz (Wide Band) 20KHz(Middle Band) 12.5KHz (Narrow Band)
Phase-locked Step	5KHz, 6.25KHz
Operating Voltage	7.4V DC \pm 20%
Battery Life	More than 14 Hours (1500mAh), by 5-5-90 work cycle
Frequency Stability	\pm 2.5ppm
Operating Temperature	-20°C~ +55°C
Size	260×60×35mm (with battery pack, antenna)
Weight	208 g (with battery pack, antenna)

Receiving Part(ETSI EN 300 086 Standard Test)		
	Wide band	Narrow band
Sensitivity(12dB SINAD)	\leq 0.25 μ V	\leq 0.35 μ V

Adjacent Channel Selectivity	\geq 70dB	\geq 60dB
Intermodulation	\geq 65dB	\geq 60dB
Spurious Rejection	\geq 70dB	\geq 70dB
Audio Response	+1~-3dB (0.3~3KHz)	+1~-3dB (0.3~2.55KHz)
Hum & Noise	\geq 40dB	\geq 36dB
Audio Distortion	\leq 5%	
Audio Power Output	1000mW/10%	
Transmitting Part(ETSI EN 300 086 Standard Test)		
	Wide band	Narrow band
Power Output	5W/2W/0.5W	
Modulation	16K Φ F3E	11K Φ F3E
Adjacent Channel Power	\geq 70dB	\geq 65B
Hum & Noise	\geq 40dB	\geq 36dB
Spurious Emission	\leq -36dB	\leq -36dB
Audio Response	+1~-3dB (0.3~3KHz)	+1~-3dB (0.3~2.25KHz)
Audio Distortion	\leq 5%	

(((**DJ-A36 TECHNICAL SPECIFICATIONS**

General	
Frequency Range	UHF: 350-390MHz
Channel Capacity	128 channels
Channel Spacing	25KHz (Wide Band) 20KHz(Middle Band) 12.5KHz (Narrow Band)
Phase-locked Step	5KHz, 6.25KHz
Operating Voltage	7.4V DC \pm 20%
Battery Life	More than 14 Hours (1500mAh), by 5-5-90 work cycle
Frequency Stability	\pm 2.5ppm
Operating Temperature	-20°C~ +55°C
Size	260×60×35mm (with battery pack, antenna)
Weight	208 g (with battery pack, antenna)

Receiving Part(ETSI EN 300 086 Standard Test)		
	Wide band	Narrow band
Sensitivity(12dB SINAD)	\leq 0.25 μ V	\leq 0.35 μ V

Adjacent Channel Selectivity	\geq 70dB	\geq 60dB
Intermodulation	\geq 65dB	\geq 60dB
Spurious Rejection	\geq 70dB	\geq 70dB
Audio Response	+1~-3dB (0.3~3KHz)	+1~-3dB (0.3~2.55KHz)
Hum & Noise	\geq 40dB	\geq 36dB
Audio Distortion	\leq 5%	
Audio Power Output	1000mW/10%	
Transmitting Part(ETSI EN 300 086 Standard Test)		
	Wide band	Narrow band
Power Output	5W/2.5W/1W	
Modulation	16K Φ F3E	11K Φ F3E
Adjacent Channel Power	\geq 70dB	\geq 65dB
Hum & Noise	\geq 40dB	\geq 36dB
Spurious Emission	\leq -36dB	\leq -36dB
Audio Response	+1~-3dB (0.3~3KHz)	+1~-3dB (0.3~2.25KHz)
Audio Distortion	\leq 5%	

◦ TROUBLE SHOOTING GUIDE

Problem	Corrective Action
No power	A.The battery may be exhausting. Recharge or replace the battery. B.The battery may not be installed correctly. Remove the battery and install it again. C.The power switch is broken; send it to local dealers to repair. D.Battery life is end; contact to local dealers to replace.
Battery power dies shortly after charging.	The battery is exhausted. Replace the battery pack with a new one.
Transceiver cannot scan	Squelch is open. Adjust the level.
All band is noisy	Adjust squelch level.
No sound when using earphone.	Earphone or the jack is broken. Please contact with local dealers for inspection.
Communication distance becomes short, and Low sensitivity	A.Check whether the antenna is in good conduction and the antenna base do not come adrift. B.Antenna may be broken. Consult your local dealer for services.
Cannot talk or hear other members in your group	A.Different frequency or channel, please change it. B.Different CTCSS / DCS / DTMF, please reset it. C.Out of communication range.

Can not power on or frequent power off	Check if the battery pack is securely attached.
The receiving sound level is low or intermittent	Consult with local dealers for inspection.
Receiving signal is intermittent.	A.Out of communication range or obstruct by walls, buildings etc. Change position to transmit. B.Internal components may be in trouble, please contact with local dealers to repair.
Loudspeaker sounds lower or with dry noise after certain time of usage.(Speaker magnet attracts iron powders)	Check whether the loudspeaker is broken, Iron powder or dusts is in the loudspeaker. Please contact with local dealers to repair.
Receive voice from the other parties and can not transmit	Interference is being received. BCLO activated.
Receiving indicator with green light but no sound	A.Low volume, increase the audio level. B.Volume switch or loudspeaker is broken, please contact with local dealers to repair. C.Earphone jack is broken, please contact with local dealers to repair.

NOTE: Alinco guarantees the supply of minimum-necessary spare parts such as battery-packs, components and mechanical parts for at least 5 years after the production of this product is terminated except in case of accidents beyond control.

ATTACHED CHART

CTCSS Frequency Chart

1	67.0	12	97.4	23	141.3	34	179.9	45	225.7
2	69.3	13	100.0	24	146.2	35	183.5	46	229.1
3	71.9	14	103.5	25	151.4	36	186.2	47	233.6
4	74.4	15	107.2	26	156.7	37	189.9	48	241.8
5	77.0	16	110.9	27	159.8	38	192.8	49	250.3
6	79.7	17	114.8	28	162.2	39	196.6	50	254.1
7	82.5	18	118.8	29	165.5	40	199.5		
8	85.4	19	123.0	30	167.9	41	203.5		
9	88.5	20	127.3	31	171.3	42	206.5		
10	91.5	21	131.8	32	173.8	43	210.7		
11	94.8	22	136.5	33	177.3	44	218.1		

(((DCS Chart

1	017	18	073	35	165	52	261	69	356	86	464	103	632
2	023	19	074	36	172	53	263	70	364	87	465	104	645
3	025	20	114	37	174	54	265	71	365	88	466	105	654
4	026	21	115	38	205	55	266	72	371	89	503	106	662
5	031	22	116	39	212	56	271	73	411	90	506	107	664
6	032	23	122	40	217	57	274	74	412	91	516	108	703
7	036	24	125	41	223	58	305	75	413	92	523	109	712
8	043	25	131	42	225	59	306	76	423	93	526	110	723
9	047	26	132	43	226	60	311	77	425	94	532	111	731
10	050	27	134	44	243	61	315	78	431	95	534	112	732
11	051	28	135	45	244	62	325	79	432	96	546	113	734
12	053	29	143	46	245	63	331	80	445	97	565	114	743
13	054	30	145	47	246	64	332	81	446	98	606	115	754
14	055	31	152	48	251	65	343	82	452	99	612	116	765
15	065	32	155	49	252	66	345	83	454	100	624		
16	071	33	156	50	254	67	346	84	455	101	627		
17	072	34	162	51	255	68	351	85	462	102	631		